


PR 250

Technical data


PR 251			PR 252			PR 253			PR 254			PRA 252			PRA 253			PRA 254			
n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			
Pt(kW) 20			Pt(kW) 12			Pt(kW) 8			Pt(kW) 4			Pt(kW) 12			Pt(kW) 8			Pt(kW) 4			
i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	
3.77	352	704	13.4	352	704	52.1	319	638	351.9	319	638	12.0	319	638	39.3	352	704	140.0	352	704	
4.12	319	638	16.1	352	704	57.5	352	704	365.7	266	532	15.1	266	532	47.4	352	704	168.8	352	704	
5.16	266	532	18.3	266	532	62.8	319	638	388.5	352	704	17.5	223	446	53.8	266	532	184.3	319	638	
6.00	223	446	23.1	319	638	75.2	352	704	413.8	352	704	21.2	173	346	67.7	319	638	220.6	352	704	
7.25	173	346	28.9	266	532	82.1	319	638	424.2	319	638				75.4	223	446	240.9	319	638	
			34.8	266	532	90.6	352	704	468.3	352	704				84.8	266	532	265.9	352	704	
			40.5	223	446	98.9	319	638	511.4	319	638				91.1	173	346	290.3	319	638	
			48.9	173	346	119.3	319	638	554.3	319	638				102.2	266	532	320.5	352	704	
			62.8	173	346	129.3	319	638	611.9	352	704				118.7	223	446	350.0	319	638	
						149.4	266	532	668.2	319	638				143.5	173	346	422.3	223	446	
						155.9	319	638	737.6	352	704							449.4	319	638	
						162.0	266	532	805.4	319	638							475.2	266	532	
						173.5	223	446	857.9	319	638							509.1	223	446	
						195.2	266	532	907.3	266	532							551.9	223	446	
						235.4	266	532	1052.4	319	638							615.2	173	346	
						273.3	223	446	1121.1	319	638							665.2	223	446	
						302.2	266	532	1318.2	266	532							735.5	266	532	
						330.3	173	346	1588.9	266	532							801.8	223	446	
						424.1	173	346	1845.2	223	446							1244.0	173	346	
									2369.2	223	446										

MODELLO - MODEL	PR 251			PR 252			PR 253			PR 254			PRA 252			PRA 253			PRA 254					
TIPO USCITA - OUTPUT TYPE	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P			
PESO - WEIGHT Kg.	29	20	38	35	27	44	41	32	50	47	38	56	47	38	56	53	45	62	59	50	68			
Olio - Oil Lt.	Orizzontale - Horizontal			1.0	0.8	1.2	1.3	1.1	1.5	1.5	1.3	1.7	1.7	1.5	1.9	2.6	2.4	3.8	2.6	3.0	3.0	3.0	2.8	3.2
	Verticale - Vertical			2.0	1.6	2.4	2.6	2.2	3.0	3.0	2.6	3.4	3.4	3.0	3.8	5.2	4.8	7.6	5.6	5.2	6.0	6.0	5.6	6.4

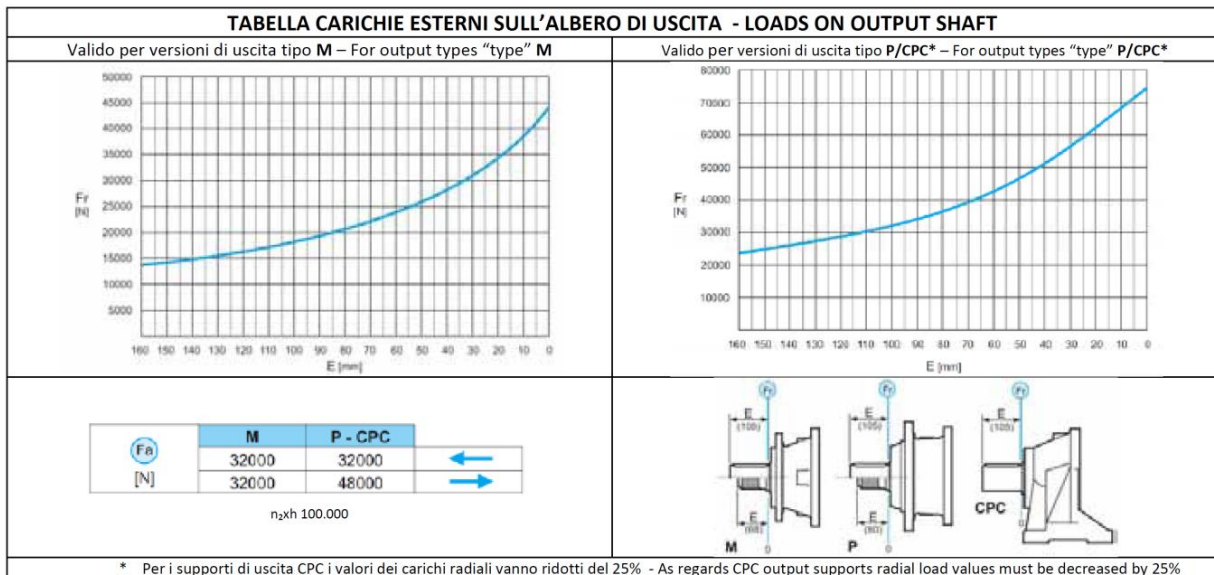


The data specified into this catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Intermot reserves the right to implement modification without notice. 15


PR 250 Special versions

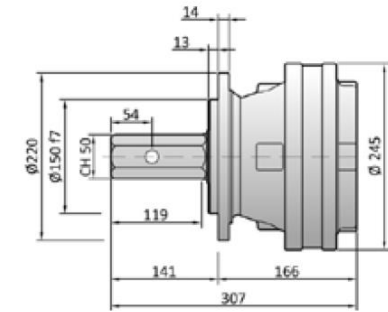



ME





FT

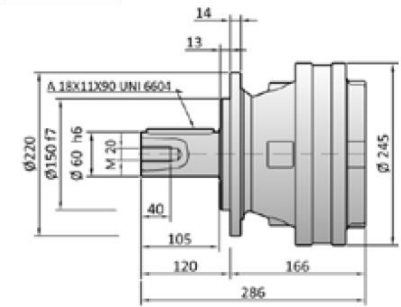

MCT

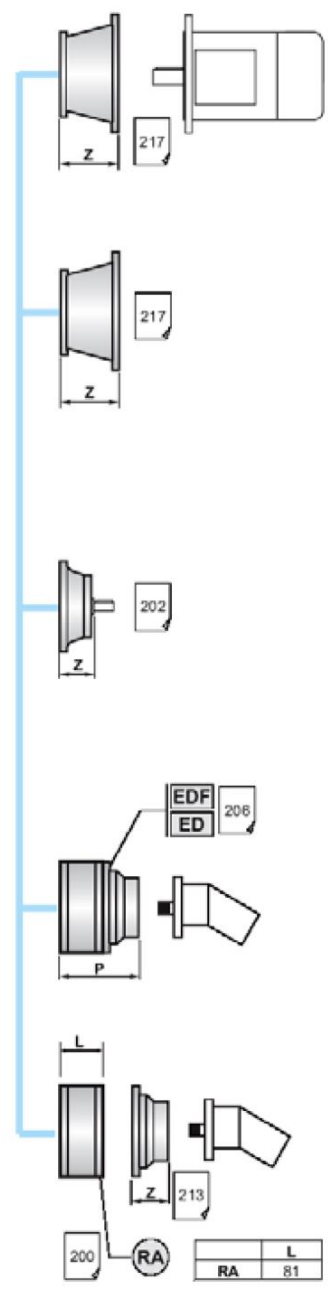

	VERSIONE USCITA - OUTPUT TYPE					ENTRATA TIPO INPUT TYPE
	MC - MS MCT - ME	F	PC - PS	CPC	FS - FT	
PR 251	A 166	A 79.5	A 173	A 212.5	A 166	A
PR 252	A 214	A 127.5	A 221	A 260.5	A 214	A
PR 253	A 262	A 175.5	A 269	A 308.5	A 262	A
PR 254	A 310	A 223.5	A 317	A 356.5	A 310	A

	VERSIONE USCITA - OUTPUT TYPE					ENTRATA TIPO INPUT TYPE
	MC - MS MCT - ME	F	PC - PS	CPC	FS - FT	
PRA 252	A 241, B 159	A 192, B 159	A 248, B 159	A 287, B 159	A 241, B 159	A
PRA 253	A 289, B 159	A 240, B 159	A 296, B 159	A 335, B 159	A 289, B 159	A
PRA 254	A 337, B 159	A 288, B 159	A 344, B 159	A 383, B 159	A 337, B 159	A

The data specified into this catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Intermot reserves the right to implement modification without notice. 17