
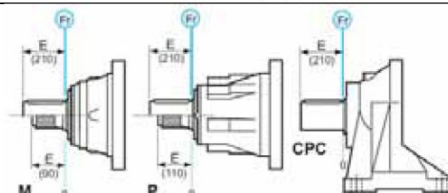


MODELLO - MODEL		PR 1802			PR 1803			PR 1804			PRA 1802			PRA 1803			PRA 1804		
TIPO USCITA - OUTPUT TYPE		M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P
PESO - WEIGHT Kg.		130	99	157	142	111	169	149	118	176	197	166	224	167	136	194	169	138	196
Olio - Oil Lt.	Orizzontale - Horizontal	3.9	3.2	5.6	4.6	3.9	6.3	4.9	4.2	6.6	5.6	4.9	7.3	5.9	5.2	7.4	6.6	5.9	8.3
	Verticale - Vertical	7.8	6.4	11.2	9.2	7.8	12.6	9.8	8.4	13.2	11.2	9.8	14.6	11.8	10.4	15.2	13.2	11.8	16.6

Valido per versioni di uscita tipo **M** – For output types “type” **M**


Valido per versioni di uscita tipo P/CPC* – For output types "type" P/CPC*

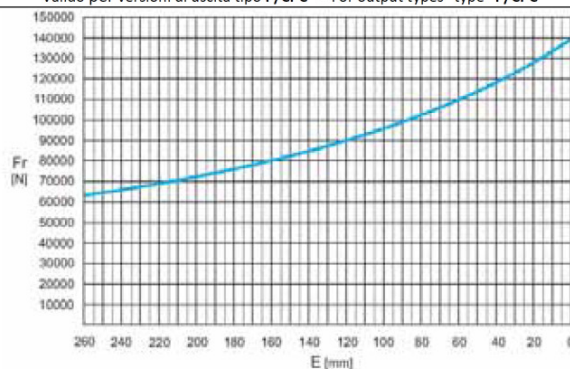

* Per i supporti di uscita CPC i valori dei carichi radiali vanno ridotti del 25% - As regards CPC output supports radial load values must be decreased by 25%


PR 1800

Dimensional drawings

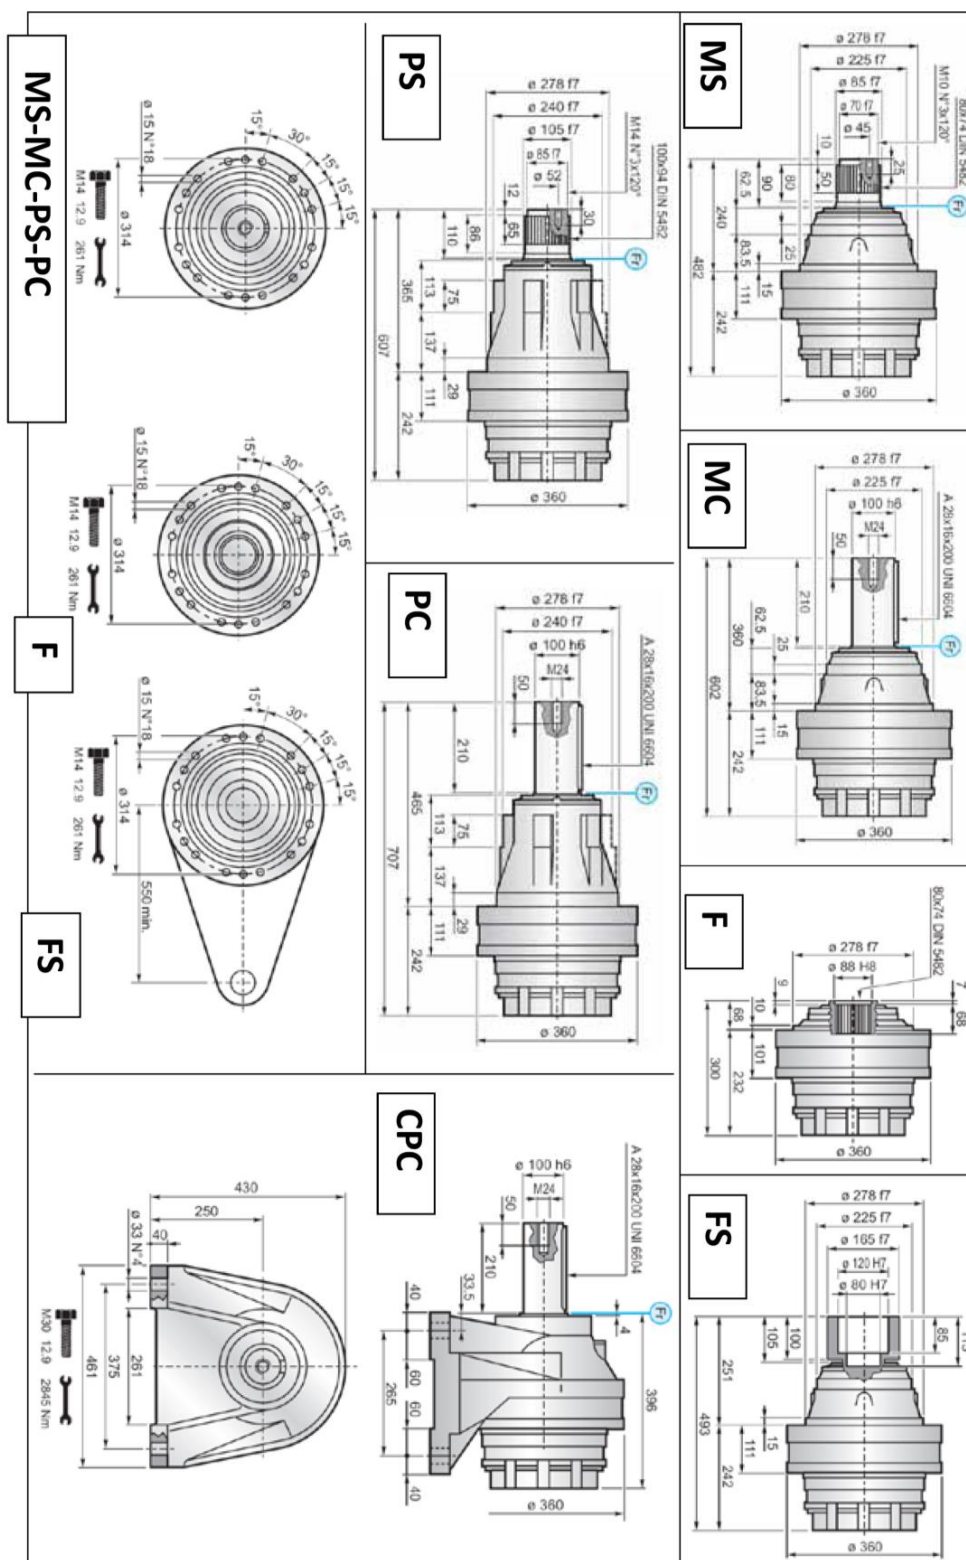



PR 1800


Special versions

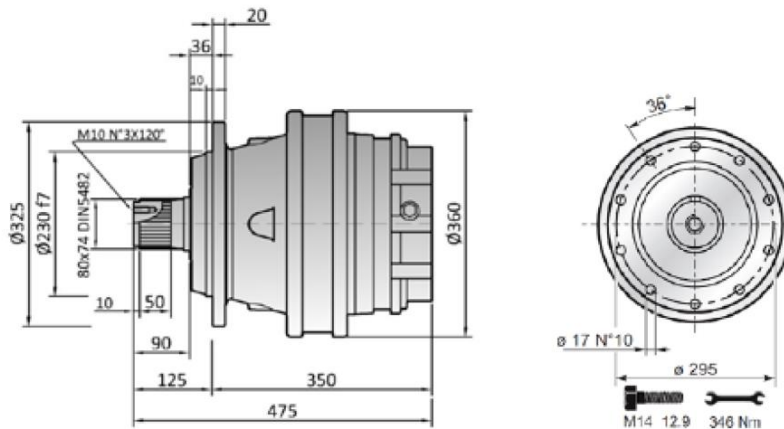

MFS

	VERSIONE USCITA – OUTPUT TYPE					ENTRATA TIPO INPUT TYPE
	MC – MS FS	F	PC – PS	CPC	MFS	
PR 1802	A 242	A 232	A 242	A 396	A 350	B
PR 1803	A 302	A 292	A 302	A 456	A 410	A
PR 1804	A 346	A 336	A 346	A 504	A 454	A

	VERSIONE USCITA – OUTPUT TYPE					ENTRATA TIPO INPUT TYPE
	MC – MS FS	F	PC – PS	CPC	MFS	
PRA 1802	A 277, B 315	A 267, B 315	A 277, B 315	A 431, B 315	A 385, B 315	A
PRA 1803	A 334, B 240	A 324, B 240	A 334, B 240	A 484, B 240	A 442, B 240	A
PRA 1804	A 407, B 240	A 397, B 240	A 407, B 240	A 544, B 240	A 515, B 240	A

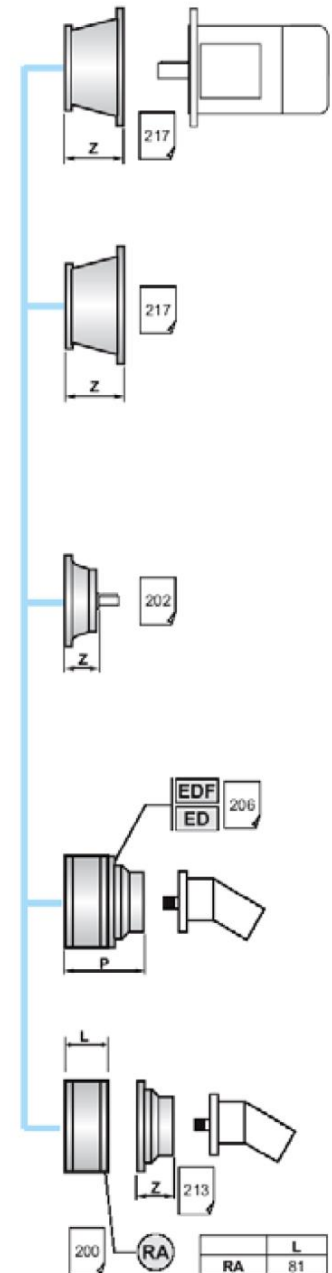

The data specified into this catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Intermot reserves the right to implement modification without notice. 32