


PR 3500

Technical data

PR 3501			PR 3502			PR 3503			PR 3504			PRA 3502			PRA 3503			PRA 3504		
n ₁ max 1500 RPM			n ₁ max 2000 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2000 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM		
Pt(kW) 54			Pt(kW) 34			Pt(kW) 23			Pt(kW) 17			Pt(kW) 34			Pt(kW) 23			Pt(kW) 17		
i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm
4.00	3750	7500	14.2	3750	7500	53.7	3750	7500	191.0	3750	7500	12.3	3750	7500	43.7	3750	7500	185.6	3750	7500
4.71	3196	6392	17.1	3750	7500	58.7	3750	7500	208.6	3750	7500	14.5	3196	6392	52.7	3750	7500	202.7	3750	7500
			20.2	3196	6392	64.8	3750	7500	230.3	3750	7500	18.7	3750	7500	66.4	3750	7500	223.7	3750	7500
			22.4	3750	7500	70.7	3750	7500	251.4	3750	7500	22.0	3196	6392	80.0	3750	7500	244.3	3750	7500
			26.4	3196	6392	83.2	3196	6392	277.6	3750	7500				94.1	3196	6392	292.5	3750	7500
			31.8	3196	6392	88.6	3750	7500	303.1	3750	7500				123.0	3196	6392	319.4	3750	7500
			40.8	3196	6392	99.6	3196	6392	328.5	3750	7500							352.6	3750	7500
						108.7	3196	6392	362.7	3750	7500							385.0	3750	7500
						121.0	3196	6392	379.6	3750	7500							414.8	3196	6392
						136.2	3196	6392	437.1	3750	7500							452.9	3196	6392
						158.1	3196	6392	496.0	3750	7500							542.0	3196	6392
						164.1	3196	6392	583.5	3196	6392							591.8	3196	6392
						191.1	3196	6392	677.7	3196	6392							658.8	3196	6392
						230.3	3196	6392	703.4	3196	6392							741.3	3196	6392
									762.5	3196	6392							860.9	3196	6392
									816.8	3196	6392							1037.7	3196	6392
									987.0	3196	6392							1253.8	3196	6392
									1067.3	3196	6392									
									1289.7	3196	6392									


MODELLO - MODEL		PR 3501			PR 3502			PR 3503			PR 3504			PRA 3502			PRA 3503			PRA 3504		
TIPO USCITA - OUTPUT TYPE		M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P
PESO - WEIGHT Kg.		193	156	-	243	207	-	259	223	-	267	231	-	285	248	-	342	305	-	299	263	-
Olio - Oil Lt.	Orizzontale - Horizontal	4.0	3.3	-	5.5	4.7	-	6.0	5.2	-	6.3	5.5	-	6.7	5.8	-	10.2	9.4	-	8.2	7.0	-
	Verticale - Vertical	8.0	6.6	-	11.0	9.4	-	12.0	10.4	-	12.6	11.0	-	13.4	11.6	-	20.4	18.8	-	16.4	14.0	-

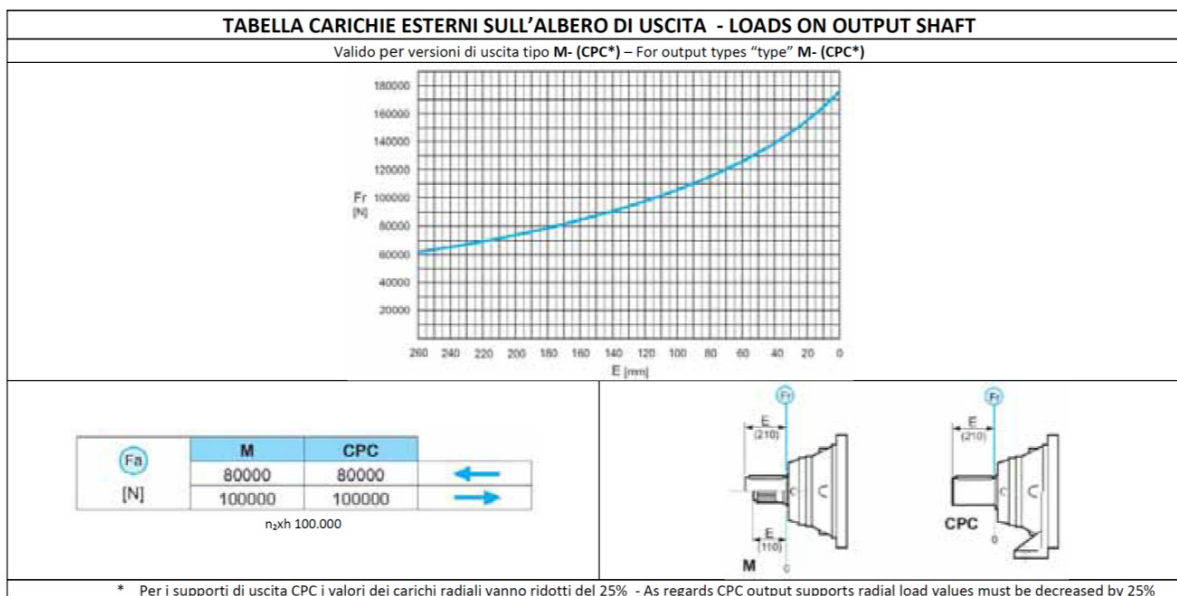


The data specified into this catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Intermot reserves the right to implement modification without notice.

PR 3500


Dimensional drawings

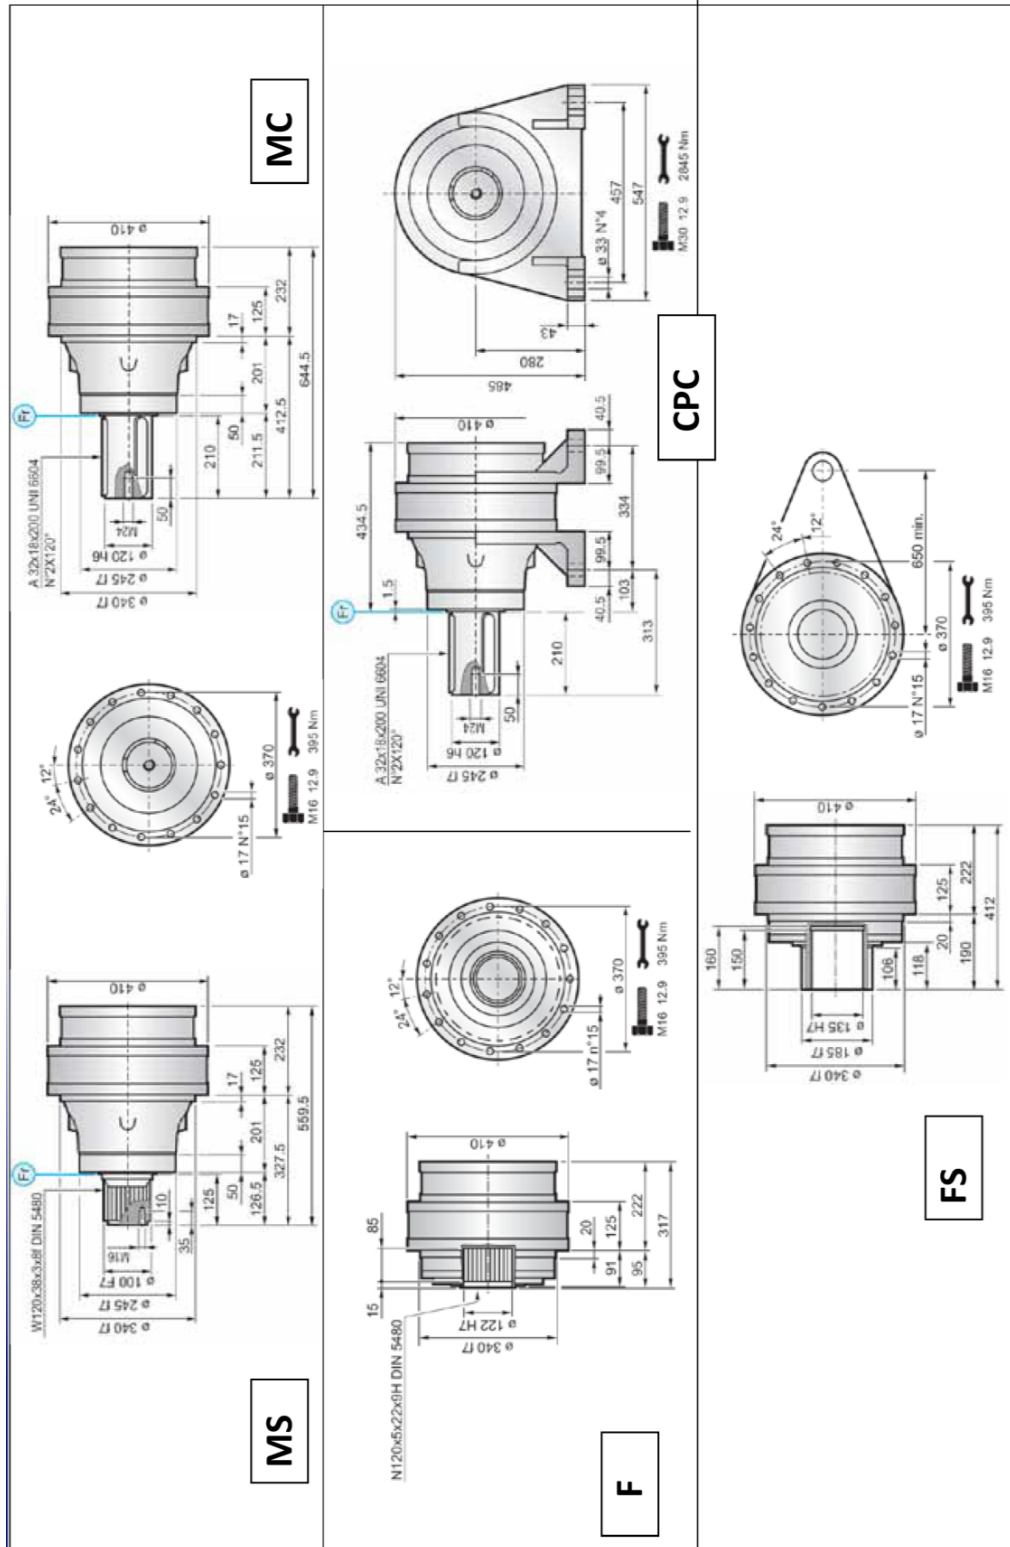


PR 3500 Special versions

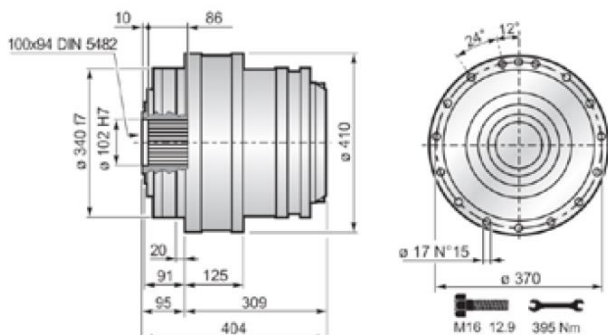

F2

	VERSIONE USCITA – OUTPUT TYPE				ENTRATA TIPO INPUT TYPE
	F – F2	MC – MS	CPC	FS	
PR 3501	A 227	A 232	A 435	A 227	D
PR 3502	A 314	A 319	A 522	A 314	B
PR 3503	A 386	A 391	A 593	A 386	A
PR 3504	A 447	A 452	A 654	A 447	A

	VERSIONE USCITA – OUTPUT TYPE				ENTRATA TIPO INPUT TYPE
	F – F2	MC – MS	CPC	FS	
PRA 3502	A 287, B 315	A 297, B 315	A 500, B 315	A 287, B 315	B
PRA 3503	A 444, B 240	A 454, B 240	A 657, B 240	A 444, B 240	A
PRA 3504	A 482, B 240	A 492, B 240	A 695, B 240	A 482, B 240	A

