

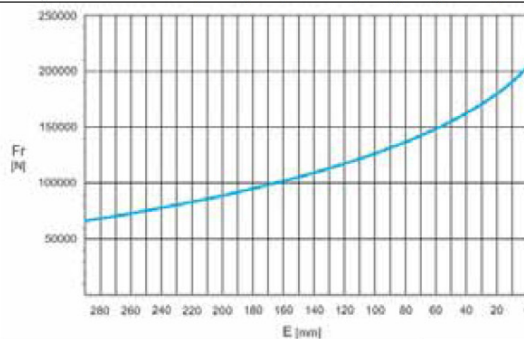
PR 6500

Technical data

[illegible]


MODELLO - MODEL		PR 6501			PR 6502			PR 6503			PR 6504			PRA 6503			PRA 6504		
TIPO USCITA - OUTPUT TYPE		M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P
PESO - WEIGHT Kg.		334	276	-	450	392	-	477	419	-	489	431	-	514	456	-	514	456	-
Olio - Oil Lt.	Orizzontale - Horizontal	7.2	6.2	-	8.5	7.5	-	9.7	8.7	-	10.1	9.1	-	14.2	13.2	-	11.7	10.7	-
	Verticale - Vertical	14.4	12.4	-	17.0	15.0	-	19.4	17.4	-	20.2	18.2	-	28.4	26.4	-	23.4	21.4	-

TABELLA CARICHE ESTERNI SULL'ALBERO DI USCITA - LOADS ON OUTPUT SHAFT

Valido per versioni di uscita tipo **M-** (CPC*) – For output types “type” **M-** (CPC*)

<div><div>Fa</div><div>[N]</div></div>	M	CPC	
	50000	50000	←
	100000	100000	→

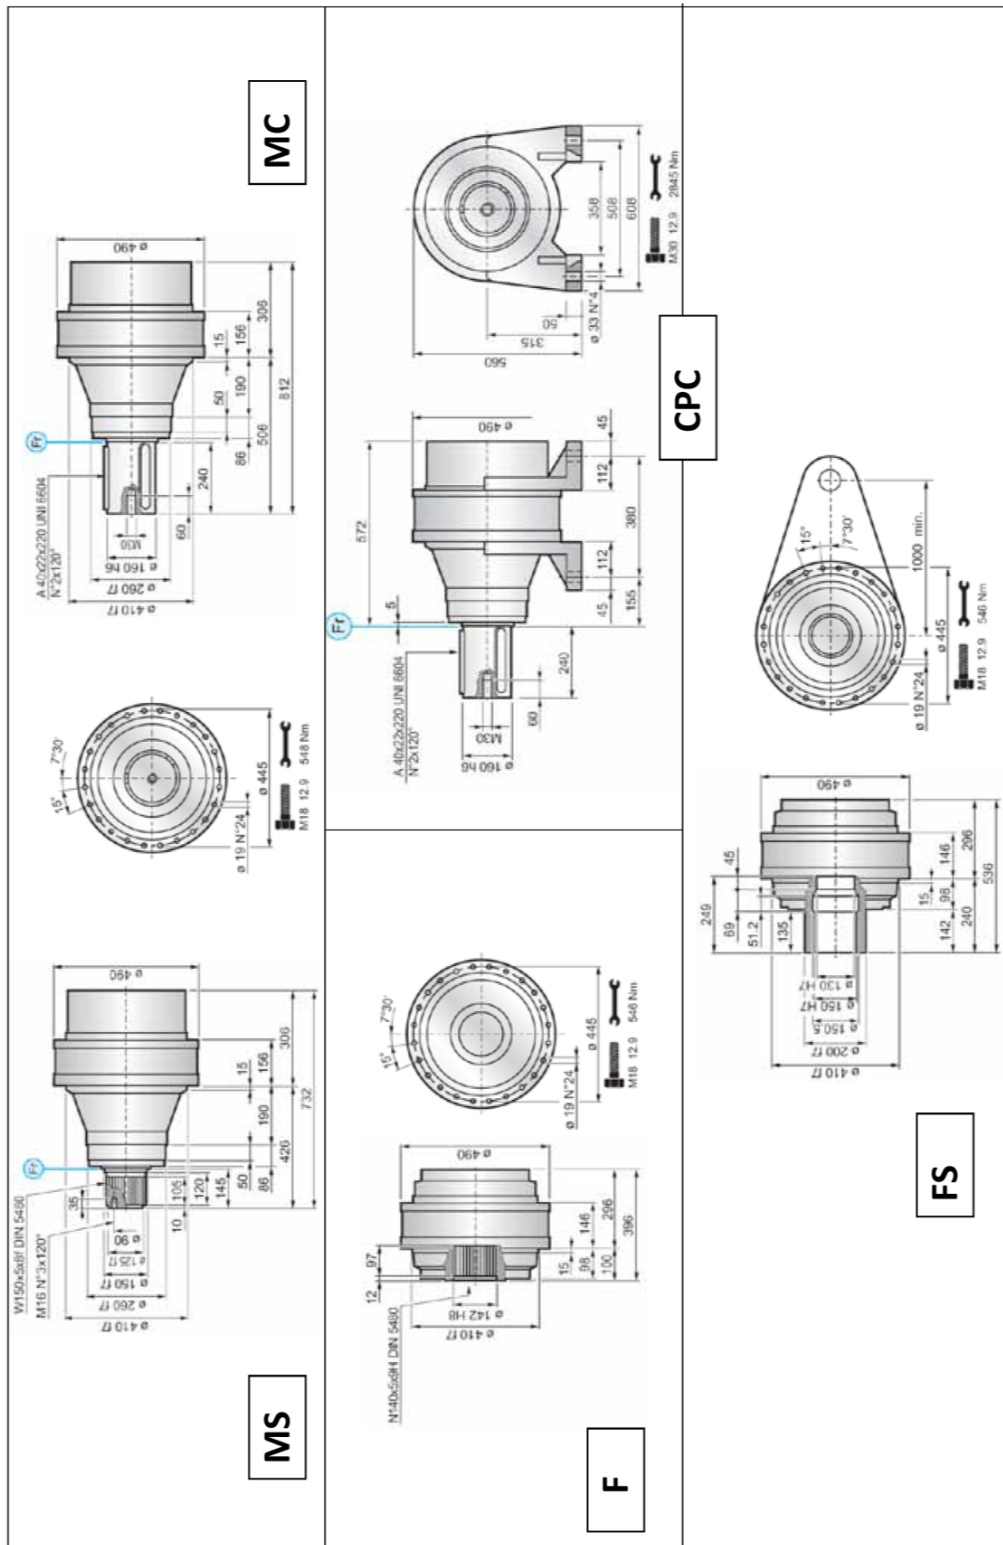
n-xh 100,000




* Per i supporti di uscita CPC i valori dei carichi radiali vanno ridotti del 25% - As regards CPC output supports radial load values must be decreased by 25%


The data specified into this catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Intermot reserves the right to implement modification without notice.

PR 6500
Dimensional drawings



PR 6500 Special versions

	VERSIONE USCITA – OUTPUT TYPE				ENTRATA TIPO INPUT TYPE
	F	MC – MS	CPC	FS	
PR 6501	A 296	A 306	A 572	A 296	-
PR 6502	A 478	A 488	A 754	A 478	C
PR 6503	A 572	A 582	A 848	A 572	B
PR 6504	A 632	A 642	A 908	A 632	A

	VERSIONE USCITA – OUTPUT TYPE				ENTRATA TIPO INPUT TYPE
	F	MC – MS	CPC	FS	
PRA 6503	A 558 , B 315	A 568 , B 315	A 834 , B 315	A 558 , B 315	B
PRA 6504	A 660 , B 240	A 670 , B 240	A 936 , B 240	A 660 , B 240	A

