


GENERAL INFORMATION

INTERMOT produces RADIAL PISTON HYDRAULIC MOTORS since 1985: our yearly production is more than 13.000 units which we sell all over the world through our agents and authorized sellers. Our motor range varies from 20cc to 8500cc displacement and it is completed by two-speed motors and special motors created in cooperation with our clients for different applications such as : underwater, high & low speed and wheel motors and with the possibility to assemble valves, brakes or gear reductions. You can directly contact our Technical Department which will give you all the necessary support to find the right solutions to your problems.

INTERMOT is a flexible work reality and manages deliveries also within the same day of order; we produce motors exactly interchangeable with our competitors, always ready on stock which our clients particularly appreciate.

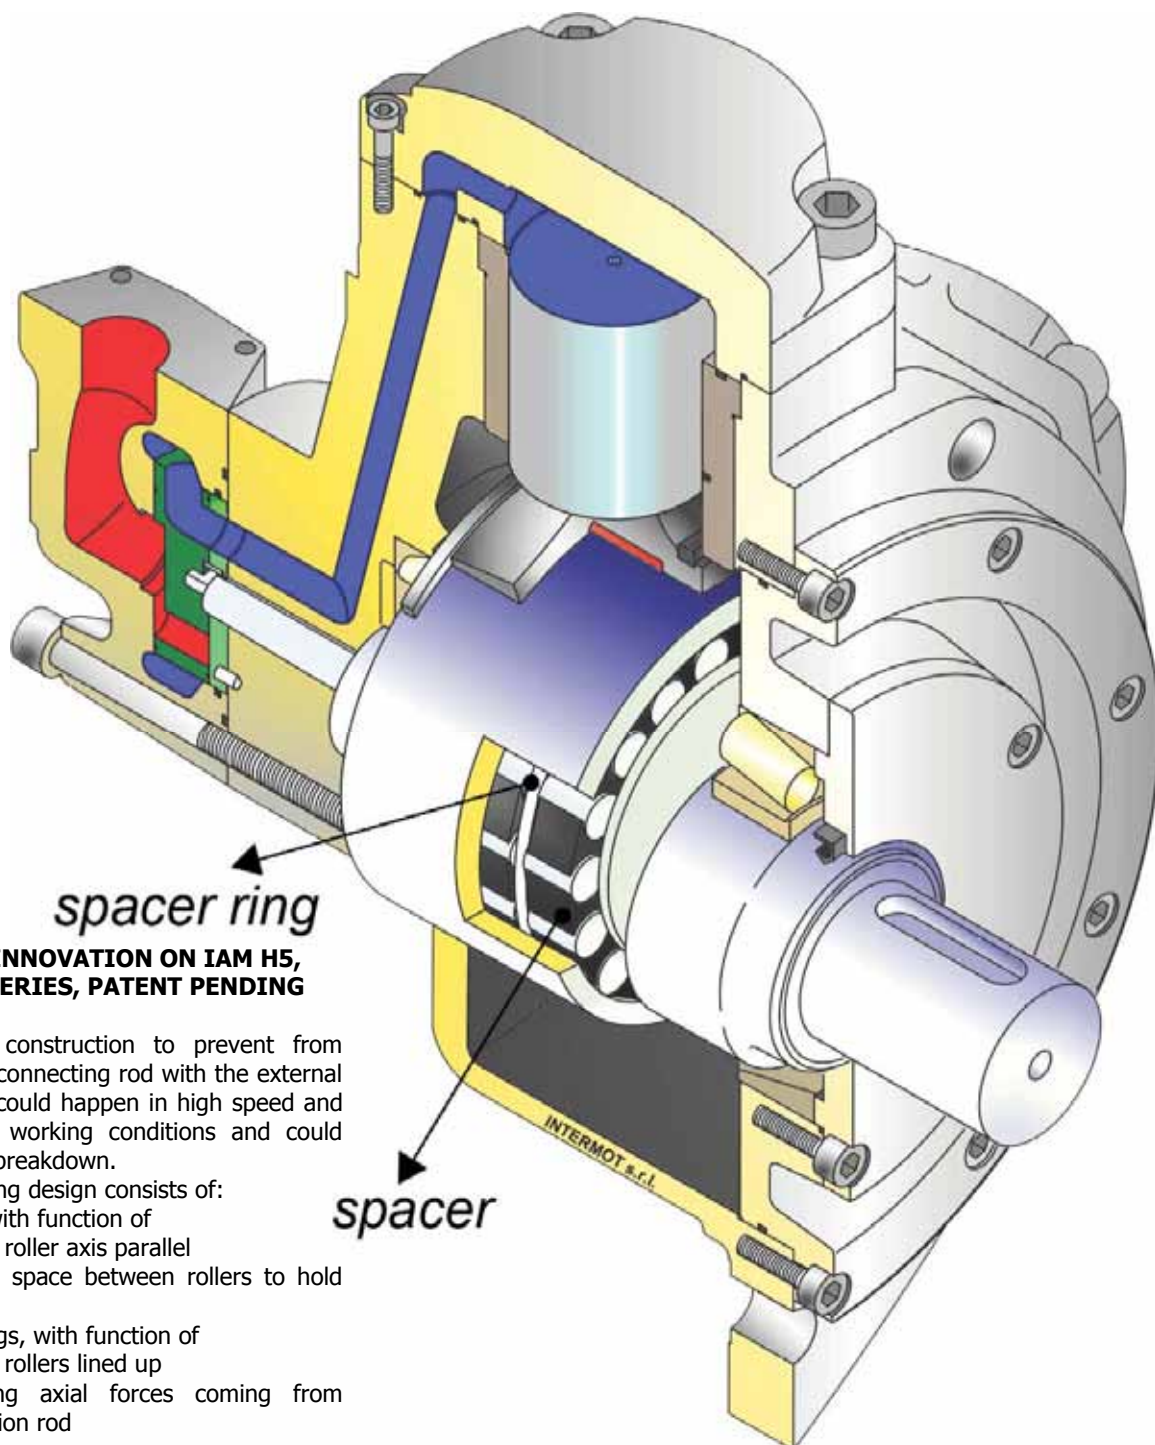


TECHNICAL INNOVATION ON IAM H5, H6 AND H7 SERIES, PATENT PENDING

New bearing construction to prevent from seizure of the connecting rod with the external bushing. This could happen in high speed and high pressure working conditions and could lead to motor breakdown.

The new bearing design consists of:

- spacers, with function of
 - keeping roller axis parallel
 - creating space between rollers to hold more oil
- spacer rings, with function of
 - keeping rollers lined up
 - absorbing axial forces coming from connection rod

ORDERING INSTRUCTIONS

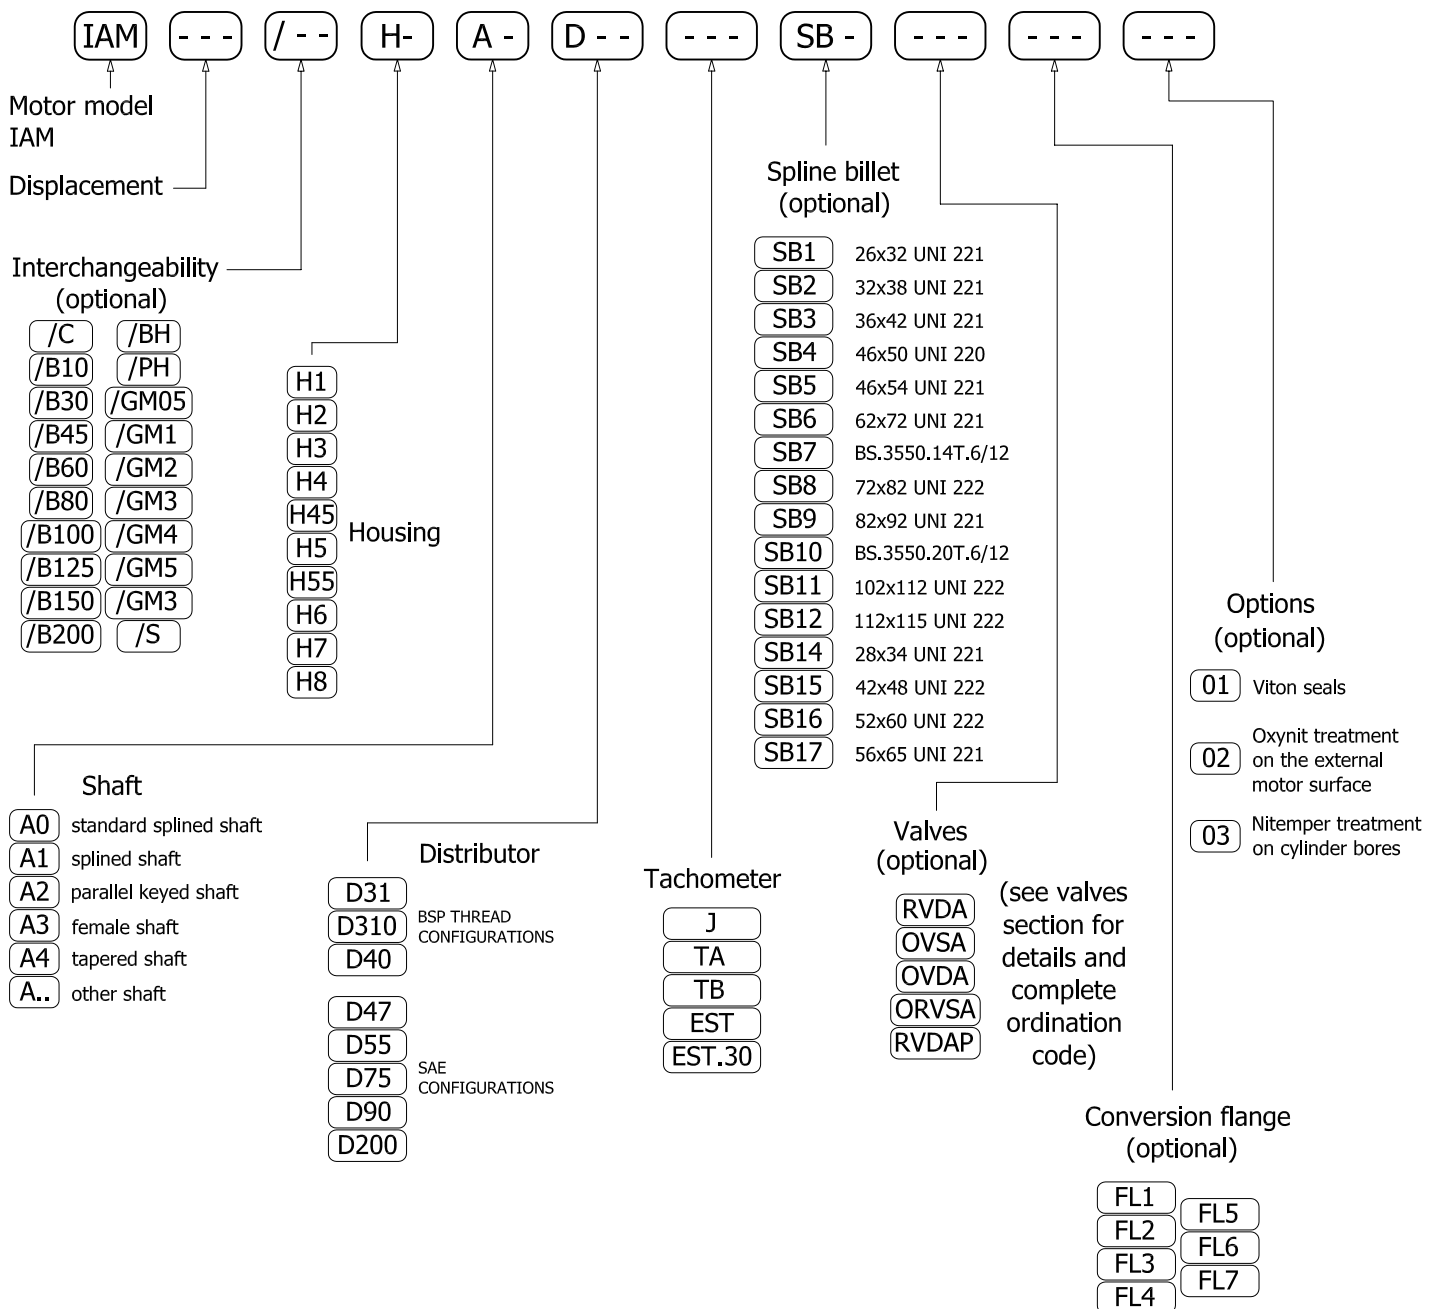

EXAMPLE: IAM.100/BH.H1.A0.D40.J.SB14
IAM.3000.H6.A2.D90
IAM.4300/C.H7.A0.D90.TB

For more details on available displacements or shaft options and accessories consult each section of the catalogue concerning IAM family products and accessories.

MOTOR TECHNICAL DATA

MODEL		N° of pistons	Displacement	Specific Torque	Pressure			Speed		Max Case Pressure	Max Power		Dry Weight	Inertia moment of rotating parts
					Max Cont.	Max Int.	Peak	Max Continuous	Peak					
			cc/rev	Nm/bar	bar	bar	bar	rpm	rpm					
IAM 80	H1	5	80	1.3	250	300	350	950	1050	6	54	40	26	18
IAM 100		5	100	1.6	250	300	350	950	1050	6	54	40	26	18
IAM 150		5	157	2.5	250	300	350	950	1050	6	54	40	26	18
IAM 175		5	176	2.8	250	300	350	800	900	6	54	40	26	18
IAM 195		5	195	3.1	250	300	350	800	900	6	54	40	26	18
IAM 200		5	207	3.3	250	300	350	750	850	6	54	40	26	18
IAM 250		5	257	4.1	250	300	350	750	850	6	54	40	26	18
IAM 300		5	307	4.9	250	300	350	750	850	6	54	40	26	18
IAM 200	H2	5	198	3.2	250	300	350	800	900	6	66	49	42	27
IAM 250		5	253	4.0	250	300	350	750	850	6	66	49	42	27
IAM 300		5	314	5.0	250	300	350	750	850	6	66	49	42	27
IAM 350		5	362	5.8	250	300	350	650	750	6	66	49	42	27
IAM 400		5	424	6.7	250	300	350	600	700	6	66	49	42	27
IAM 500		5	492	7.8	250	300	350	500	600	6	66	49	42	27
IAM 600		5	584	9.3	250	300	350	500	600	6	66	49	42	27
IAM 350	H3	5	349	5,6	250	300	350	630	700	6	91	68	68	214
IAM 400		5	397	6.3	250	300	350	600	680	6	91	68	68	214
IAM 450		5	452	7.2	250	300	350	600	680	6	91	68	68	214
IAM 500		5	491	7.8	250	300	350	600	680	6	91	68	68	214
IAM 600		5	594	9.4	250	300	350	550	630	6	91	68	68	214
IAM 650		5	660	10.5	250	300	350	500	580	6	91	68	68	214
IAM 700		5	707	11.2	250	300	350	450	500	6	91	68	68	214
IAM 800		5	791	12.6	250	300	350	400	450	6	91	68	68	214
IAM 700	H4	5	714	11.4	250	300	350	500	580	6	107	80	92	267
IAM 800		5	792	12.6	250	300	350	450	530	6	107	80	92	267
IAM 850		5	847	13.5	250	300	350	450	530	6	107	80	92	267
IAM 900		5	904	14.4	250	300	350	450	530	6	107	80	92	267
IAM 1000		5	992	15.8	250	300	350	330	400	6	107	80	92	267
IAM 1100		5	1116	17.8	250	300	350	330	400	6	107	80	92	267

MOTOR TECHNICAL DATA

MODEL		N° of pistons	Displacement	Specific Torque	Pressure			Speed		Max Case Pressure	Max Power		Dry Weight	Inertia moment of rotating parts
					Max Cont.	Max Int.	Peak	Max Continuous	Peak					
			cc/rev	Nm/bar	bar	bar	bar	rpm	rpm	bar	hp	kW	kg	kg cm²
IAM 1200	H4	5	1192	19.0	250	300	350	300	350	6	107	80	92	267
IAM 1250		5	1247	19.8	250	300	350	250	300	6	107	80	92	267
IAM 1400		5	1332	21.2	250	300	350	230	280	6	107	80	92	267
IAM 1100	H45	5	1183	18.8	250	300	350	350	400	6	161	120	118	380
IAM 1400		5	1376	21.9	250	300	350	300	350	6	161	120	118	380
IAM 1600		5	1648	26.2	250	300	350	275	325	6	161	120	118	380
IAM 1800		5	1815	28.9	250	300	350	250	300	6	161	120	118	380
IAM 1000	H5	5	1094	17.4	250	300	350	350	400	6	161	120	173	697
IAM 1200		5	1231	19.6	250	300	350	300	350	6	161	120	173	697
IAM 1400		5	1376	21.9	250	300	350	300	350	6	161	120	173	697
IAM 1500		5	1528	24.3	250	300	350	300	350	6	161	120	173	697
IAM 1600		5	1648	26.2	250	300	350	300	340	6	161	120	173	697
IAM 1800		5	1815	28.9	250	300	350	250	300	6	161	120	173	697
IAM 2000		5	2035	32.4	250	300	350	230	260	6	161	120	173	697
IAM 2200		5	2220	35.3	250	300	350	220	240	6	161	120	173	697
IAM 2200	H55	5	2126	33.8	250	300	350	240	280	6	228	170	173	837
IAM 2500		5	2525	40.2	250	300	350	240	280	6	228	170	173	837
IAM 2800		5	2807	44.7	250	300	350	240	280	6	228	170	173	837
IAM 3000		5	3028	48.2	250	300	350	230	270	6	228	170	173	837
IAM 2200	H6	5	2206	35.1	250	300	350	220	260	6	228	170	308	1745
IAM 2500		5	2525	40.2	250	300	350	220	260	6	228	170	308	1745
IAM 2800		5	2807	44.7	250	300	350	220	260	6	228	170	308	1745
IAM 3000		5	2983	47.5	250	300	350	210	250	6	228	170	308	1745
IAM 3200		5	3289	52.3	250	300	350	200	240	6	228	170	308	1745
IAM 3500		5	3479	55.4	250	300	350	200	240	6	228	170	308	1745
IAM 3900	H7	7	3907	62.2	250	300	350	160	200	6	241	180	405	4064
IAM 4300		7	4343	69.1	250	300	350	150	190	6	241	180	405	4064
IAM 4600		7	4616	73.5	250	300	350	140	190	6	241	180	405	4064

MOTOR TECHNICAL DATA

MODEL		N° of pistons	Displacement	Specific Torque	Pressure			Speed		Max Case Pressure	Max Power		Dry Weight	Inertia moment of rotating parts
					Max Cont.	Max Int.	Peak	Max Continuous	Peak					
			cc/rev	Nm/bar	bar	bar	bar	rpm	rpm	bar	hp	kW	kg	Kg cm²
IAM 5000	H7	7	5088	81.0	250	300	350	140	180	6	241	180	405	4064
IAM 5400		7	5384	85.7	250	300	350	130	170	6	241	180	405	4064
IAM 6000	H8	10	5966	95.0	250	290	320	120	140	6	255	190	590	5380
IAM 6500		10	6581	104.7	250	290	320	120	140	6	255	190	590	5380
IAM 6800		10	6962	110.8	250	290	320	120	140	6	255	190	590	5380
IAM 7600		10	7620	121.3	190	230	280	90	100	6	241	180	590	5380
IAM 8000		10	8062	128.3	180	220	270	80	90	6	241	180	590	5380

HYDRAULIC FLUIDS RECOMMENDATIONS

HYDRAULIC FLUIDS

We recommend the use of hydraulic oils with anti-wear additives (ISO HM or HV) and minimum viscosity index of 95. Once normal working temperature is reached, oil viscosity must be at least 12 cSt, preferably in the range from 20 to 60 cSt.

Hydraulic oils meeting Denison MF-O, Vickers M-2952-S I - 286-S performance requirements and DIN 51524 specifications, are preferred.

Mineral hydraulic oils are divided into four main types, designated by the International Standards Organisation (ISO) as HH, HL, HM and HV. We advise to use only products with HM or HV specifications.

HM type

These are the most widely employed hydraulic oils. They include small quantities of anti-wear additives to provide significant improvement in wear reduction. "Superior" quality HM type oils can be used for all equipment, with the added assurance that they will be suitable for the highest temperature.

HV type

HV hydraulic oils show minimal change in viscosity with temperature variations.

OIL VISCOSITY RECOMMENDATION

Room temperature HM type ISO-VG

- -20°C / 0°C BP ENERGOL HLP - HM 22
- -15°C / +5°C BP ENERGOL HLP - HM 32
- -8°C / +15°C BP BNERGOL HLP - HM 46
- 0°C / +22°C BP ENERGOL HLP - HM 68
- +8°C / +30°C BP ENERGOL HLP - HM100
- -20°C / +5°C BP BARTRAN HV 32
- -15°C / +22°C BP BARTRAN HV 46
- 0°C / +30°C BP BARTRAN HV 68

Our motors have been designed to work also with:

- oils type ATF (Automatic Transmission Fluid)
- oils with viscosity SAE 10W - 20 -30
- multigrade motor oils SAE 10 W/40 or 15 W/40
- universal oils

During cold start-up, avoid high-speed operation until the system is warmed up to provide adequate lubrication.

Continuous working temperature must not exceed 70°C.

When the working conditions cause the oil viscosity decrease under the minimum recommended value, to guarantee a sufficient motor lubrication it is necessary an adequate motor flushing (see flushing page for more details).

FIRE RESISTANT OIL LIMITATIONS

	Max cont. pressure	Max int. pressure	Max speed
HFA, 5-95% oil-water	103	138	50%
HFB, 60-40% oil-water	138	172	100%
HFC, water-glycol	103	138	50%
HFD, ester phosphate	250	293	100%

FILTRATION

Hydraulic systems oil must always be filtered.

The choice of filtration grade derives from needs of service life and money spent. In order to obtain stated service life it is important to follow our recommendations concerning filtration grade.

When choosing the filter it is important to consider the amount of dirt particles that filter can absorb and still operate satisfactorily. For that reason we recommend filters showing when you need to substitute filtering cartridge.

- 25 µm filtration required in most applications
- 10 µm filtration in closed circuit applications

OXIDATION

Hydraulic oil oxidizes with time of use and temperature. Oxidation causes changes in colour and smell, acidity increase or sludge formation in the tank. Oxidation rate increases rapidly at surface temperatures above 60°C, in these situations oil should be checked more often.

The oxidation process increases the acidity of the fluid; the acidity is stated in terms of the "neutralization number". Oxidation is usually slow at the beginning and then it increases rapidly.

A sharp increase (by a factor of 2 to 3) in neutralization number between inspections shows that oil has oxidized too much and should be replaced immediately.

WATER CONTENT

Oil contamination by water can be detected by sampling from the bottom of the tank. Most hydraulic oils repel the water, which then collects at the bottom of the tank. This water must be drained off at regular intervals. Certain types of transmission oils and engine oils emulsify the water; this can be detected by coatings on filter cartridges or a change in the colour of the oil. In such cases, obtain your oil supplier advice.

DEGREE OF CONTAMINATION

Heavy contamination of the oil causes wear rising in hydraulic system components. Contamination causes must be immediately investigated and remedied.

ANALYSIS

It is recommended oil being analyzed every 6 months. The analysis should cover viscosity, oxidation, water content, additives and contamination. Most oil suppliers are equipped to analyze oil state and to recommend appropriate action. Oil must be immediately replaced if the analysis shows that it is exhausted.

INSTRUCTIONS AND ADVICES

INSTALLATION

Hoses and piping must be clean and free from contamination. No other special requirements are necessary.

- Motor can be mounted in any position
- In run-away conditions you must use counterbalance valves
- Consult factory for intermittent applications

Splined adaptors (sleeves) are available upon request.

INSTALLATION CIRCUIT

The choice of open or closed loop circuit will be determined by the application.

Open loop circuits are cheaper and simpler to install.

Closed loop circuit is a superior circuit and usually takes up less space. It also offers better control features.

START UP

Motor case and pistons must be completely filled with oil before starting.

Do not load motor to maximum working pressure. Increase load gradually at start-up.

CASE DRAIN – CASE PRESSURE

Connect the case drain directly to tank.

The case drain port on the motor must be located on the highest point of the installation to ensure that the motor will always be full of oil. The case drain pressure must not exceed 6 bar continuous pressure.

IMPORTANT

When the motor is installed vertically with shaft pointing upwards, consult our Technical Department. If the motor is connected to high inertial loads, the hydraulic system must be designed to prevent peaks of pressure and cavitation.

TEMPERATURE

Maximum oil temperature must not exceed 70°C. Heat exchangers must be used with higher temperatures.

VISCOSITY

The motor works satisfactory in a range of 3°E to 10°E oil viscosity. Best performance is obtained at the highest viscosity.

BACK PRESSURE

Don't exceed 70 bar back pressure.

HIGH PEAKS APPLICATIONS

In case of high pressure peaks applications, a Nitemper treatment on cylinders is suggested to increase wear and tear resistance.

CONTINUOUS HIGH SPEED DUTY

In case of continuous high speed duty, it is suggested to mount a central reinforced bearing on motor shaft, please contact our Technical Department.

MINIMUM SPEED

Standard minimum speed is about 0.5 to 3 rpm (depending on motor displacement). If you need less speed, it is possible to modify some parts of the distributor.

FLUSHING

In the need of Flushing, a 2nd drain hole is available upon request. When flushing is not available, it is possible to create an inner motor drain to help cooling.

COOLING FLOW

If the motor operates in the Intermittent Power zone, it may require a cooling flow of 20 l/min (5 gpm) to keep a drain flow viscosity of 40 cSt minimum.

FOR MORE DETAILS ON THE ABOVE MENTIONED ARGUMENTS AND FOR ANY FURTHER INFORMATION PLEASE CONTACT OUR TECHNICAL DEPARTMENT.

BEARINGS

Bearings lifetime depends on the type of bearing, on motor speed and on working loads.

Lifetime is measured by L_{10} which is called "theoretic lifetime". It represents the number of cycles that 90% of identical bearings can effort at the same load without showing wear and tear. It is calculated by the following equation:

$$L_{10} = \left(\frac{C}{P} \right)^p$$

where: C = theoretical dynamic coefficient (depending on the bearing size)

P = radial load

p = exponent (p=3 for ball bearings, p=10/3 for roller bearings)

When you work at constant speed, you can calculate the lifetime in hours with the following equation:

$$L_{10h} = \frac{10^6 \cdot L_{10}}{60 \cdot \text{rpm}} = \frac{10^6}{60 \cdot \text{rpm}} \left(\frac{C}{P} \right)^p [\text{h}]$$

When you don't have only radial or axial loads, you have to calculate an equivalent load:

$$P = X \cdot F_R + Y \cdot F_A$$

Where

F_R = radial load,

X = radial coefficient,

F_A = axial load,

Y = axial coefficient

While F_R and F_A come from working conditions (i.e. torque),

X and Y depend on the type of bearing and on the ratio $\frac{F_A}{F_R}$.

To help you in the expected lifetime calculation, Intermot provides you with an EXCEL calculation sheet. With this instrument you can easily calculate lifetime: you only need to choose the motor model, put speed, pressure and loads.

For further information or to have the calculation sheet, please contact our Technical Department.

SHAFT SEAL FEATURES

Type: BABSL
Form: AS DIN 3760
Material: SIMRIT® 72 NBR 902
SIMRIT® 75 FKM 595

1. Features

SIMMERRING® radial shaft seal with rubber covered O.D., short, flexibility suspended, spring loaded sealing lip and additional dust lip: see Part B/ SIMMERRING®, sections 1.1 and 2.

2. Material

Sealing lip and O.D.:

- Acrylonitrile-butadiene rubber with 72 Shore

A hardness (designation: SIMRIT® 72 NBR 902)

- Fluoro rubber with 75 Shore A hardness (designation: SIMRIT® 75 FKM 595)

Metal insert:

- Plain steel DIN 1624

Spring:

- Spring steel DIN 17223

3. Application

For sealing pressurised media without additional backup ring, e. g. for rotational pressure sealing in hydraulic pumps, hydraulic motors, hydrodynamic clutches. Rubber covered O.D. assures sealing in the housing bore even in case of considerable surface roughness, thermal expansion or split housing.

Particularly suitable for sealing low viscosity and gaseous media.

Where high thermal stability and chemical resistance are required, SIMRIT® 75 FKM 595 material should be used. Additional dust lip to avoid the entry of light and medium dust and dirt.

4. Operating conditions

See Part B/ SIMMERRING®, sections 2. 4.

Media: mineral oils, synthetic oils

Temperature: -40°C to +100°C (SIMRIT® 72 NBR 902)

-40°C to +160°C (SIMRIT® 75 FKM 595)

Surface speed: up to 5 m/s

Working pressure: see diagram 1

Maximum permitted values, depending on other operating conditions.

5. Housing and Machining Criteria

See Part B/ SIMMERRING®, sections 2.

Shaft:	Tolerance:	ISO h11
	Concentricity:	IT 8
	Roughness:	Ra=0.2-0.8 µm
		Rz=1-4 µm Rmax=6 µm
	Hardness:	45-60 HRc
	Roughness:	non oriented;
		preferably by plunge grinding
Housing:	Tolerance:	ISO H8
	Roughness:	Rmax<25 µm

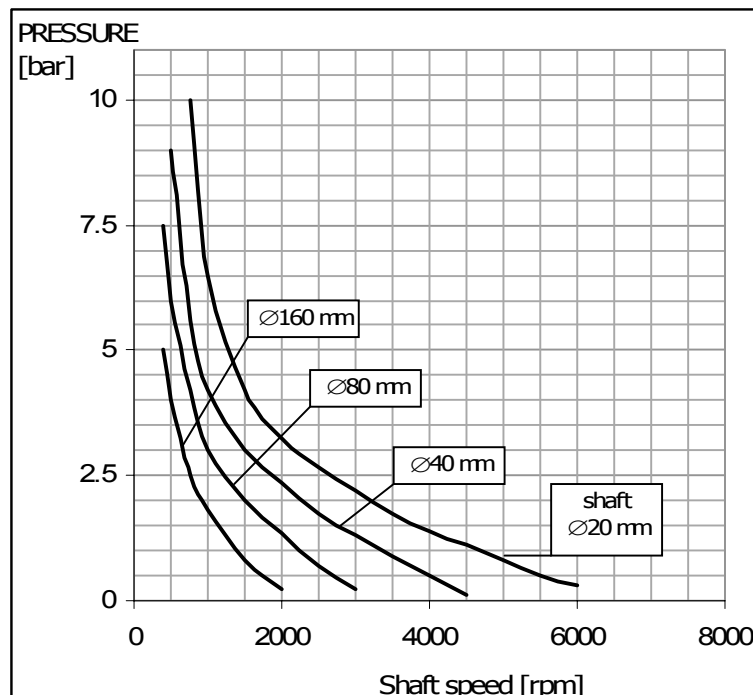


Diagram 1: Pressure Loading Limits

FLUSHING

FLUSHING FLOW

Cooling flow is necessary to assure the minimum oil viscosity. The following table shows the flushing flow approximate values that are suggested for IAM motors. In all the cases, the flushing flow must be adequate to assure the minimum oil viscosity (see page 7): therefore the flushing flow will depend by the motor displacement, working conditions and oil type, and must be set making some oil drain temperature monitoring.

Motor	Flushing flow [l/min]
IAM H1 80, 100	5
IAM H1 150, 175, 195, 200, 250, 300	6
IAM H2 200, 250, 300	
IAM H2 350, 400, 500	8
IAM H3 350, 400, 450, 500	
IAM H2 600	
IAM H3 600, 650, 700, 800	10
IAM H4 700, 800, 850, 900, 1000, 1100	
1200, 1250, 1400	
IAM H5 1000, 1200, 1400, 1600, 1800, 2000	
IAM H5 2200	15
IAM H6 2500, 2800, 3000, 3200, 3500	
IAM H7 3900, 4300, 4600, 5000, 5400	20
IAM H8 6500, 6800, 7600, 8000, 8500	

FLUSHING IN PERFORMANCE DIAGRAMS

Each performance diagram shows working conditions where flushing is suggested (areas numbered from 4 to 6 in each performance diagram).

Area 1: Continuous operation

Area 2: Intermittent operation for period 3-5 minute every 10-15 minute

Area 3: Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

Area 4: Continuous operation with flushing

Area 5: Intermittent operation for period 3-5 minute every 10-15 minute with flushing

Area 6: Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

HIGH VOLUMETRIC EFFICIENCY MOTORS

On radial piston hydraulic motors with high volumetric efficiency, and therefore Intermot IAM series, there can be a phenomenon of oil-overheating in the body motor.

Oil drawing from the piston and from the distributor goes into body motor. When this oil quantity is very scanty, it means there's a good volumetric efficiency. In some cases this is positive, like for winch on crane truck or trawl winch, because high volumetric efficiency avoids motor rotation even under external stress.

This scanty quantity of oil is not a problem because the motor works at high pressure only for a short period of time.

In other cases, this high efficiency can cause problems on the motor because oil exchange is missing.

In fixed applications, for example, where the motor is running constantly for 8 or more hours a day (like injection machines for plastic materials, press, bending machines, etc.) high volumetric efficiency can create temperature increasing in motor body.


In this case temperature increasing is to be avoided with the use of flushing.

Flushing consists in carrying fresh oil (taken from hydraulic circuit) in the body motor.


Oil is usually taken from return line to avoid any loss of efficiency.

In this way, all internal parts of the motor are protected with this lubrication and cooled with fresh oil, so that total efficiency is optimised.

FLUSHING CIRCUIT (ONE DIRECTION WORKING)

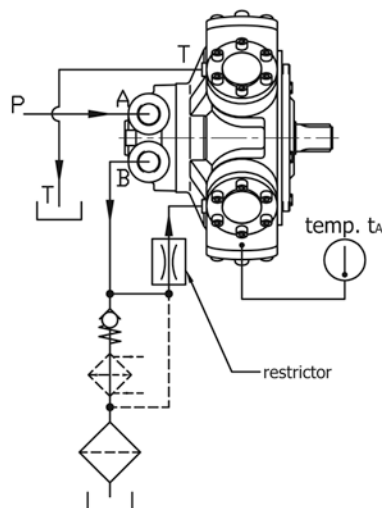


FLUSHING CIRCUIT (BIDIRECTIONAL WORKING)

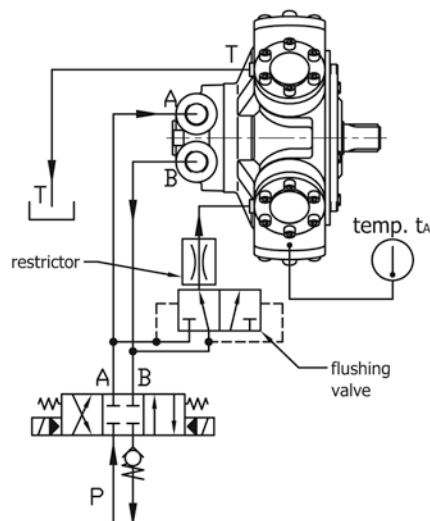


For further information please contact Intermot technical department

Motor flushing circuit example for unidirectional working

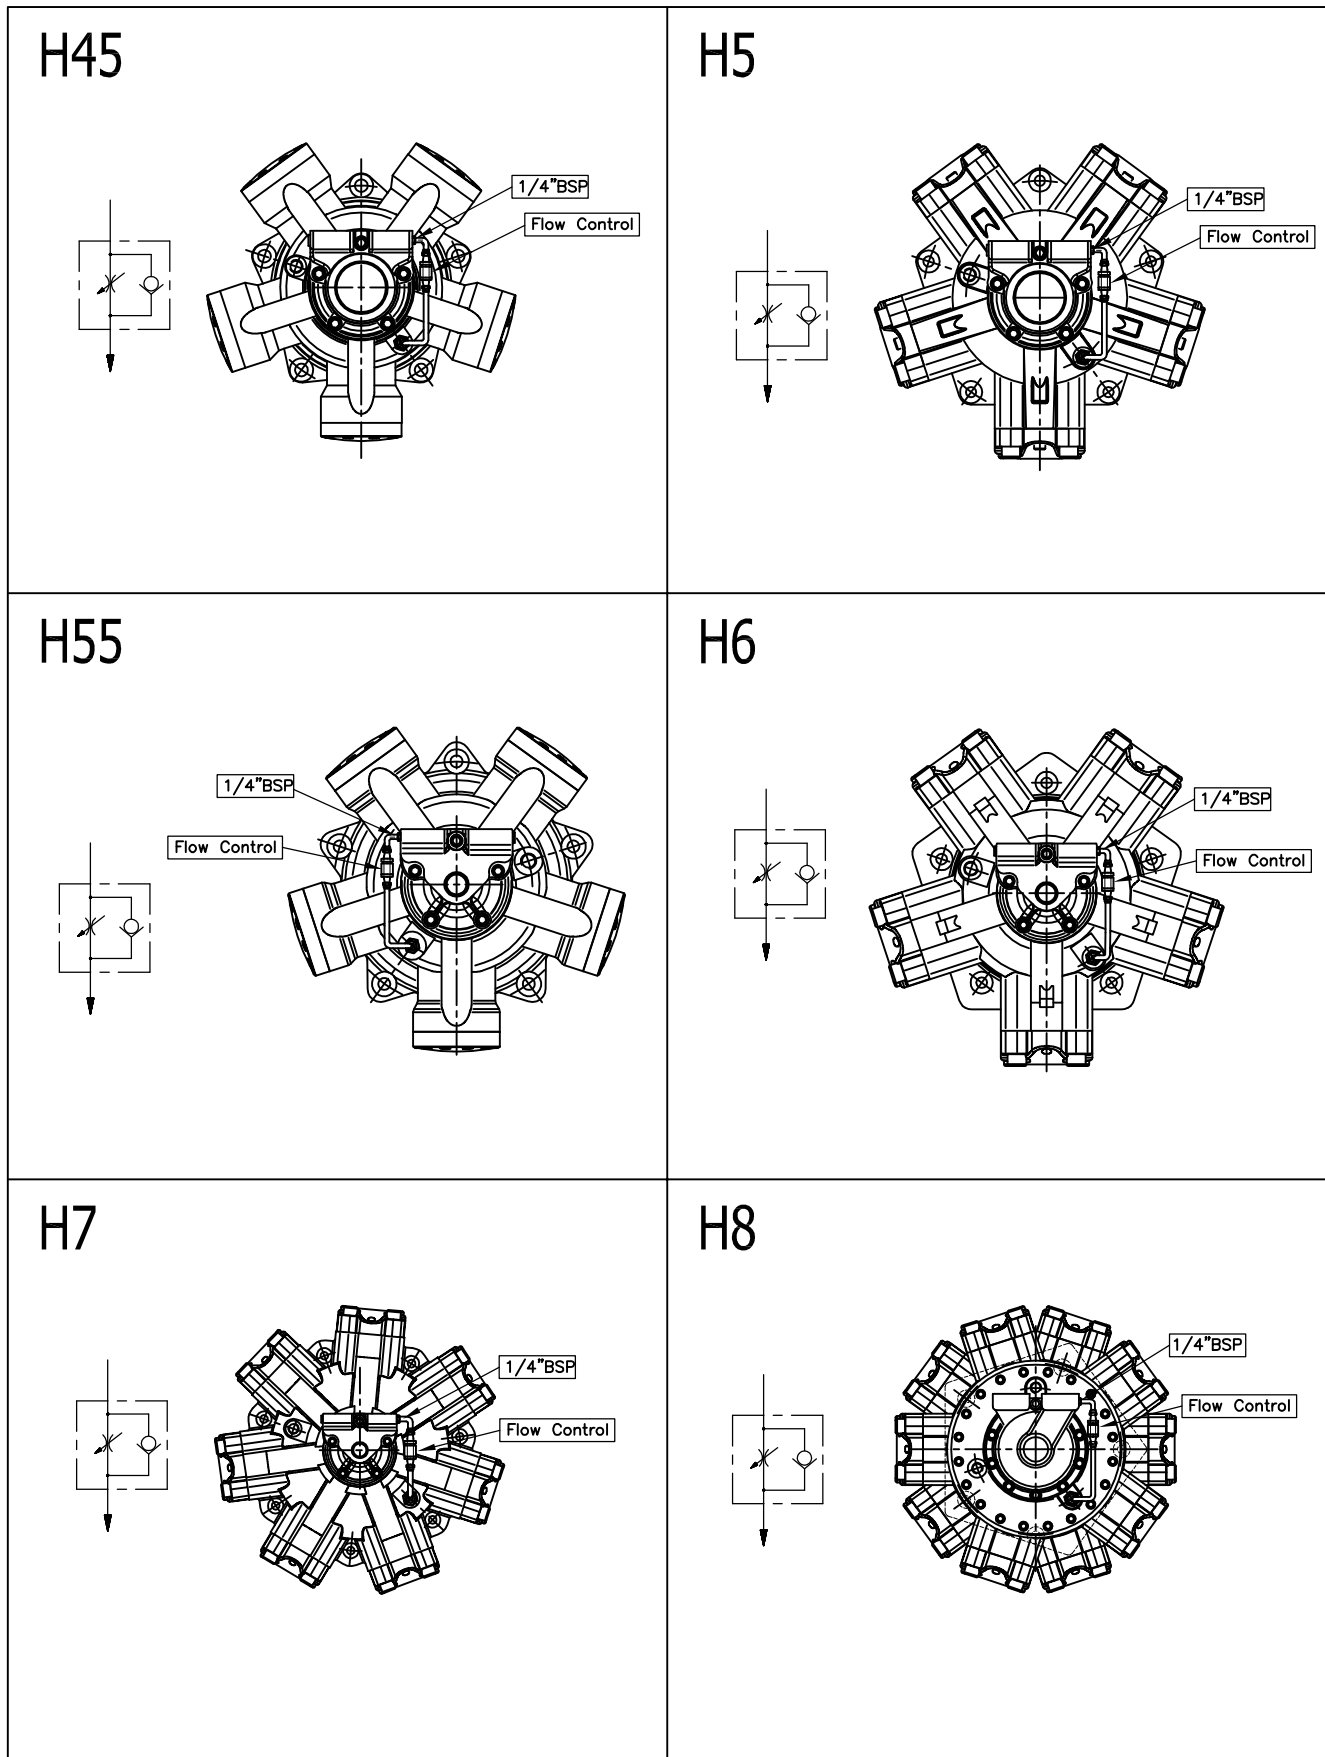

DRAIN RECOMMENDATIONS

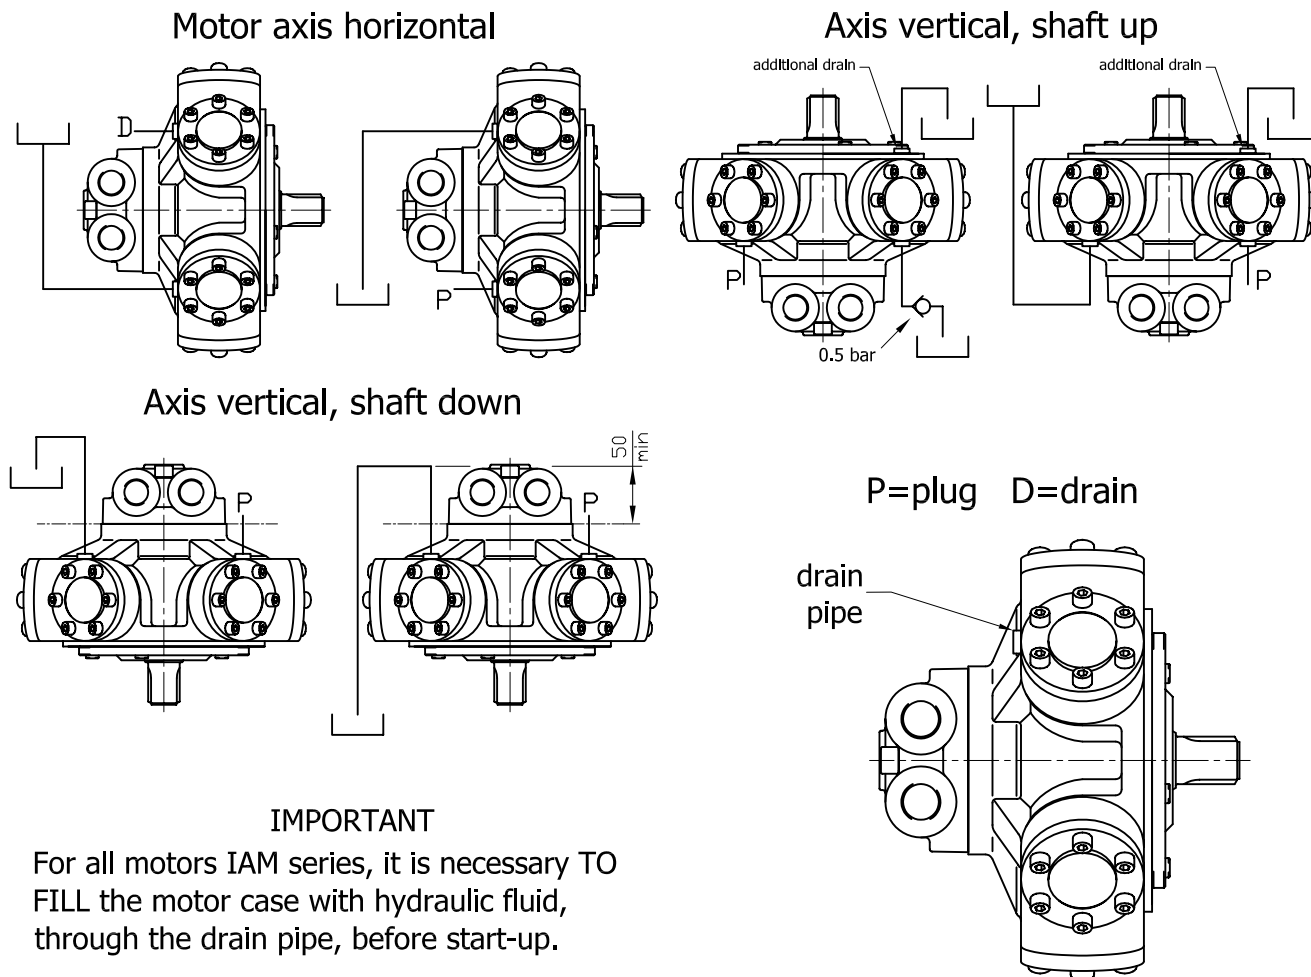

DISTRIBUTORS PRESSURE – FLOW

		D31/D310 (IAM H1, H2, H3, H4)	D40/D47 (IAM H1, H2, H3, H4, H45)	D55 (IAM H5, H45)	D75 (IAM H5, H45, H55)	D90 (IAM H55, H6, IAMH7)	D200 (IAM H8)
Pressure bar	Continuous	250	250	250	250	250	250
	Max	500	500	400	500	500	500
Flow L/min	Continuous	200	200	300	500	600	1000
	Max	400	400	600	1000	1200	2000

FORMULAS

- TORQUE (1) $\text{Torque} = (\text{specific torque}) \cdot (\text{pressure})$
- TORQUE (2) $\text{Torque [Nm]} = \frac{\text{displacement [cc/rev]} \cdot \text{pressure [bar]}}{62.8}$
- POWER (1) $\text{Power [kW]} = \frac{\text{Torque [Nm]} \cdot \text{speed [rpm]}}{9549}$
- POWER (2) $\text{Power [CV]} = \frac{\text{Torque [Nm]} \cdot \text{speed [rpm]}}{7023}$
- SPEED $\text{speed [rpm]} = \frac{\text{flow rate [l/min]} \cdot 1000}{\text{displacement [cc/rev]}}$
- REQUIRED MOTOR DISPLACEMENT $\text{displacement [cc/rev]} = \frac{\text{max required torque [Nm]} \cdot 62.8}{\text{max pressure [bar]}}$
- REQUIRED PUMP FLOW RATE $\text{flow [l/min]} = \frac{\text{displacement [cc/rev]} \cdot \text{max speed [rpm]}}{1000}$

CONVERSIONS

LENGTH	1 m	=	39.3701 in	PRESSURE	1 lbf	=	0.4536 kgf
		=	3.2808 ft			=	4.448 N
		=	1.0936 yd		1 bar	=	14.223 psi
		=	1000 mm			=	0.99 atm
	1 in	=	0.0833 ft			=	1.02 ata
		=	25.4 mm			=	100000 Pa
	1 ft	=	0.3048 m			=	100 kPa
		=	0.3333 yd			=	0.1 MPa
		=	12 in		1 psi	=	0.0703 bar
	1 yd	=	0.9144 m	FLOW	1 l/min	=	0.264 gpm
		=	3 ft			=	1000 cc/min
		=	36 in		1 gpm	=	3.785 l/min
	1 km	=	1000 m			=	3785 cc/min
		=	1093.6 yd		1 m ³ /s	=	60000 l/min
		=	0.6214 mile			=	15852 gpm
	1 mile	=	1.609 km	VOLUME	1 m ³	=	1000 l
		=	1760 yd		1 l	=	61,023 in ³
MASS	1 kg	=	2.2046 lb			=	0,264 galUS
	1 lb	=	0.4536 kg		1 in ³	=	0,01639 l
SPEED	1 m/s	=	3.6 km/h			=	0,004326 galUS
		=	2.237 mph	POWER	1 galUS	=	3,7879 l
		=	3.2808 ft/s			=	231,15 in ³
	1 km/h	=	0.2778 m/s		1 kW	=	1.341 HP
		=	0.6214 mph			=	1.3596 CV
		=	0.9113 ft/s		1 HP	=	0.7457 Kw
	1 mph	=	1.609 km/h			=	1.0139 CV
		=	0.447 m/s	TORQUE	1 Nm	=	0.102 kgm
		=	1.467 ft/s			=	0.7376 lbf ft
	1 ft/s	=	0.3048 m/s		1 kgm	=	9.806 Nm
		=	1.0973 km/h			=	7.2325 lbf ft
		=	0.6818 mph		1 lbf ft	=	0.1383 kgm
FORCE	1 N	=	0.102 kgf			=	1.3558 Nm
		=	0.2248 lbf				
	1 kgf	=	2.205 lbf				
		=	9.806 N				

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H1 MODEL

***IAM 80-100-150-175
195-200-250-300 H1***

***IAM 100-150-175-195
200-250/BH H1***

***IAM 100-150-175-195
200-250/GM05 H1***

***IAM 100-150-175-195
200-250/GM1 H1***

IAM 200-250-300/PH H1

INDEX

TECHNICAL DATA - - - - -	Pag.	16
IAM H1 80-100-150-175-195 - - - - -	"	17
IAM H1 200-250-300 - - - - -	"	18
IAM H1 100-150-175-195-200-250/GM05 - - - - -	"	19
IAM H1 100-150-175-195-200-250/BH - - - - -	"	20
IAM H1 100-150-175-195-200-250/GM1 - - - - -	"	21
IAM H1 200-250-300/PH - - - - -	"	22
ORDERING INSTRUCTIONS - - - - -	"	23
GRAPHIC PERFORMANCES H1 80-100-150-175 - - - - -	"	24
GRAPHIC PERFORMANCES H1 195-200-250-300 - - - - -	"	25

TECHNICAL DATA

H1

MODEL		IAM 80 H1	IAM 100 H1	IAM 150 H1	IAM 175 H1	IAM 195 H1	IAM 200 H1	IAM 250 H1	IAM 300 H1
Displacement	cc/rev	80	100	157	176	195	207	257	307
Specific Torque	Nm/bar	1.3	1.6	2.5	2.8	3.1	3.3	4.1	4.9
Max cont. Pressure	bar	250	250	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350	350	350
Max continuous speed	rpm	950	950	950	800	800	750	750	750
Peak speed	rpm	1050	1050	1050	900	900	850	850	850
Max continuous power	HP	27	37	37	37	37	37	37	37
	kW	20	27	27	27	27	27	27	27
Max power	HP	54	54	54	54	54	54	54	54
	kW	40	40	40	40	40	40	40	40


- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 26 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 2÷3 rpm
- Flushing flow^(*):

IAM H1 80 – 100 – 150	5 l/min
IAM H1 175 – 195 – 200 – 250 – 300	6 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.



SIZE

IAM 200-250-300 H1

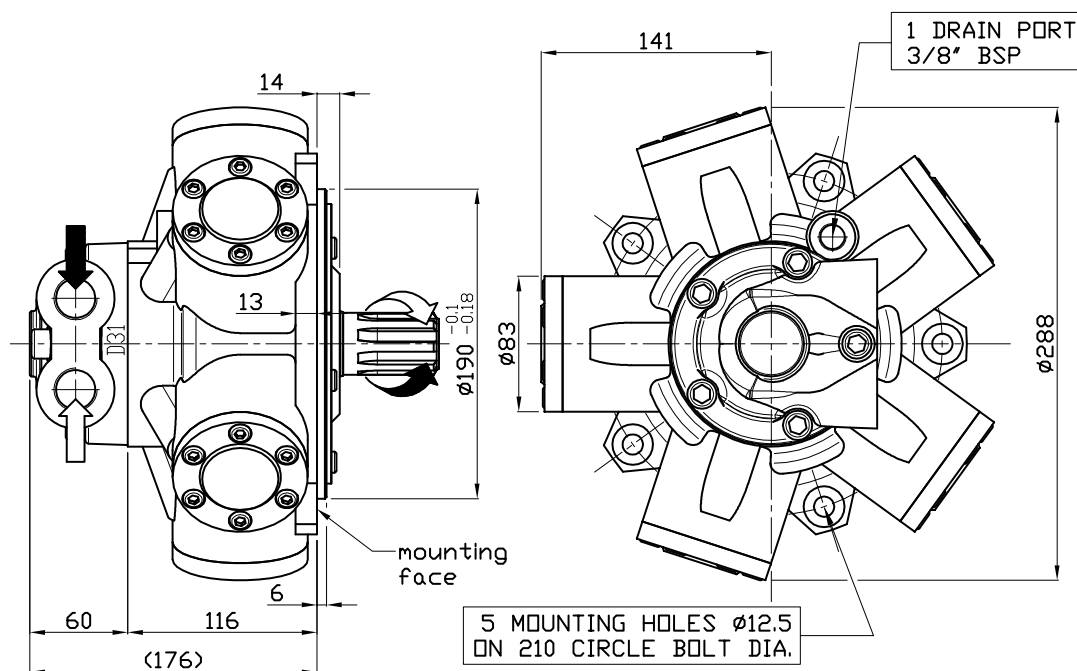

SHAFT


IAM 200-250-300 H1

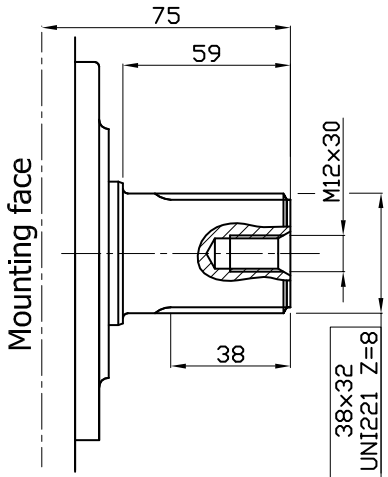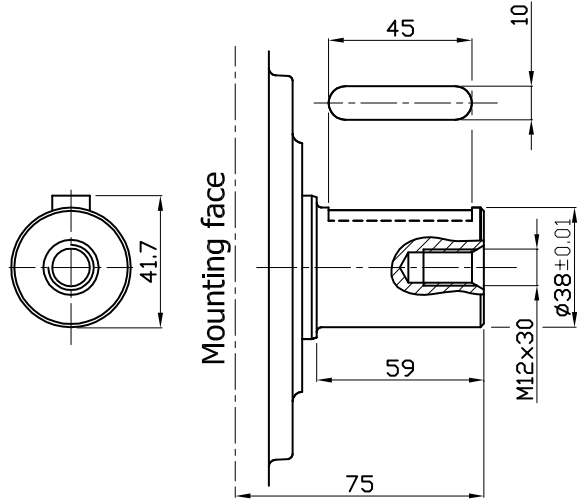A0: Standard splined shaft	A2: Parallel shaft on request
	
FEMALE SHAFT AVAILABLE UPON REQUEST N35x2x30x16x9H DIN 5480 (300 cc/Rev only)	

INTERCHANGEABLE WITH GM05

SIZE


IAM 100/GM05 150/GM05 175/GM05 195/GM05 250/GM05 H1

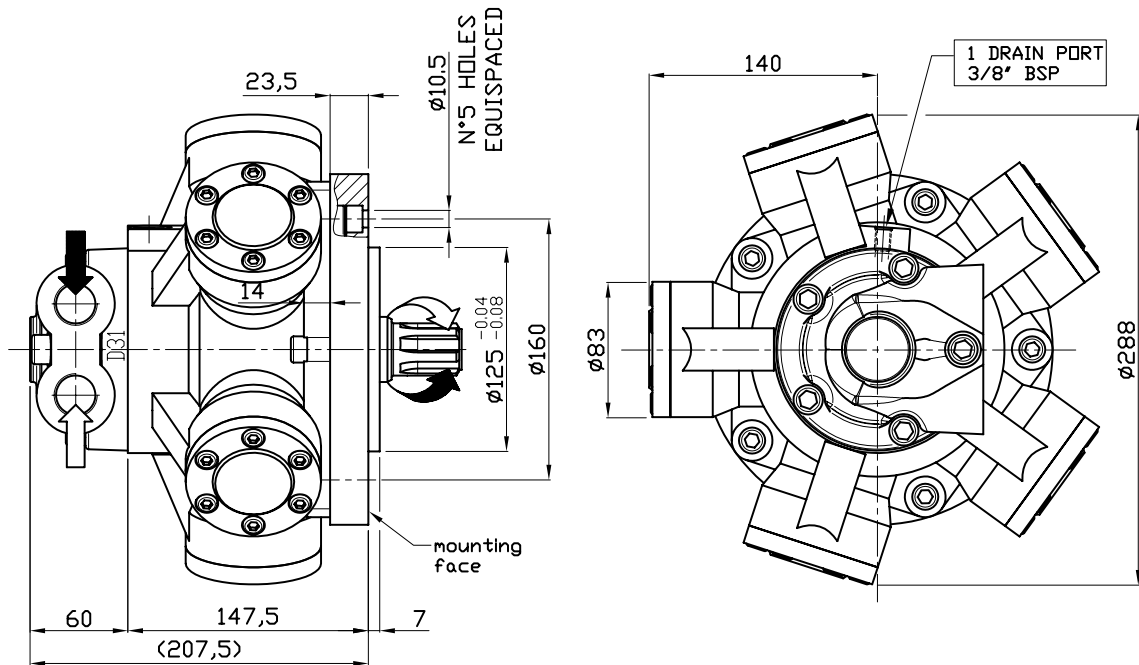

SHAFT


IAM 100/GM05 150/GM05 175/GM05 195/GM05 250/GM05 H1

A0: Standard splined shaft

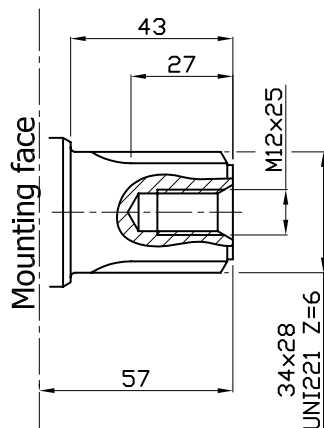

SIZE


IAM 100/BH-150/BH-175/BH-195/BH-250/BH H1

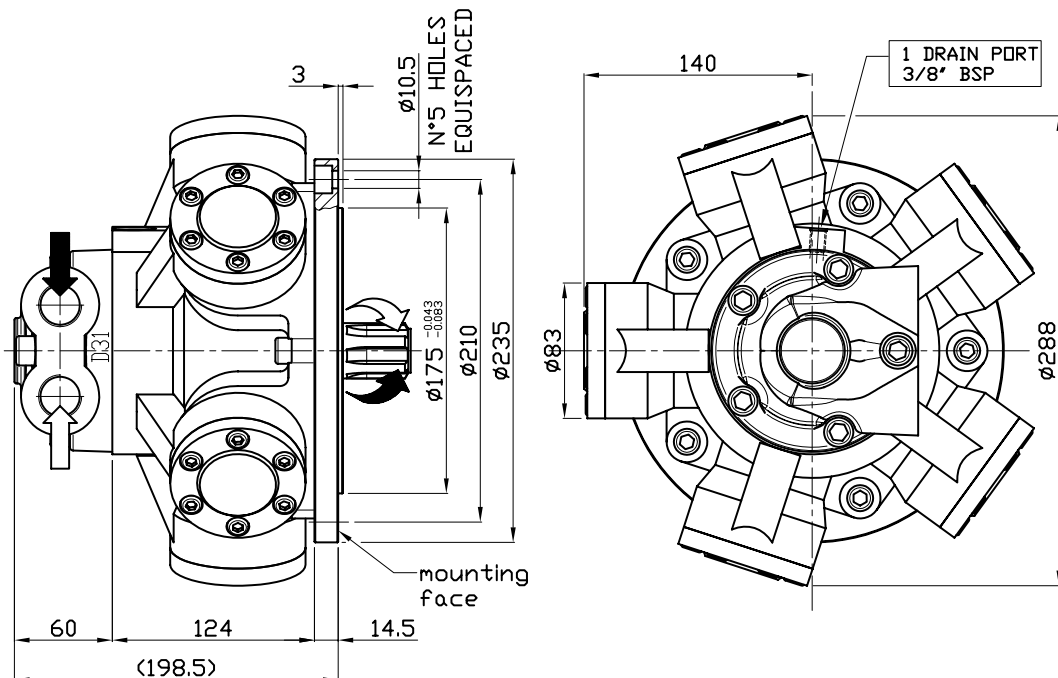

SHAFT


IAM 100/BH-150/BH-175/BH-195/BH-250/BH H1

A0: Standard splined shaft

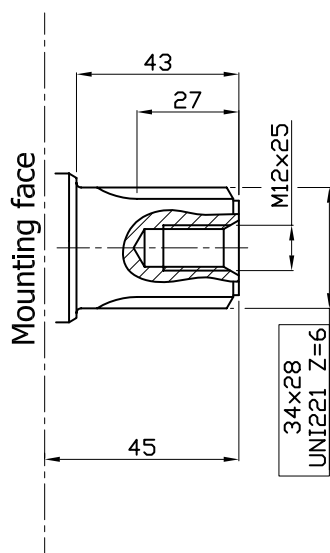

SIZE


IAM 200/PH-250/PH-300/PH H1

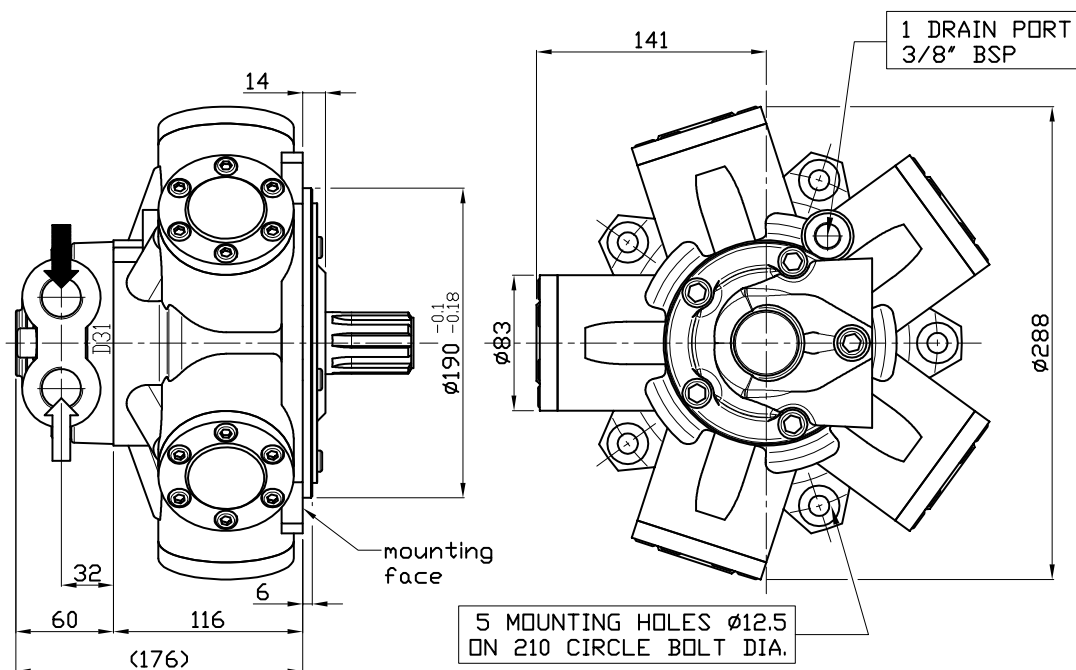

SHAFT

IAM 200/PH-250/PH-300/PH H1





A0: Standard splined shaft

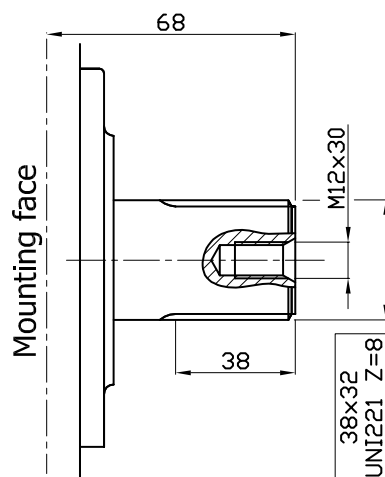

ORDERING INSTRUCTIONS





	IAM	- - -	- - -	H1	A -	D - -	- - -	SB -
Motor model	↑							
IAM								
Displacement		↑						
Interchangeability			↑					
	/BH							
	/PH							
	/GM05							
	/GM1							
Housing				↑				
Shaft					↑			
	A0	standard splined shaft						
	A1	special splined shaft						
	A2	parallel keyed shaft						
	A3	special female shaft						
	A..	other shaft						
Distributor						↑		
	D31	(3/4" BSP)						
	D310	(1" BSP)	BSP THREAD					
	D40	(1" BSP)	CONFIGURATIONS					
	D47	SAE CONFIGURATIONS						
Tachometer							↑	
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet								↑
	SB1	26x32 UNI 221						
	SB2	32x38 UNI 221						
	SB14	28x34 UNI 221						

EXAMPLE: IAM.100/BH.H1.A0.D40.J.SB14
IAM.250.H1.A0.D31.TA.SB2

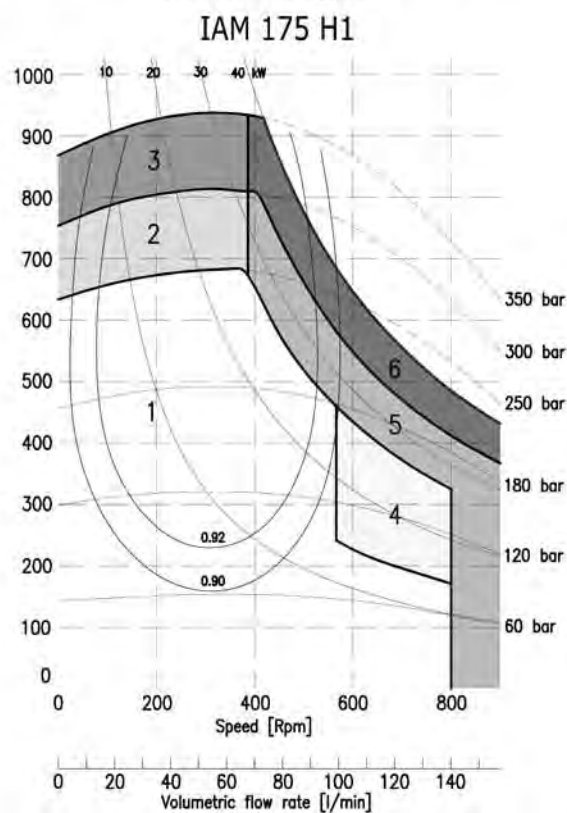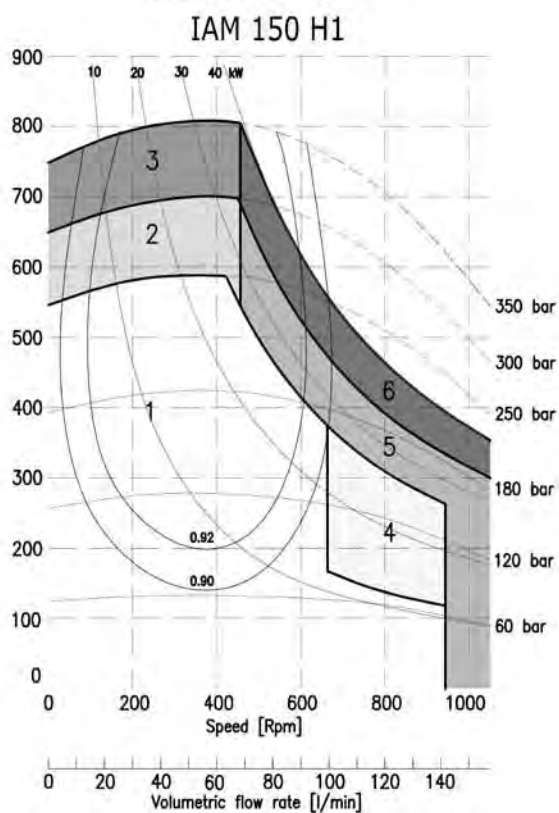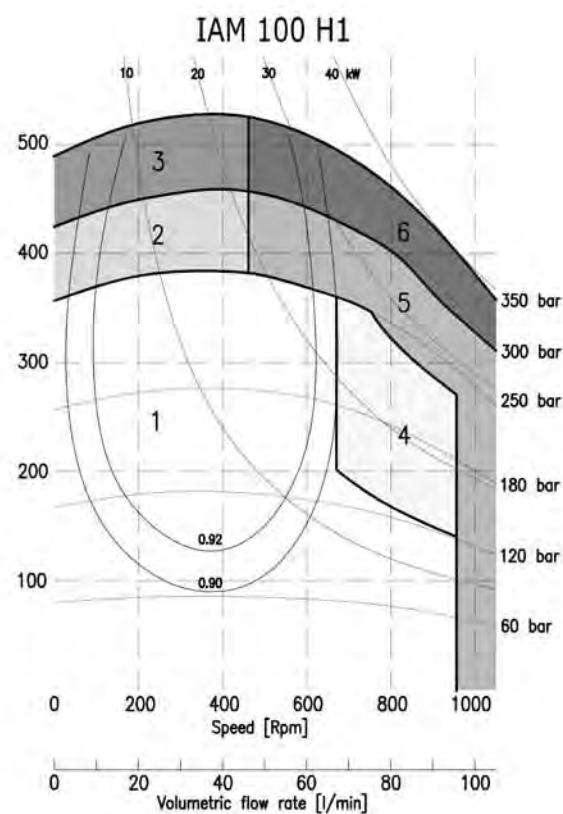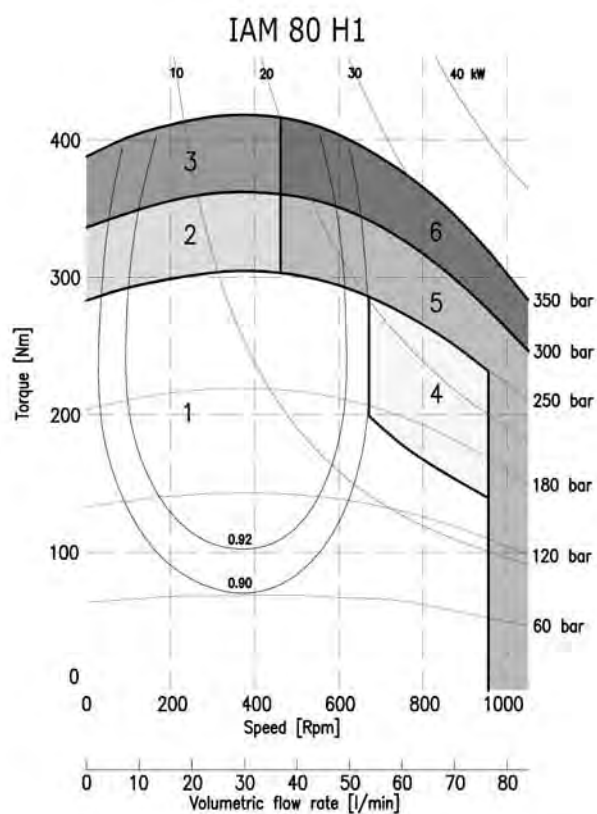

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

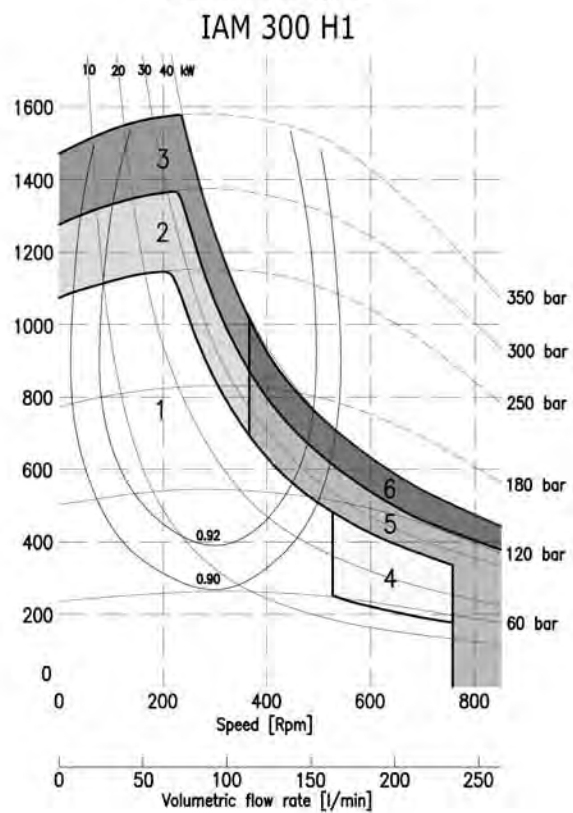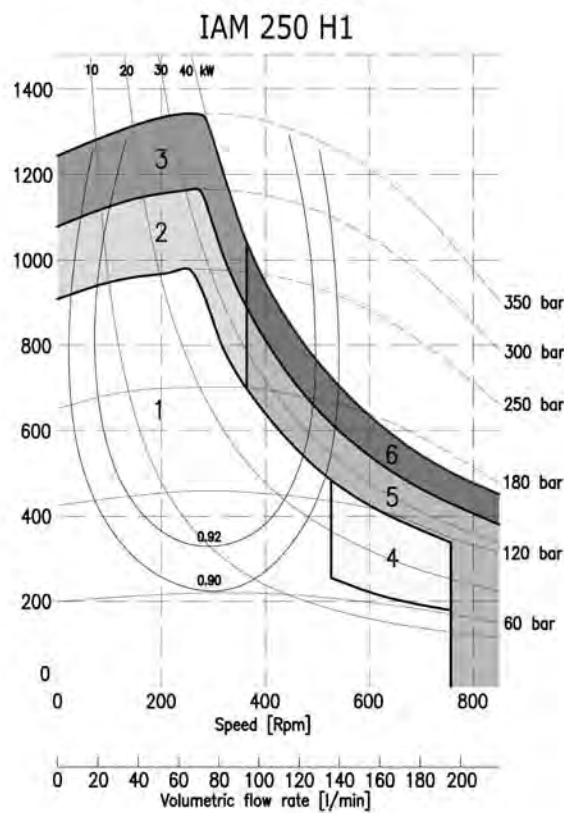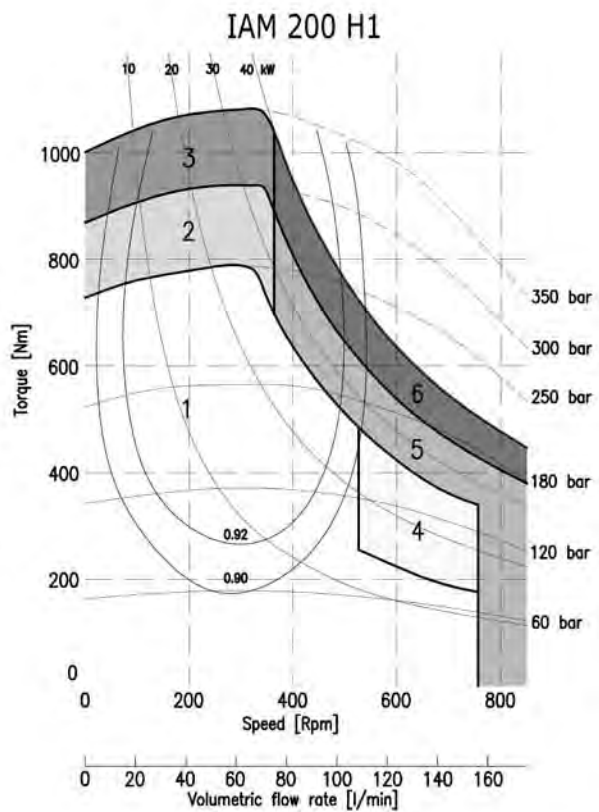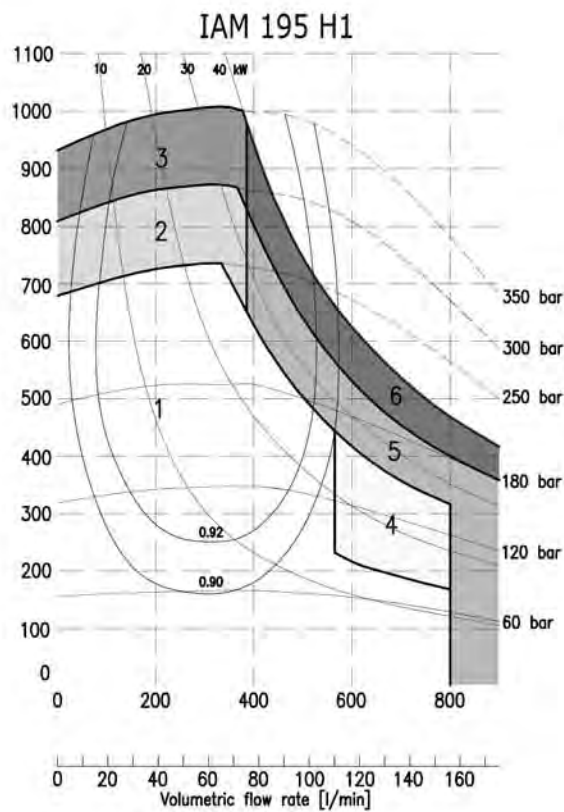

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H2 MODEL

***IAM 200-250-300-350
400-500-600 H2***

IAM 190/C H2

IAM 300/C H2

IAM 200/B10 H2

***IAM 200-250-300-350
400-500-600/PH H2***

***IAM 200-250-300-350
400-500-600/GM2 H2***

***IAM 200-250-300-350
400-500-600/S H2***

INDEX

TECHNICAL DATA - - - - -	<i>Pag.</i>	28
IAM H2 200-250-300-350 - - - - -	"	29
IAM H2 400-500-600 - - - - -	"	30
IAM H2 190/C - - - - -	"	31
IAM H2 300/C - - - - -	"	32
IAM H2 200/B10 - - - - -	"	33
IAM H2 200-250-300-350-400-500-600/PH - - - - -	"	34
IAM H2 200-250-300-350-400-500-600/GM2 - - - - -	"	35
IAM H2 200-250-300-350-400-500-600/S - - - - -	"	36
ORDERING INSTRUCTIONS - - - - -	"	37
GRAPHIC PERFORMANCES H2 200-250-300-350 - - - - -	"	38
GRAPHIC PERFORMANCES H2 400-500-600 - - - - -	"	39

TECHNICAL DATA

H2

MODEL		IAM 200 H2	IAM 250 H2	IAM 300 H2	IAM 350 H2	IAM 400 H2	IAM 500 H2	IAM 600 H2
Displacement	cc/rev	198	253	314	362	424	492	584
Specific Torque	Nm/bar	3.2	4.0	5.0	5.8	6.7	7.8	9.3
Max cont. Pressure	bar	250	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350	350
Max continuous speed	rpm	800	750	750	650	600	500	500
Peak speed	rpm	900	850	850	750	700	600	600
Max continuous power	HP	45	45	45	45	45	45	45
	kW	33	33	33	33	33	33	33
Max power	HP	66	66	66	66	66	66	66
	kW	49	49	49	49	49	49	49


- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 42 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 2 rpm
- Flushing flow^(*):

IAM H2 200 – 250 – 300	6 l/min
IAM H2 350 – 400 – 500	8 l/min
IAM H2 600	10 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 200-250-300-350 H2

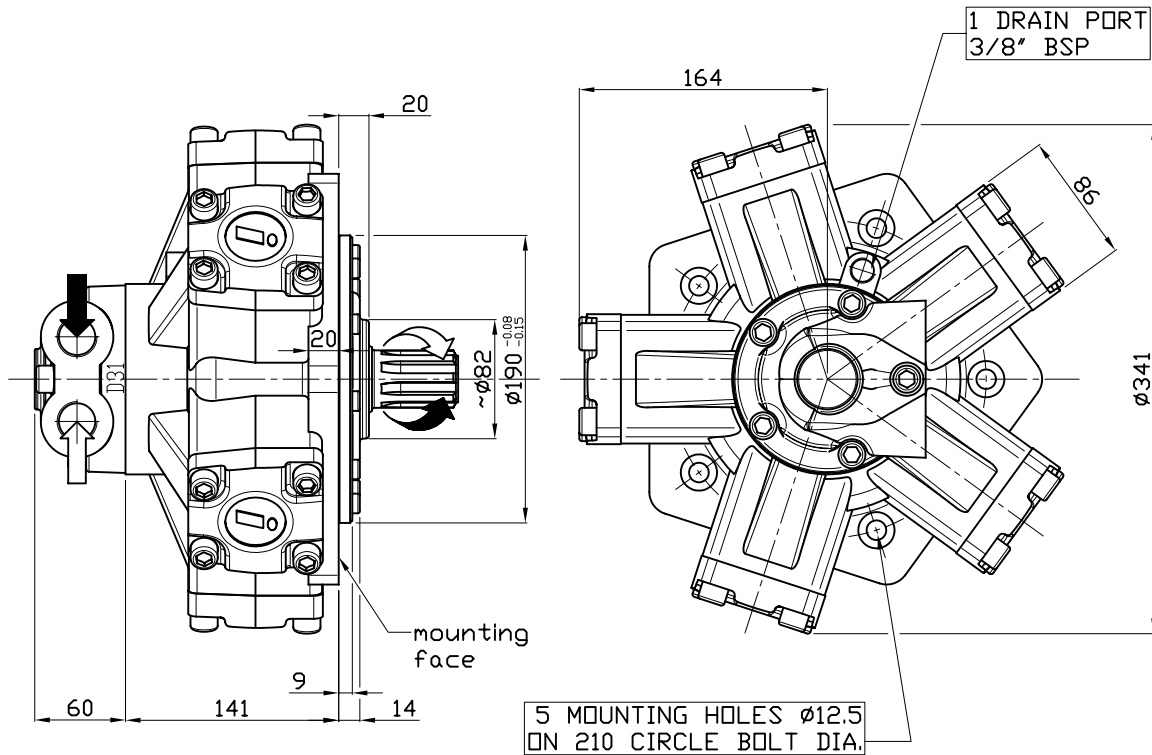


SHAFT

IAM 200-250-300-350 H2

A0: Standard splined shaft

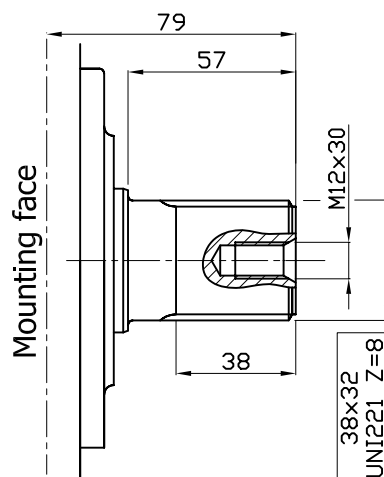


A2: Parallel shaft on request

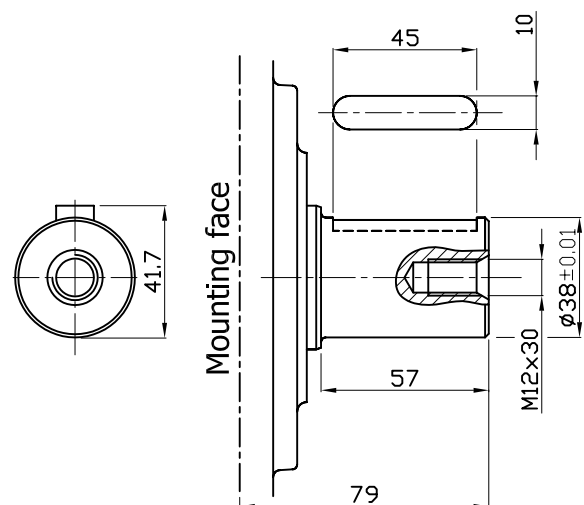

ONLY FOR IAM 300 H2: FEMALE SHAFT AVAILABLE UPON REQUEST 40x3x12x9H DIN 5480

SIZE


IAM 400-500-600 H2

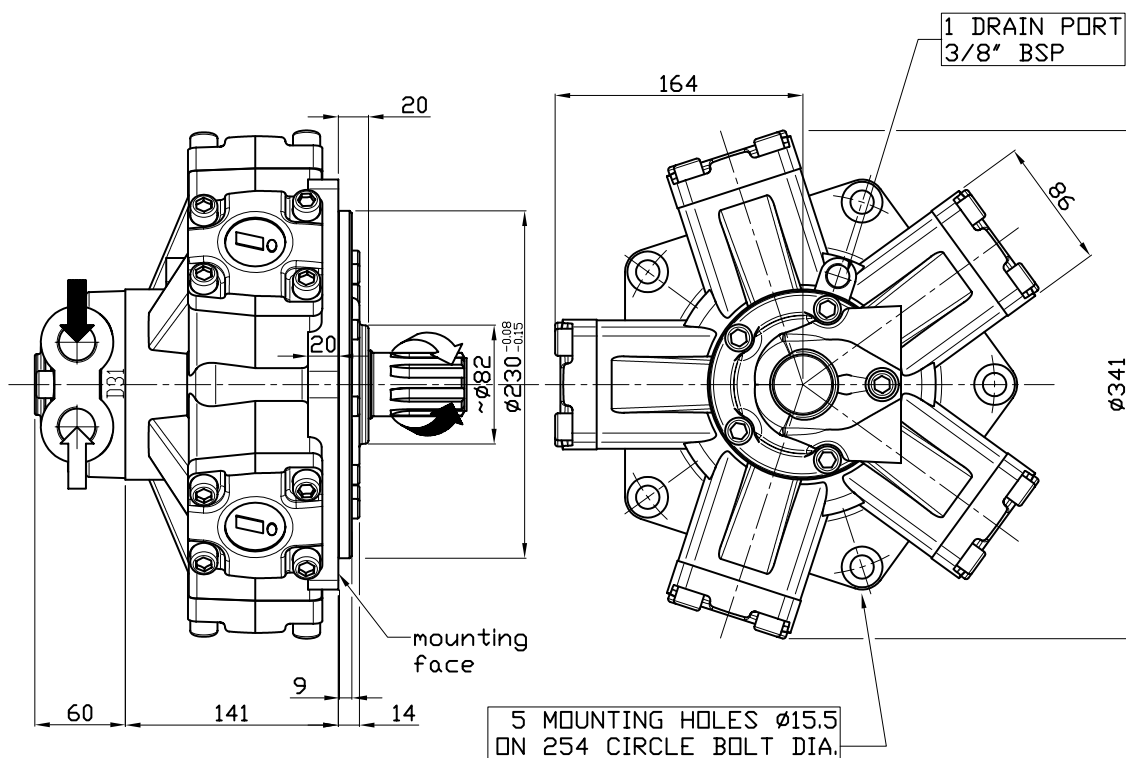


SHAFT

IAM 400-500-600 H2

A0: Standard splined shaft

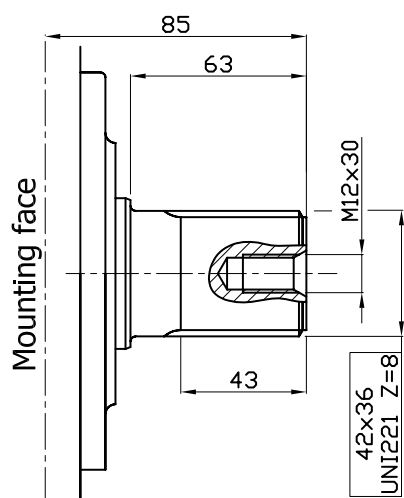


A2: Parallel shaft on request

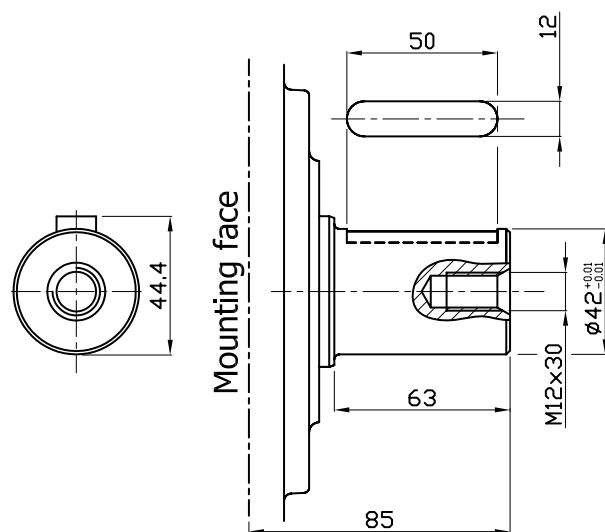

SIZE

IAM 190/C H2


Displacement:
198 cc/rev

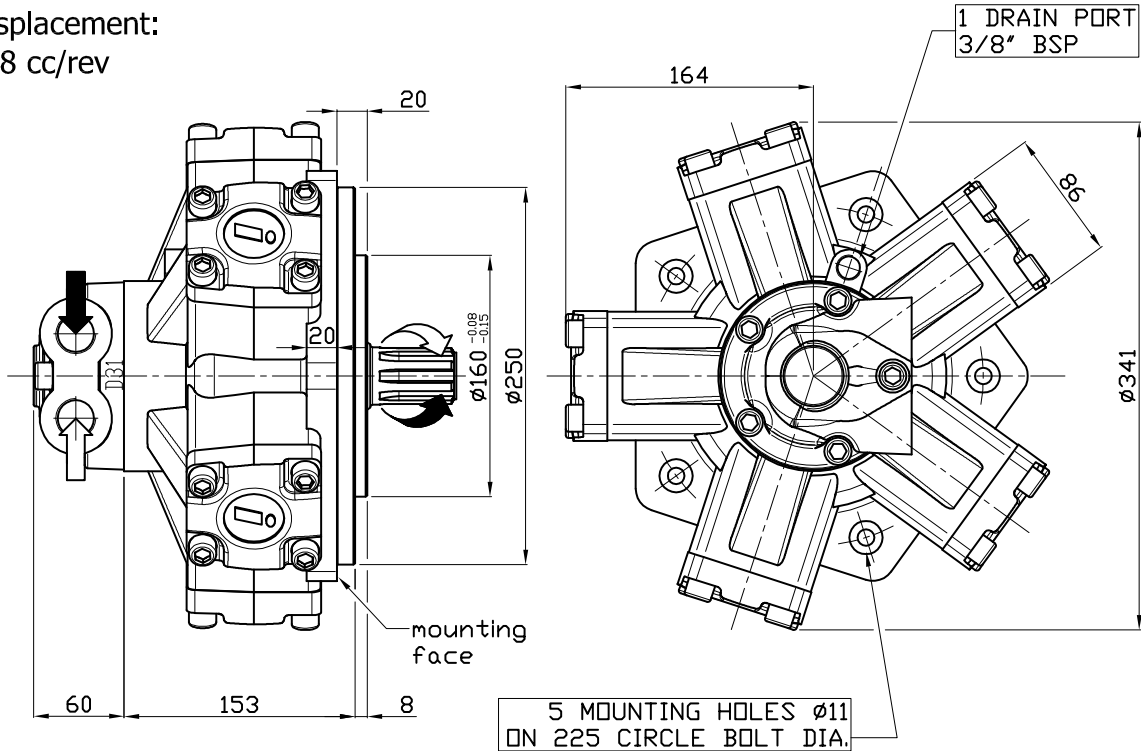


SHAFT & OPTION

IAM 190/C H2

A0: Standard splined shaft

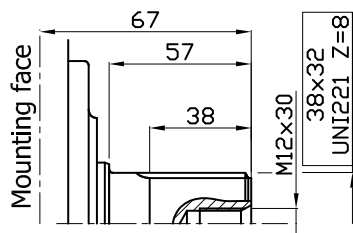


A2: Parallel shaft on request

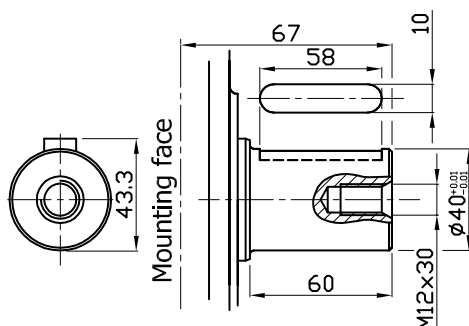

FL1: connection block

Connection block, fitting D47 distributor, for motor MR 160/190/250/300

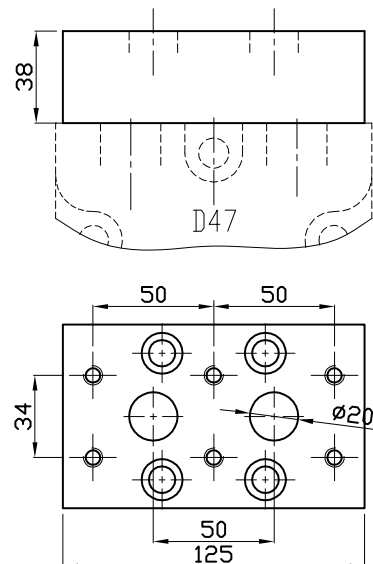

SIZE

IAM 300/C H2


(available displacements:

253 cc/Rev

289 cc/Rev

339 cc/Rev


393 cc/Rev)

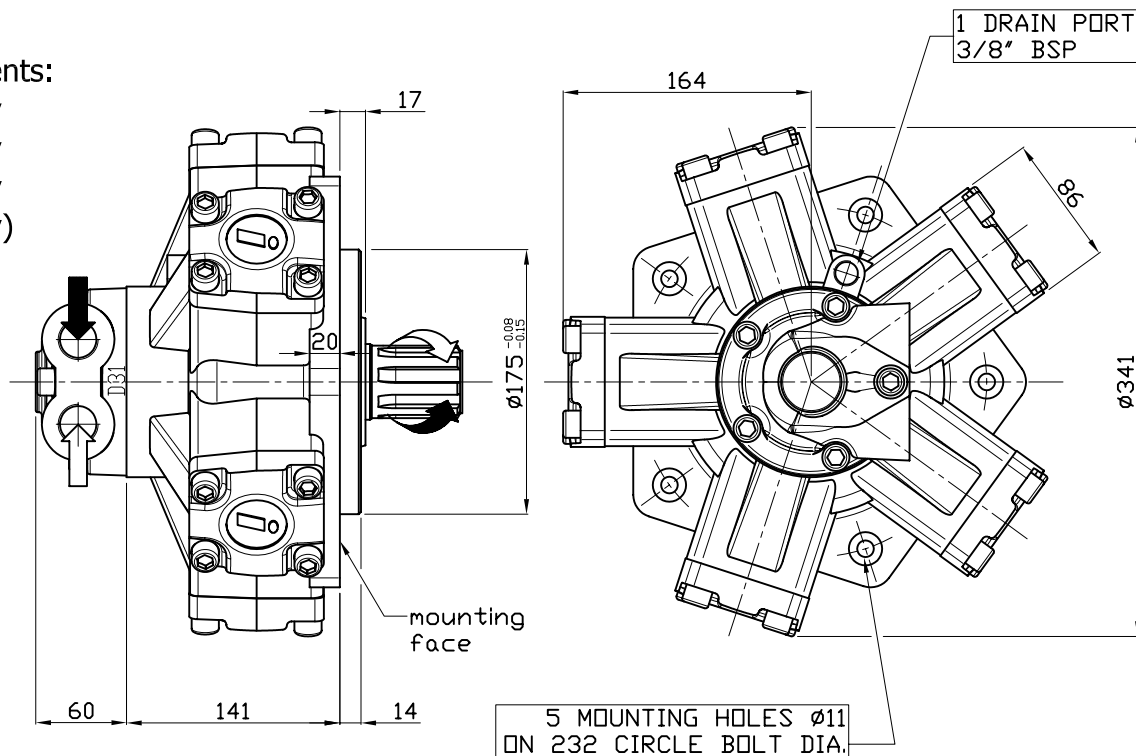

SHAFT & OPTION


IAM 300/C H2

A0: Standard splined shaft

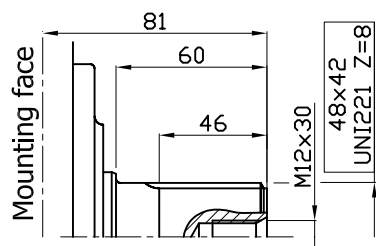


A2: Parallel shaft on request

(not available for 253 cc/Rev displacement)

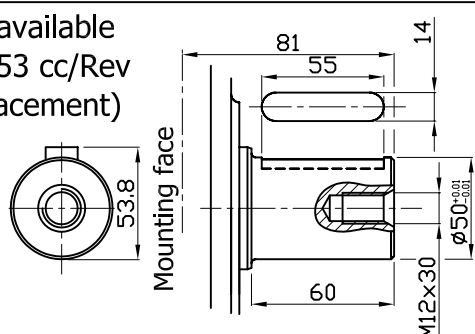

FL1: connection block


Connection block, fitting D47 distributor, for motor MR 160/190/250/300

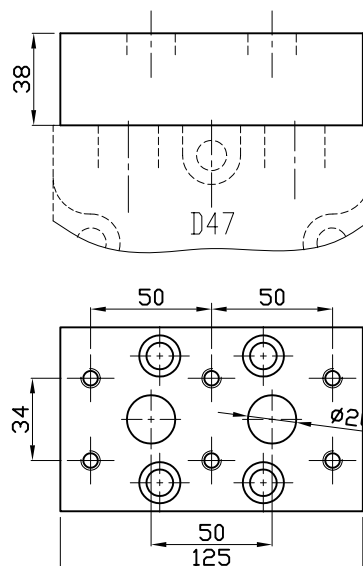

INTERCHANGEABLE WITH GM2

SIZE


IAM 200/GM2 250/GM2 300/GM2 350/GM2 400/GM2 500/GM2 600/GM2 H2

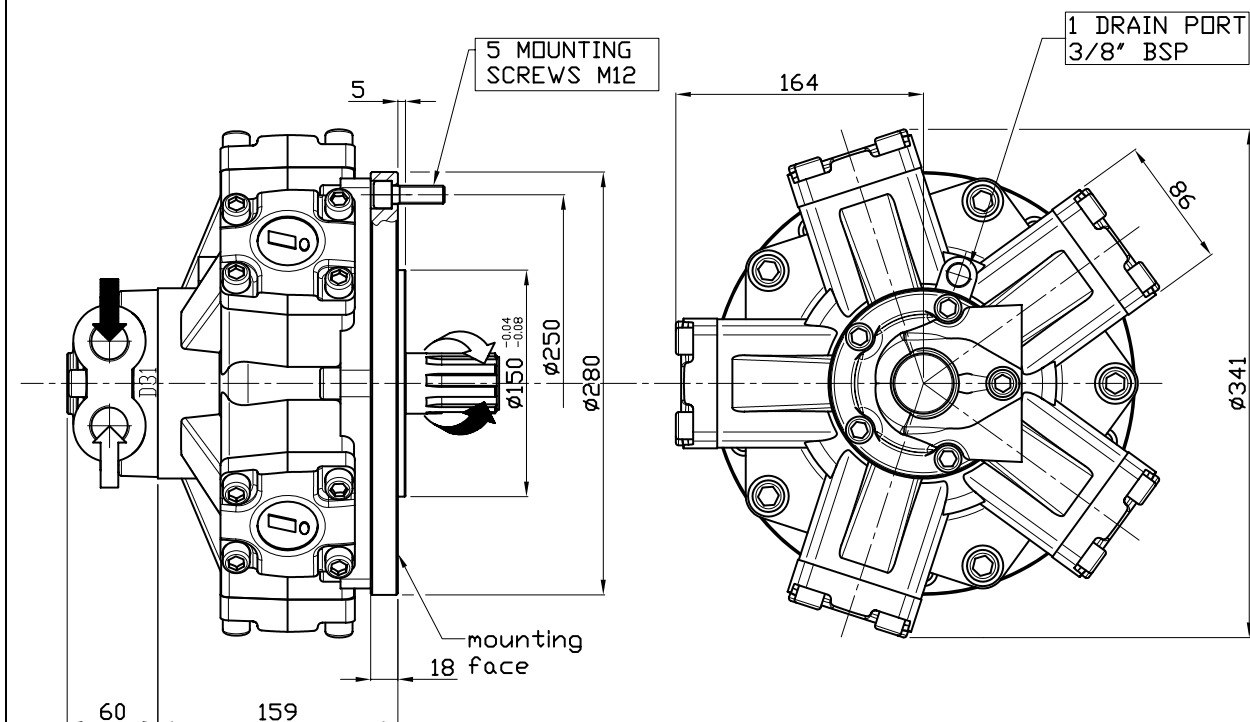


SHAFT

IAM 200/GM2 250/GM2 300/GM2 350/GM2 400/GM2 500/GM2 600/GM2 H2


A0: Standard splined shaft

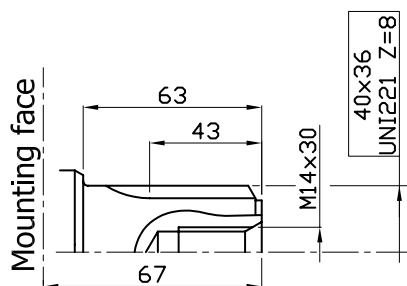

A2: Parallel shaft on request

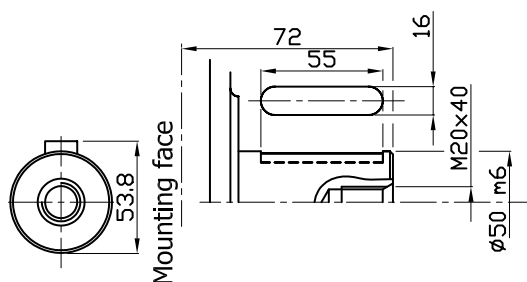

A3: Female shaft on request

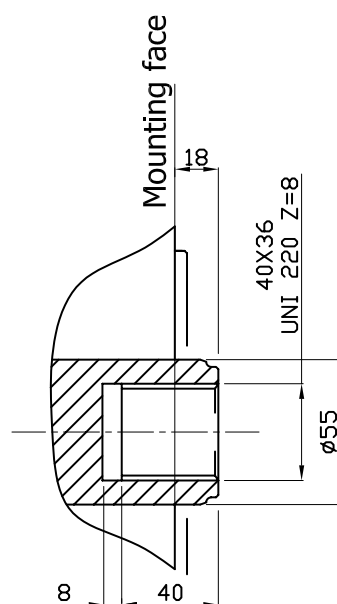


MTCP SERIES AVAILABLE ON REQUEST

SIZE

INTERCHANGEABLE WITH M2


IAM 200/S 250/S 300/S 350/S 400/S 500/S 600/S H2

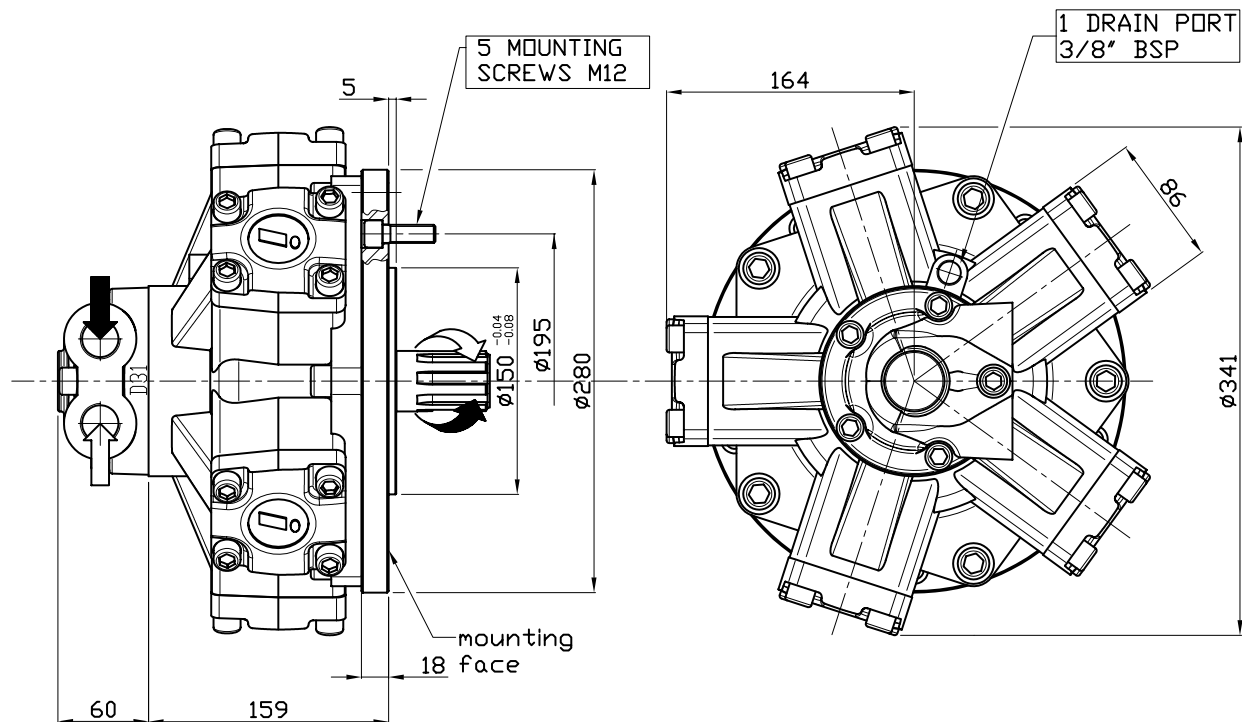


SHAFT

IAM 200/S 250/S 300/S 350/S 400/S 500/S 600/S H2


A0: Standard splined shaft

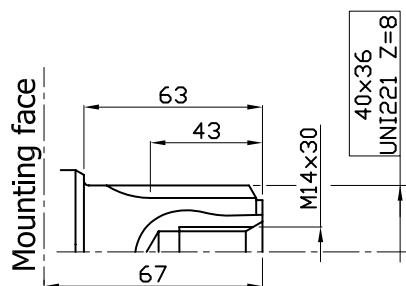

A2: Parallel shaft on request

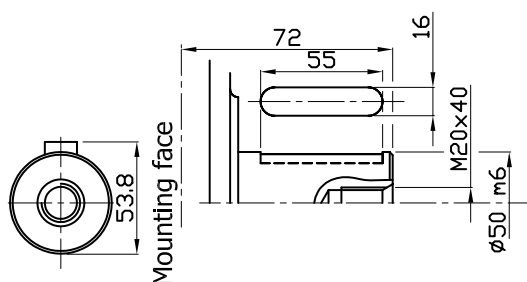

A3: Female shaft on request




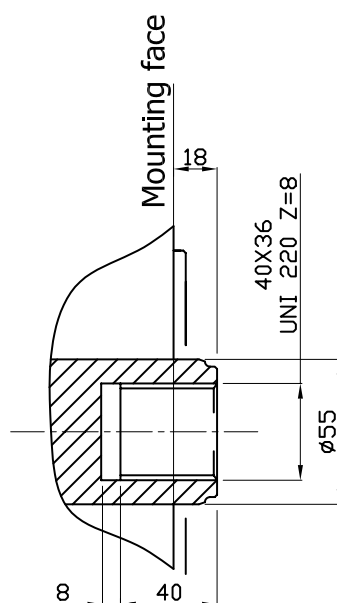


MTCP SERIES AVAILABLE ON REQUEST

ORDERING INSTRUCTIONS




	IAM	- - -	- - -	H2	A -	D - -	- - -	SB -
Motor model	↑							
IAM								
Displacement		↑						
Interchangeability			↑					
	/C	(190/C, 300/C)						
	/B10	(200/B10)						
	/PH							
	/GM2	/S						
Housing				↑				
Shaft					↑			
	A0	standard splined shaft						
	A1	special splined shaft						
	A2	parallel keyed shaft						
	A3	special female shaft						
	A..	other shaft						
Distributor						↑		
	D31	(3/4" BSP)						
	D310	(1" BSP)	BSP THREAD					
	D40	(1" BSP)	CONFIGURATIONS					
	D47	SAE CONFIGURATIONS						
Tachometer							↑	
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet								↑
	SB2	32x38 UNI 221						
	SB3	36x42 UNI 221						
	SB15	42x48 UNI 222						

EXAMPLE: IAM.200.H2.A0.D40
 IAM.190/C.H2.A0.D47.J
 IAM.200/B10.H2.A0.D31.TA

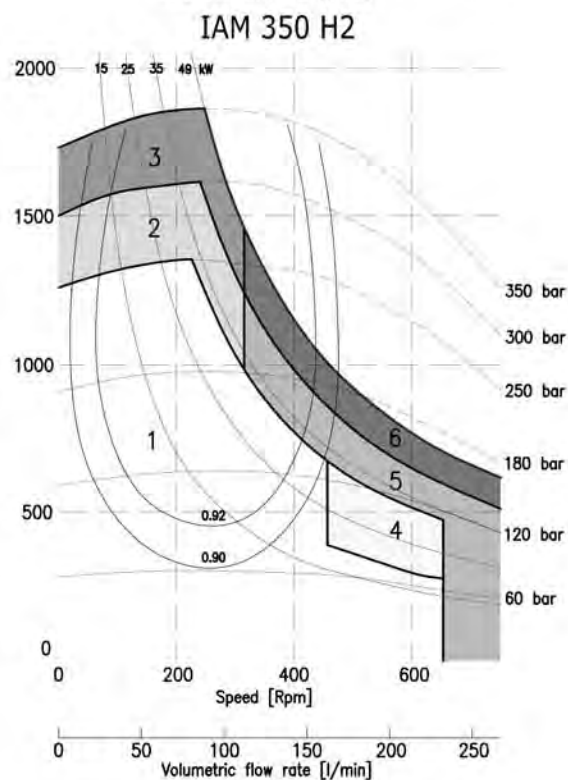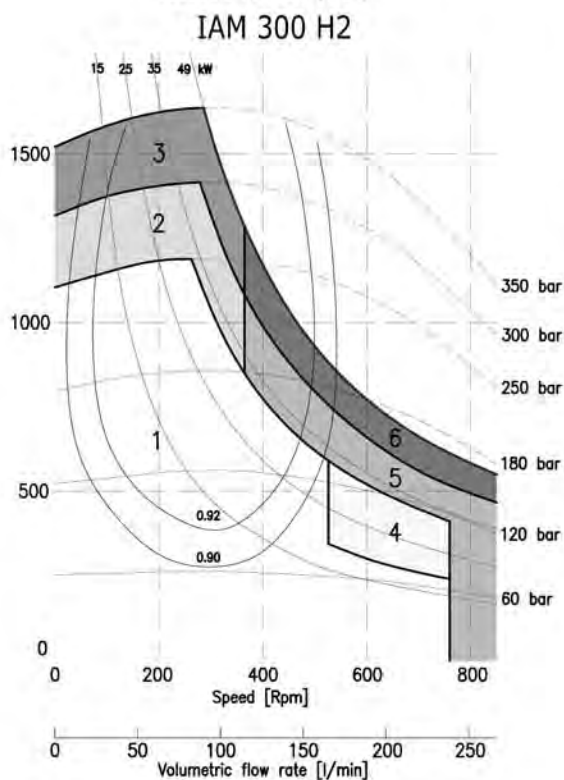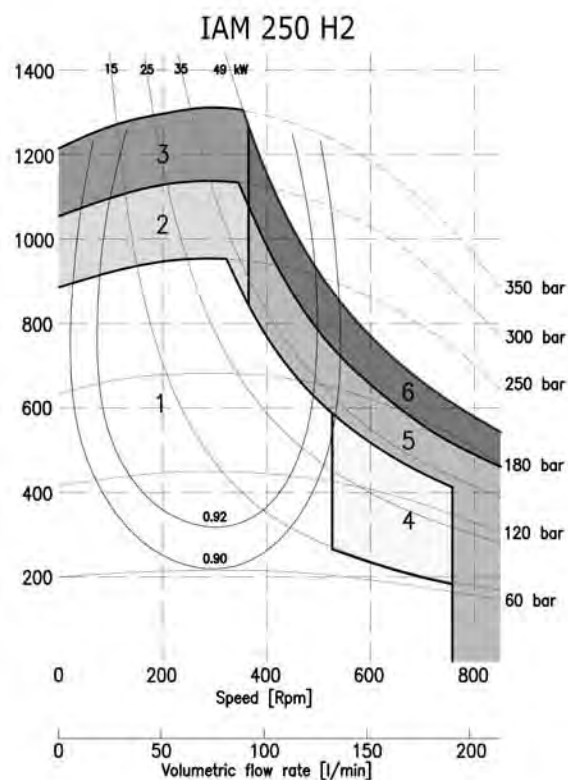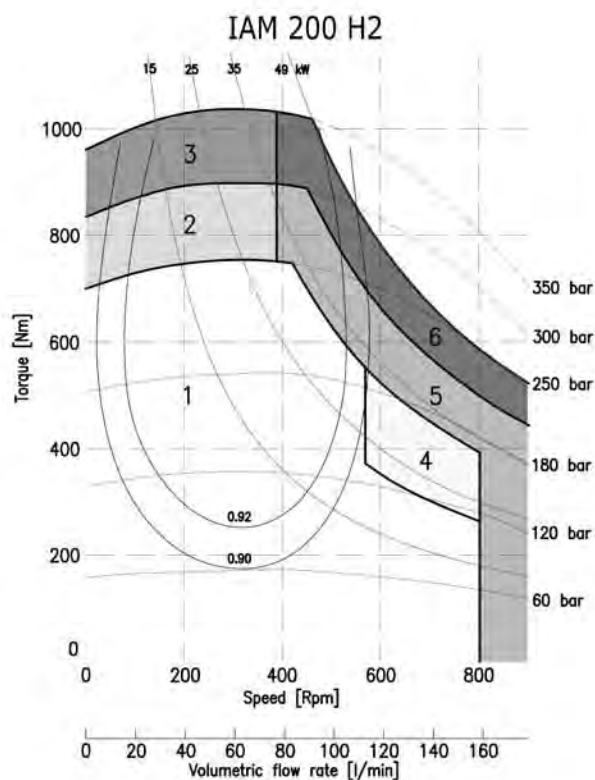

- | | |
|---|--|
| 1 | Continuous operation |
| 2 | Intermittent operation for period 3-5 minutes every 10-15 minutes |
| 3 | Intermittent operation for very short period (3-5 seconds every 10-15 minutes) |

- | | |
|---|--|
| 4 | Continuous operation with flushing |
| 5 | Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing |
| 6 | Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing |

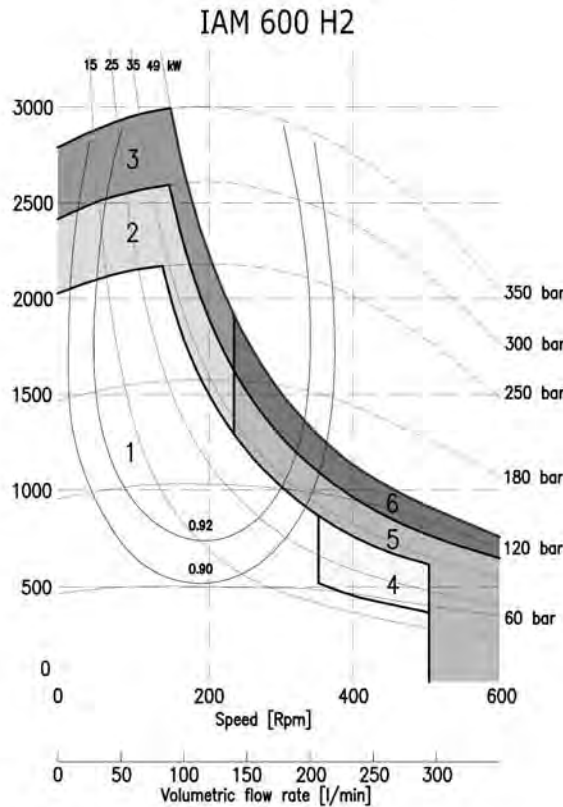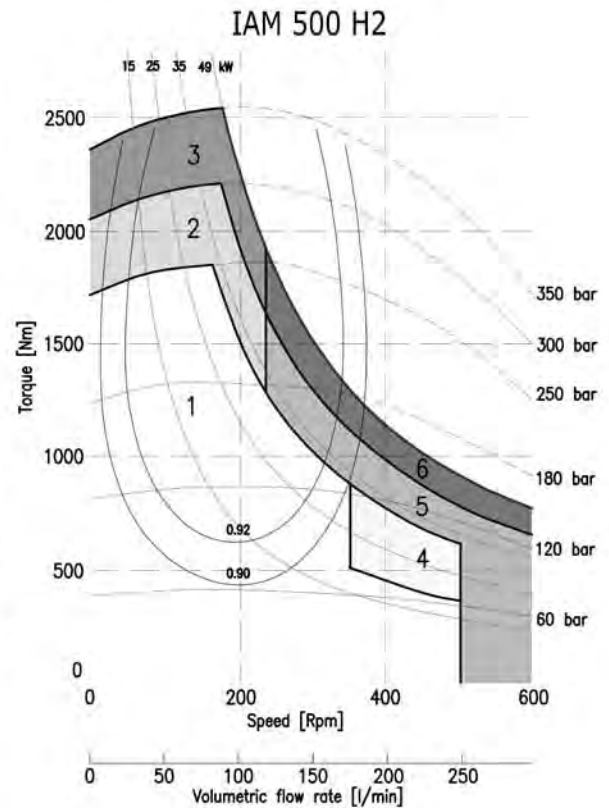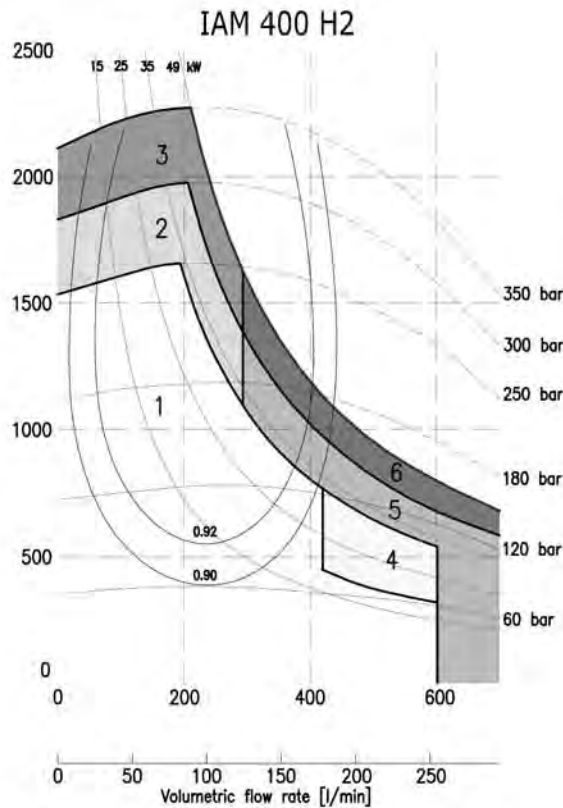

- | | |
|---|--|
| 1 | Continuous operation |
| 2 | Intermittent operation for period 3-5 minutes every 10-15 minutes |
| 3 | Intermittent operation for very short period (3-5 seconds every 10-15 minutes) |

- | | |
|---|--|
| 4 | Continuous operation with flushing |
| 5 | Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing |
| 6 | Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing |

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H3 MODEL

***IAM 350-400-450-500
600-650-700 H3***

IAM 450/C H3

IAM 450/B30 H3

IAM 800 H3

IAM 800/N H3

***IAM 400-450-500
600-700/GM3 H3***

***IAM 400-450-500
600-700/S H3***

INDEX

TECHNICAL DATA - - - - -	Pag.	42
IAM H3 350-400-450-500-600-650-700- - - - -	"	43
IAM H3 450/C - - - - -	"	44
IAM H3 450/B30 - - - - -	"	45
IAM H3 800 - - - - -	"	46
IAM H3 800/N - - - - -	"	47
IAM H3 400-450-500-600-700/GM3 - - - - -	"	48
IAM H3 400-450-500-600-700/S - - - - -	"	49
ORDERING INSTRUCTIONS - - - - -	"	50
GRAPHIC PERFORMANCES H3 350-400-450-500 - - - - -	"	51
GRAPHIC PERFORMANCES H3 600-650-700-800 - - - - -	"	52

TECHNICAL DATA

H3

MODEL		IAM 350 H3	IAM 400 H3	IAM 450 H3	IAM 500 H3	IAM 600 H3	IAM 650 H3	IAM 700 H3	IAM 800 H3
Displacement	cc/rev	349	397	452	491	594	660	707	791
Specific Torque	Nm/bar	5.6	6.3	7.2	7.8	9.4	10.5	11.2	12.6
Max cont. Pressure	bar	250	250	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350	350	350
Max continuous speed	rpm	630	600	600	600	550	500	450	400
Peak speed	rpm	700	680	680	680	630	580	500	450
Max continuous power	HP	63	63	63	63	63	63	63	63
	kW	45	45	45	45	45	45	45	45
Max power	HP	91	91	91	91	91	91	91	91
	kW	68	68	68	68	68	68	68	68



- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 68 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 1 rpm
- Flushing flow^(*):

IAM H3 350 – 400 – 450 – 500	8 l/min
IAM H3 600 – 650 – 700 – 800	10 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 350-400-450-500-600-650-700 H3

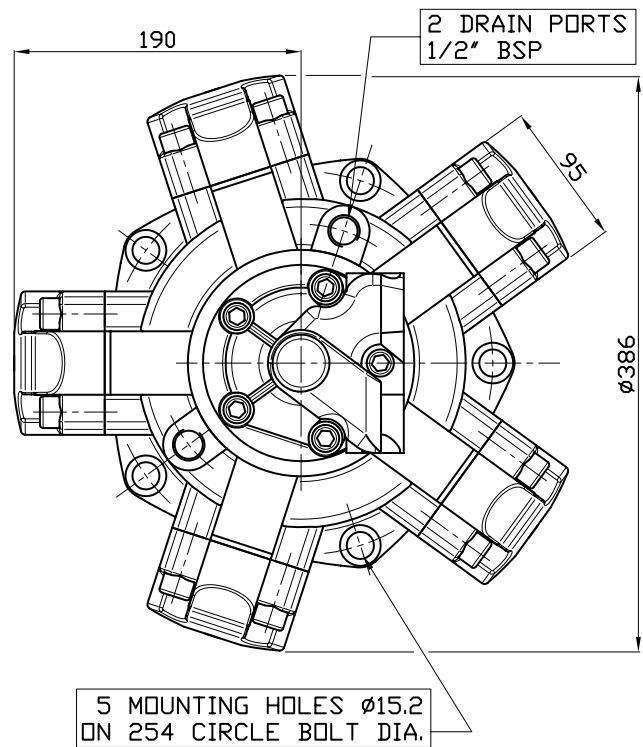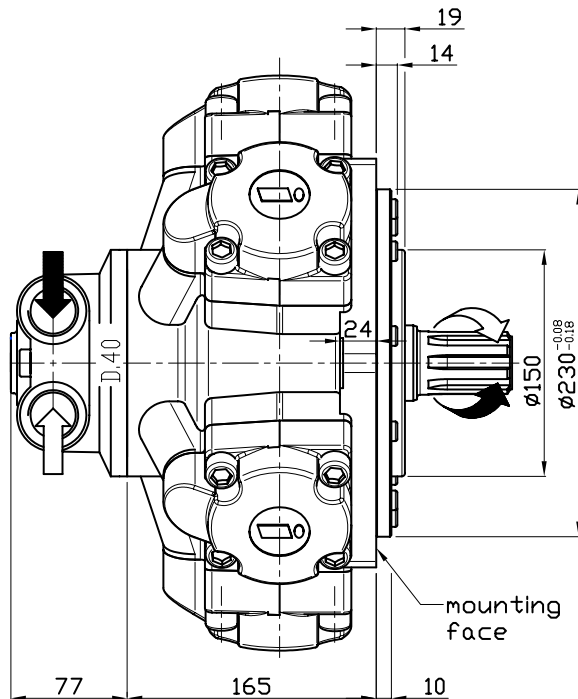


SHAFT

IAM 350-400-450-500-600-650-700 H3

A0: Standard splined shaft

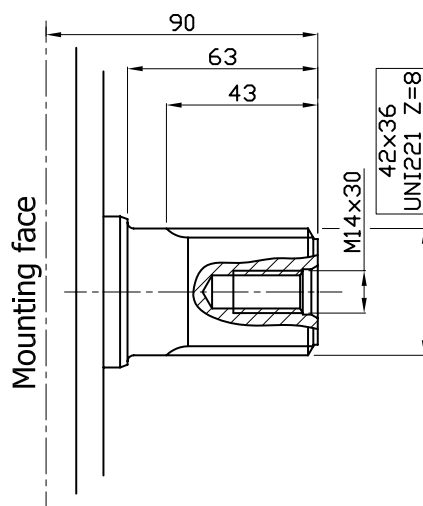


A2: Parallel shaft on request

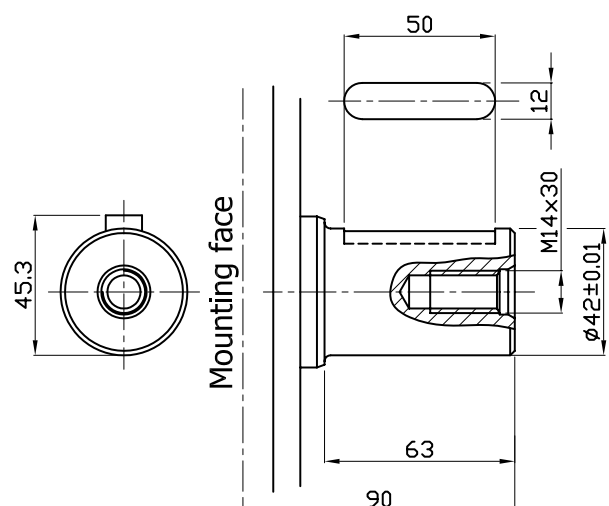

IAM 350 H3 A0 AVAILABLE ON REQUEST

SIZE


IAM 450/C H3

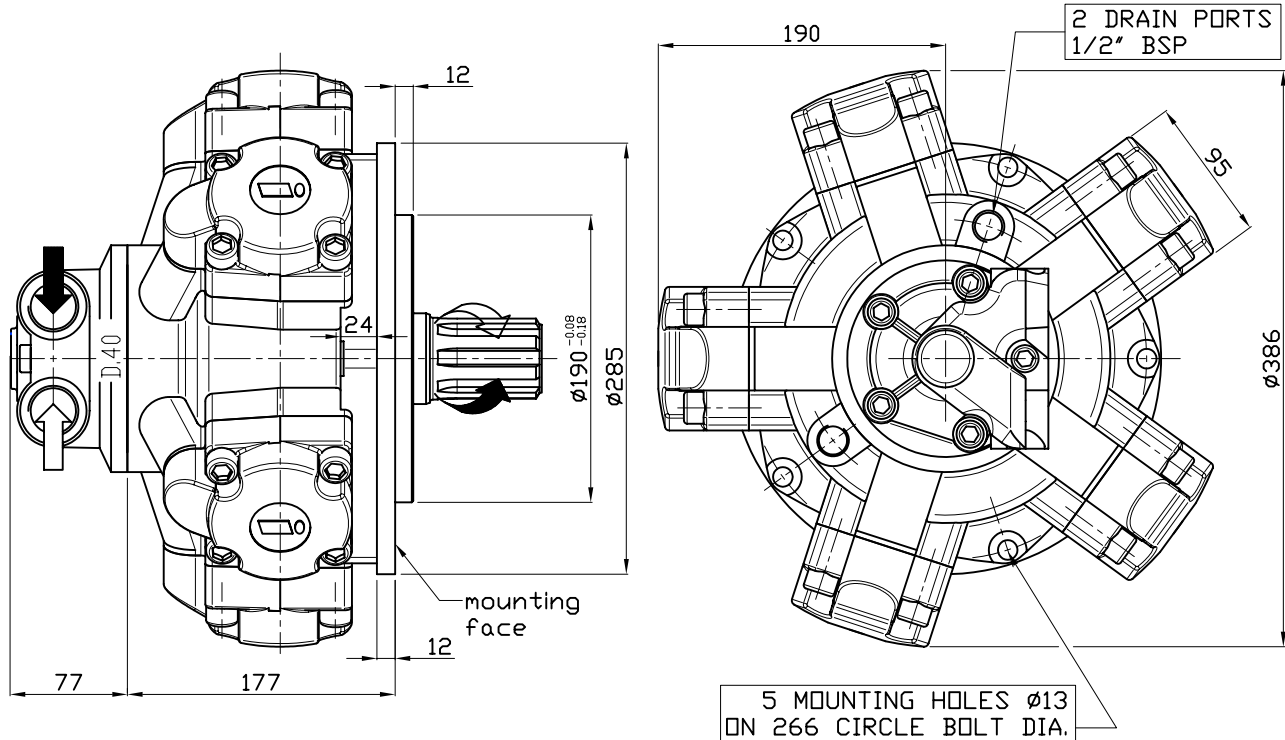


SHAFT & OPTION

IAM 450/C H3

A1: Standard splined shaft

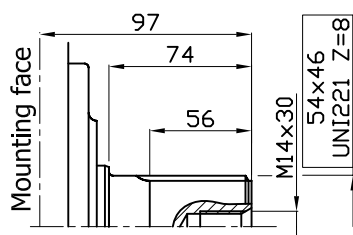


A2: Parallel shaft on request

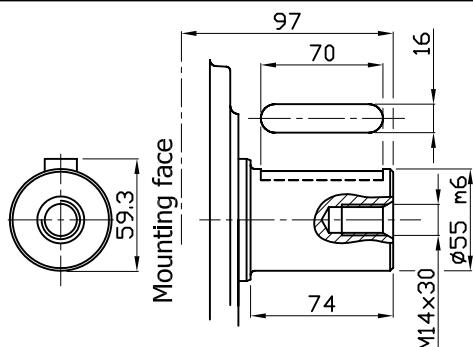


FL2: connection block

Connection block, fitting D47 distributor,
for motor MR 350/450/500/600/700/800

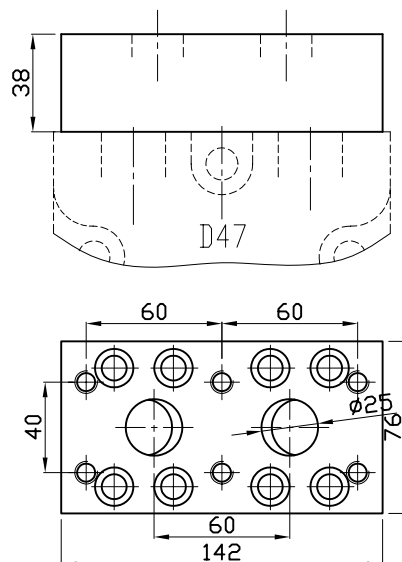




SIZE

IAM 450/B30 H3

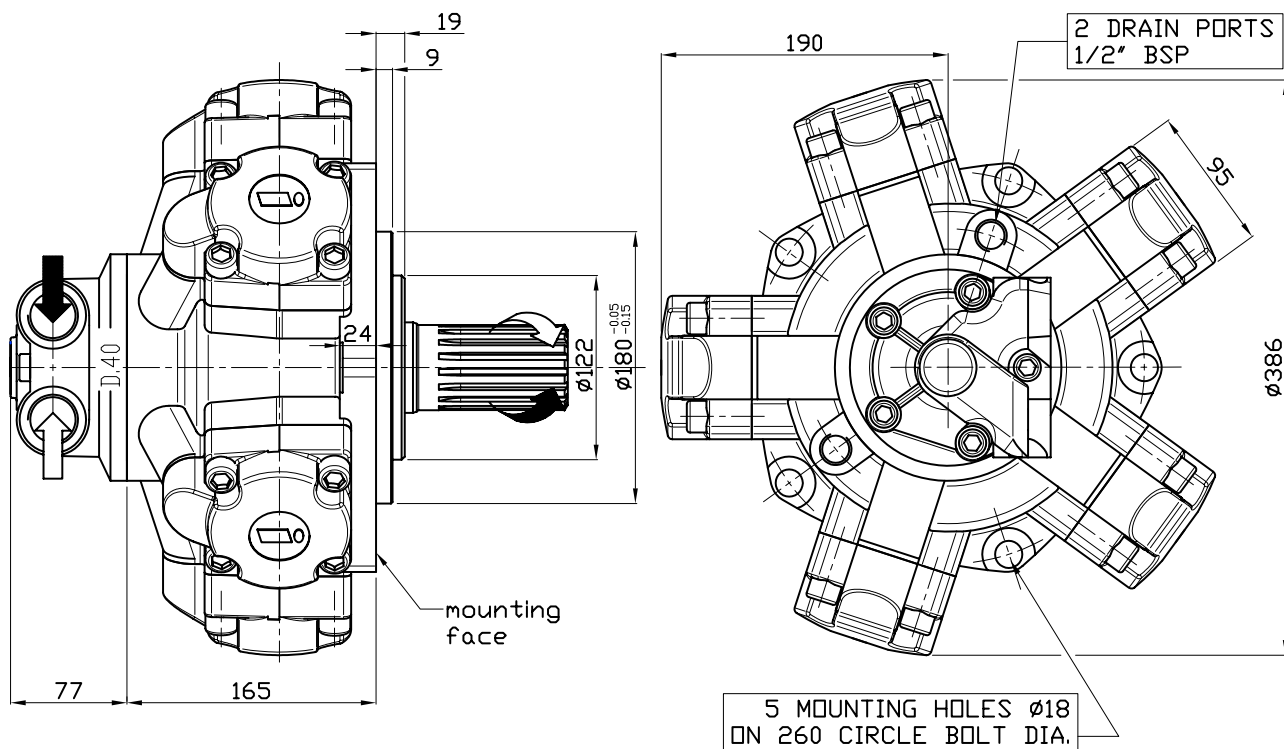


SHAFT

IAM 450/B30 H3

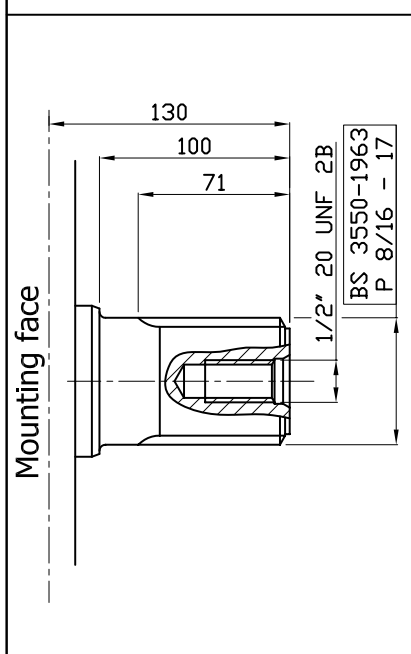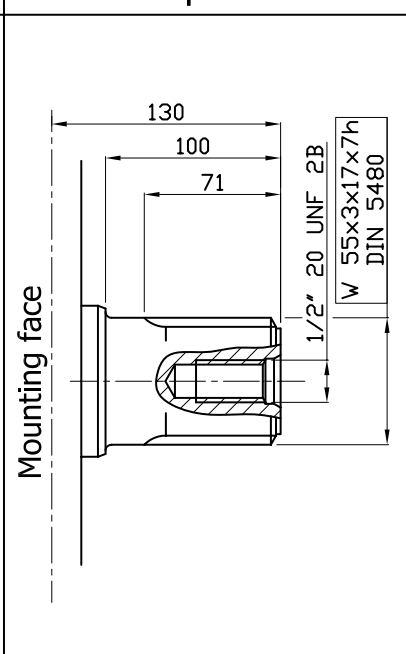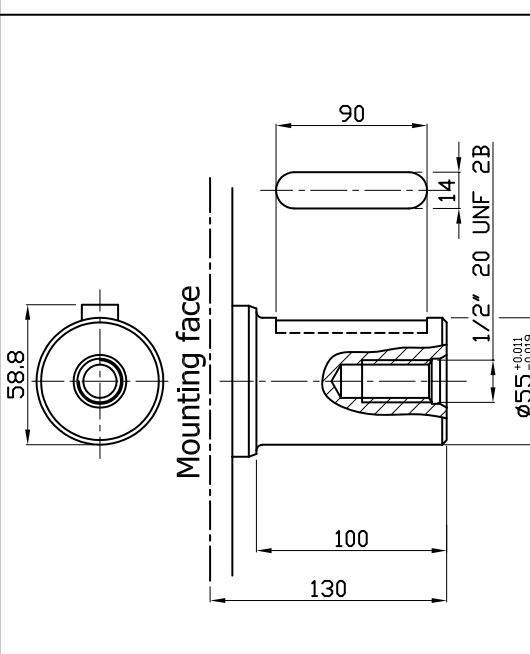A0: Standard splined shaft	A1: Splined shaft on request	A2: Parallel shaft on request
 Technical drawing of the standard splined shaft (A0). The drawing shows the shaft with dimensions: 130 (total length), 100 (splined length), 71 (splined length from mounting face), 1/2" 20 UNF 2B (thread), BS 3550-1963 P 8/16 - 17 (specification), and 58.8 (shaft diameter).	 Technical drawing of the splined shaft on request (A1). The drawing shows the shaft with dimensions: 130 (total length), 100 (splined length), 71 (splined length from mounting face), 1/2" 20 UNF 2B (thread), W 55x3x17x7h (specification), and 58.8 (shaft diameter).	 Technical drawing of the parallel shaft on request (A2). The drawing shows the shaft with dimensions: 90 (total length), 100 (splined length), 130 (splined length from mounting face), 1/2" 20 UNF 2B (thread), $\varnothing 55_{-0.013}^{+0.011}$ (shaft diameter), and 58.8 (shaft diameter).

SIZE


IAM 800 H3

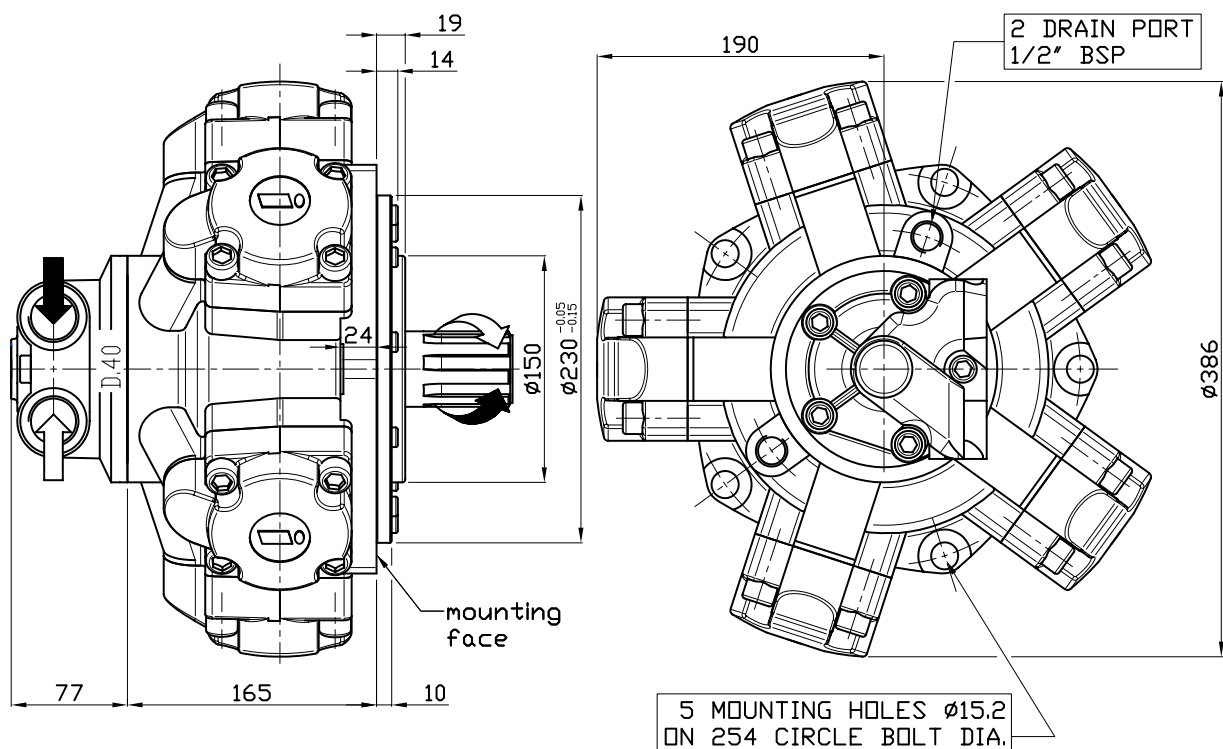


SHAFT

IAM 800 H3


A0: Standard splined shaft

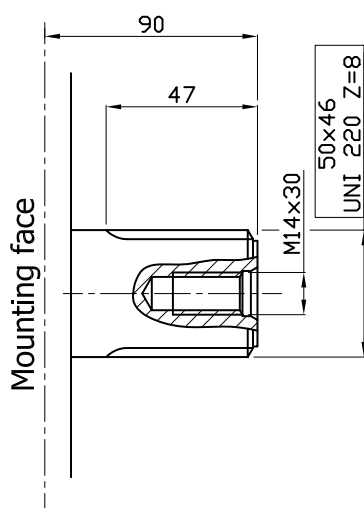

A2: Parallel shaft
on request

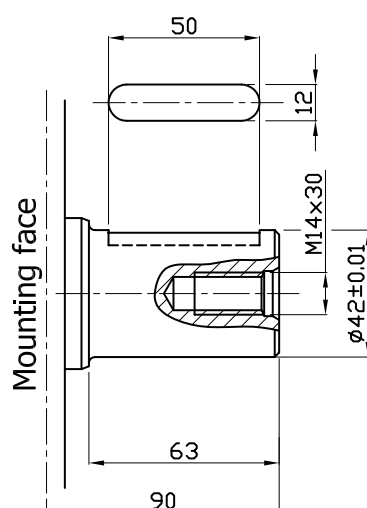


A22: Parallel shaft
on request

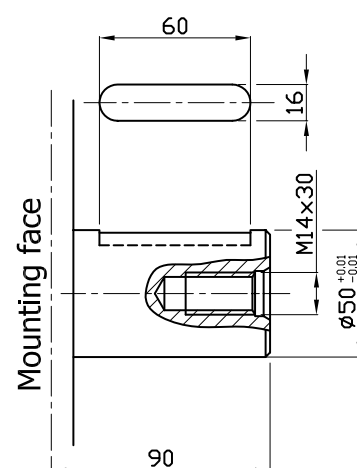




SIZE

IAM 800/N H3

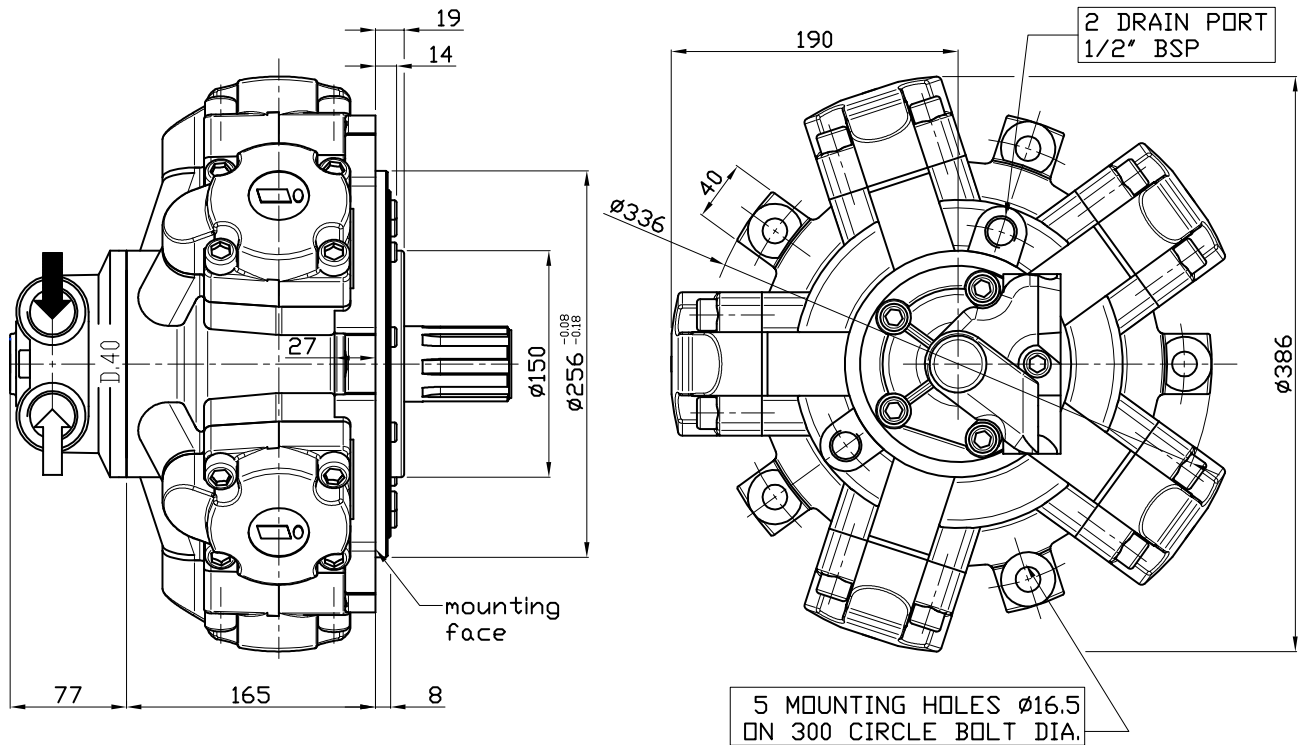

SHAFT



IAM 800/N H3

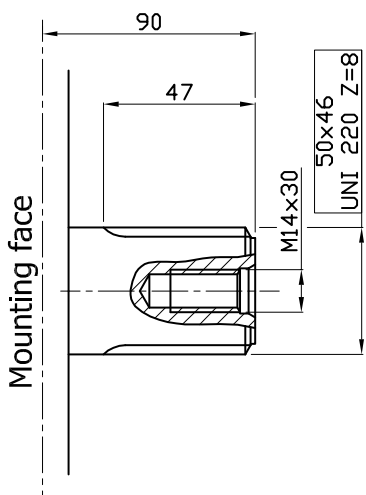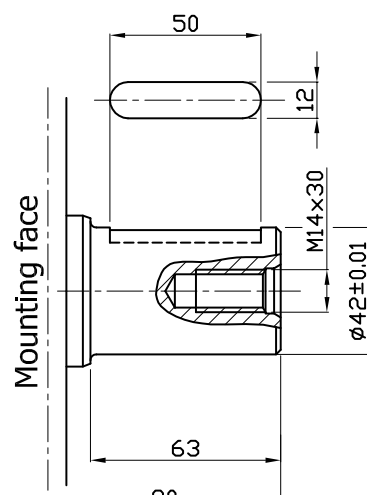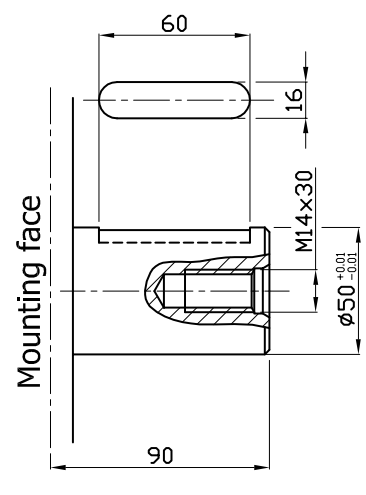A1: Standard splined shaft	A2: Parallel shaft on request	A22: Parallel shaft on request
 Technical drawing of the A1 standard splined shaft showing dimensions: 90, 47, 50x46 UNI 220 Z=8, M14x30, and Mounting face.	 Technical drawing of the A2 parallel shaft showing dimensions: 50, 12, 63, 90, 42±0.01, M14x30, and Mounting face.	 Technical drawing of the A22 parallel shaft showing dimensions: 60, 16, 90, 50±0.01, M14x30, and Mounting face.

INTERCHANGEABLE WITH GM3

SIZE


IAM 400/GM3 450/GM3 500/GM3 600/GM3 700/GM3 H3

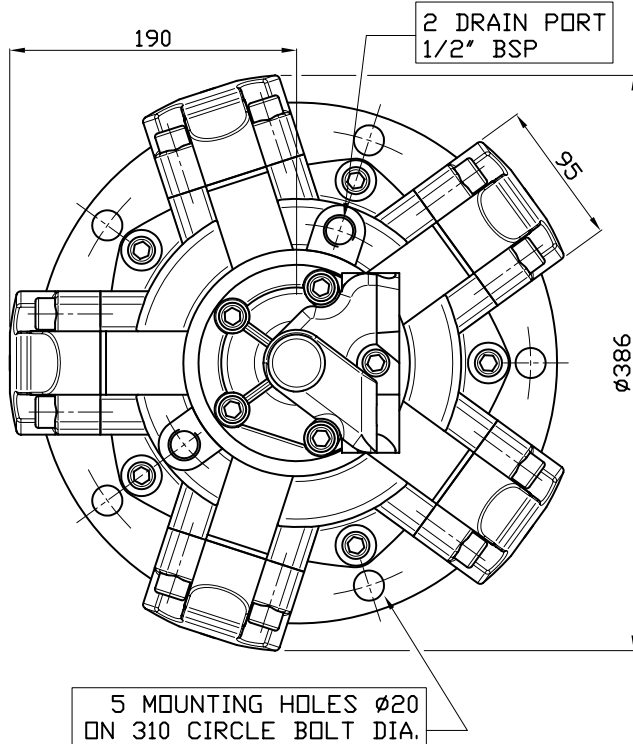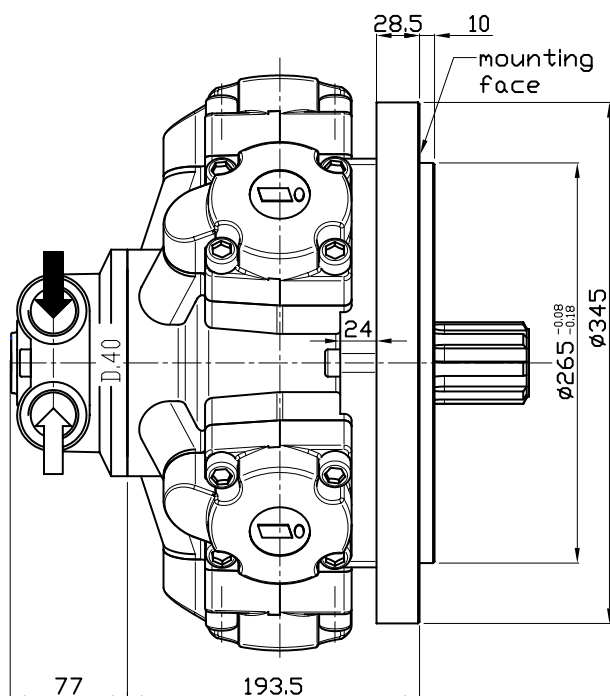


SHAFT

IAM 400/GM3 450/GM3 500/GM3 600/GM3 700/GM3 H3

A0: Standard splined shaft

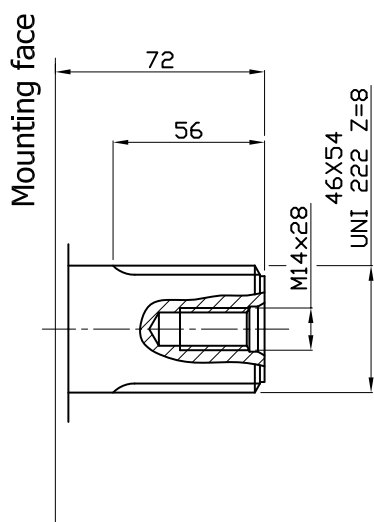


A3: Female shaft on request

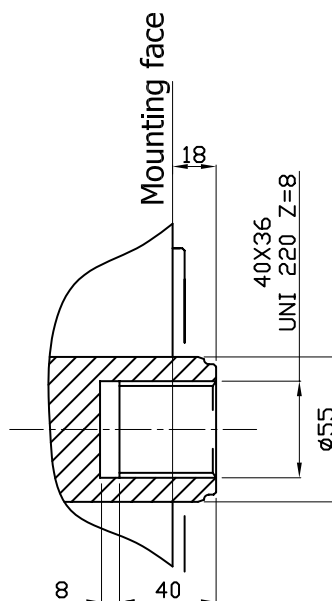

SIZE

INTERCHANGEABLE WITH M3

IAM 400/S 450/S 500/S 600/S 700/S H3


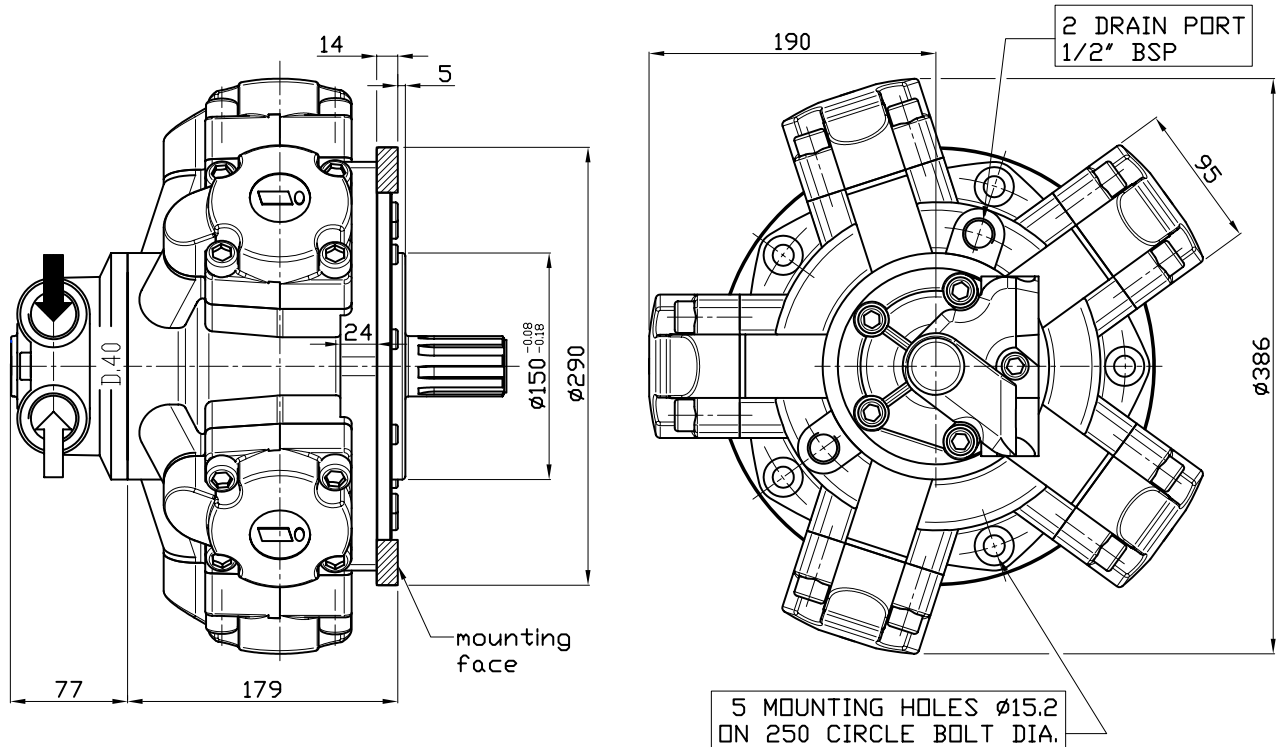


SHAFT

IAM 400/S 450/S 500/S 600/S 700/S H3

A0: Standard splined shaft





A3: Female shaft on request

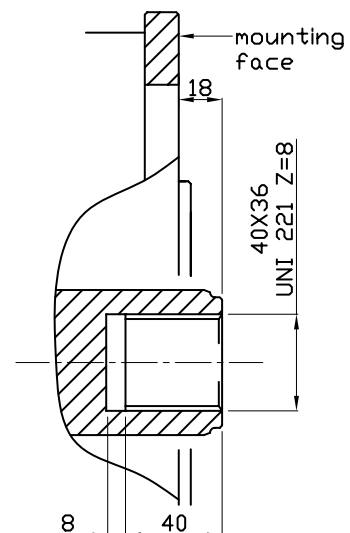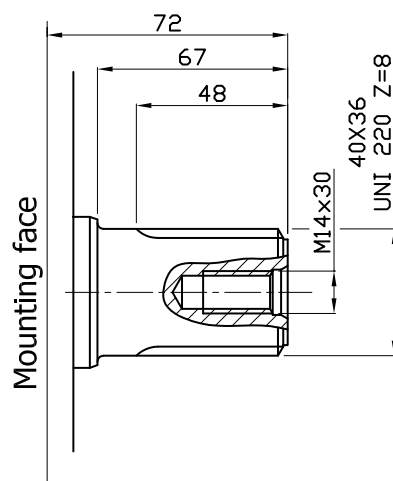

ORDERING INSTRUCTIONS





	IAM	- - -	- - -	H3	A -	D - -	- - -	SB -
Motor model	↑							
IAM								
Displacement		↑						
Interchangeability			↑					
	/C (450/C)							
	/B30 (450/B30)							
	/N							
	/GM3 /S							
Housing				↑				
Shaft					↑			
	A0 standard splined shaft							
	A1 special splined shaft							
	A2 parallel keyed shaft							
	A3 special female shaft							
	A.. other shaft							
Distributor								
	D31 (3/4" BSP)							
	D310 (1" BSP)							
	D40 (1" BSP)							
	D47 SAE CONFIGURATIONS							
Tachometer								
	TA							
	TB							
	EST							
	EST.30							
	J TACHOMETER PREDISPOSITION							
Spline billet								
	SB3 36x42 UNI 221							
	SB4 46x50 UNI 220							
	SB5 46x54 UNI 221							

EXAMPLE: IAM.400.H3.A0.D40
 IAM.450/C.H3.A1.D40.J.SB5
 IAM.500/GM3.H3.A0.D40.TA.SB5

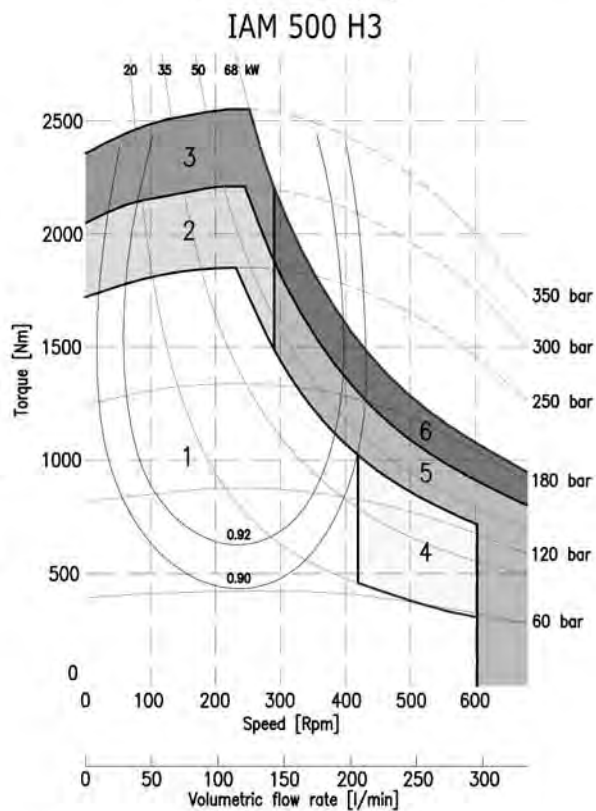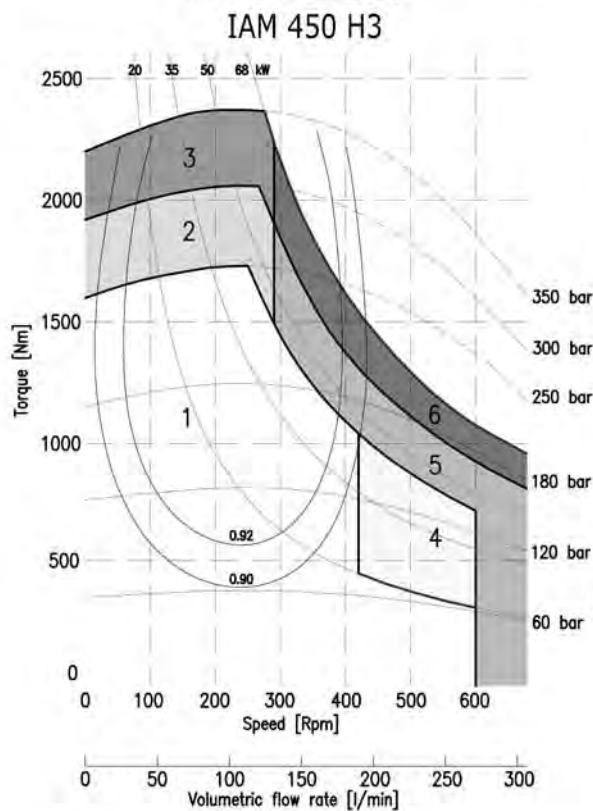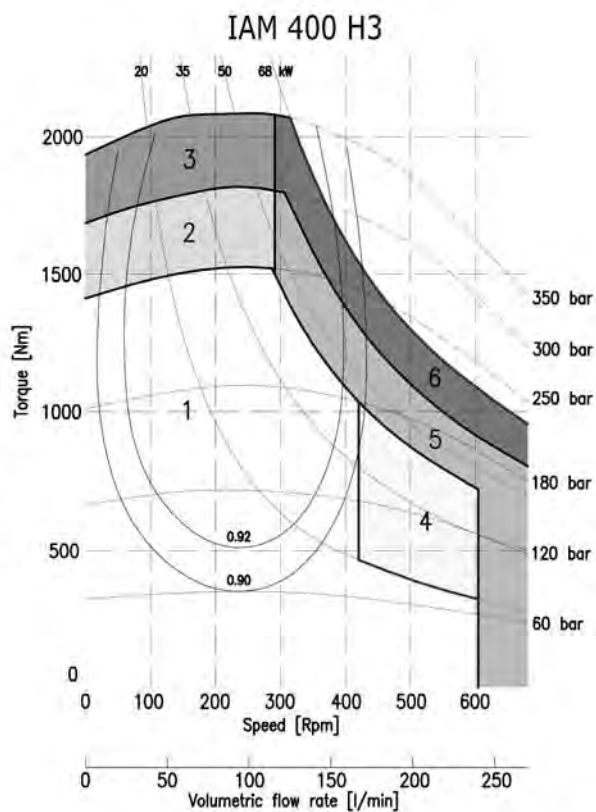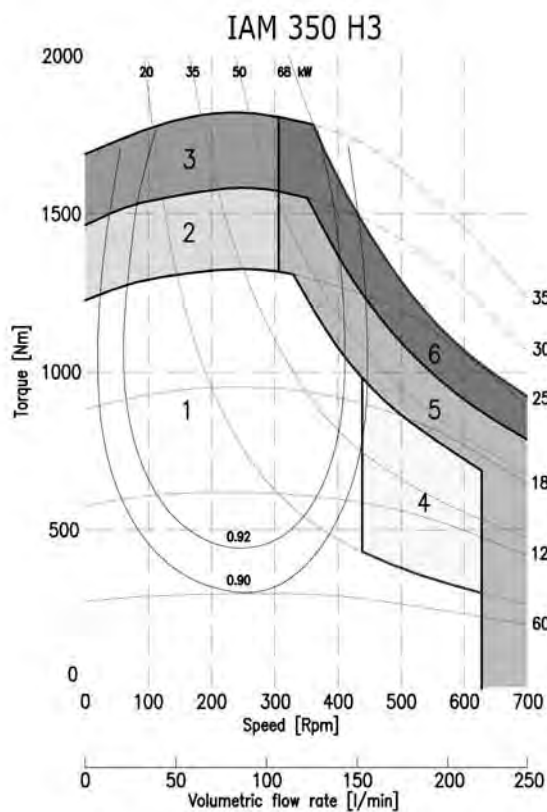

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

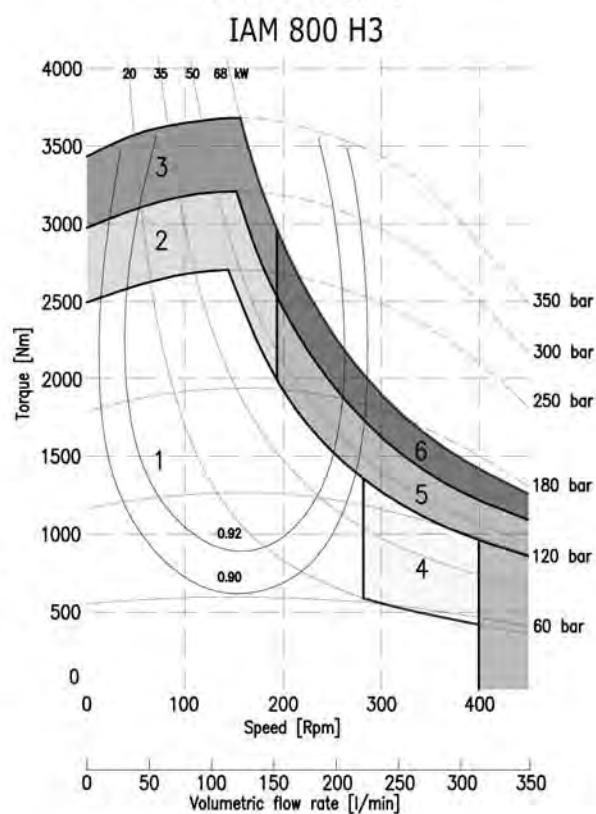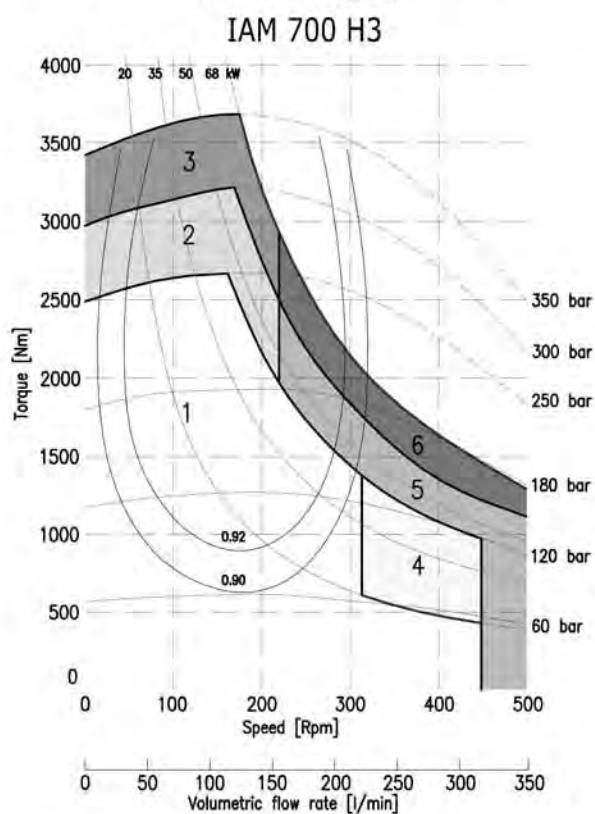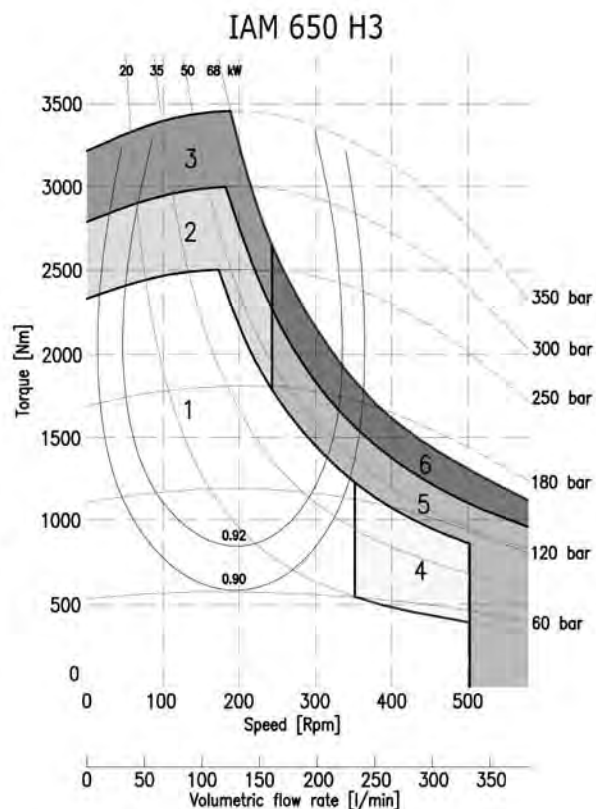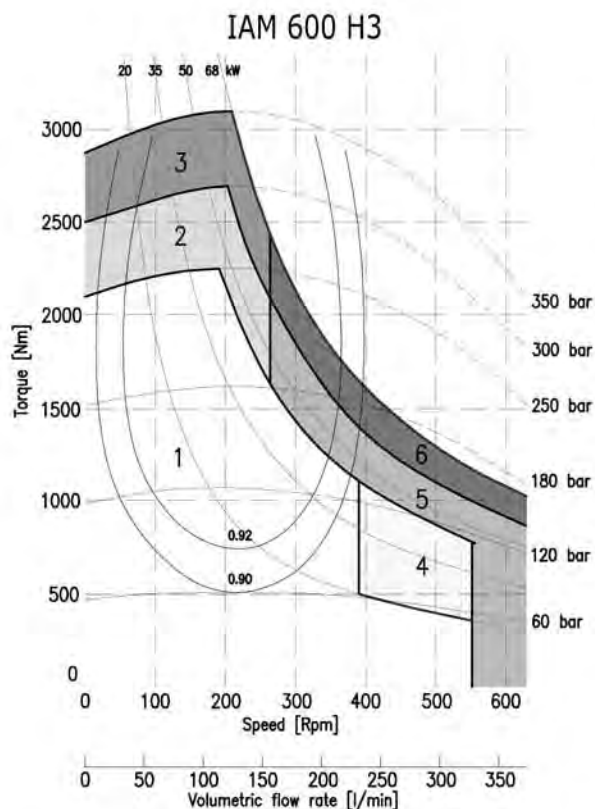

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H4 MODEL

***IAM 700-800-850-900
1000-1100-1200
1250-1400 H4***

IAM 700/C-800/C H4

IAM 800/B45 H4

***IAM 700-800-900
1000-1100-1250/S H4***

***IAM 700-800-900
1000-1100-1250/GM4 H4***

INDEX

TECHNICAL DATA - - - - -	Pag.	54
IAM H4 700-800-850-900-1000-1100-1200-1250-1400 - - - - -	"	55
IAM H4 700/C-800/C - - - - -	"	56
IAM H4 800/B45 - - - - -	"	57
IAM H4 700-800-900-1000-1100-1250/S - - - - -	"	58
IAM H4 700-800-900-1000-1100-1250/GM4- - - - -	"	59
ORDERING INSTRUCTIONS - - - - -	"	60
GRAPHIC PERFORMANCES H4 700-800-850-900 - - - - -	"	61
GRAPHIC PERFORMANCES H4 1000-1100-1200-1250 - - - - -	"	62
GRAPHIC PERFORMANCES H4 1400 - - - - -	"	63

TECHNICAL DATA

H4

MODEL		IAM 700 H4	IAM 800 H4	IAM 850 H4	IAM 900 H4	IAM 1000 H4	IAM 1100 H4	IAM 1200 H4	IAM 1250 H4	IAM 1400 H4
Displacement	cc/rev	714	792	847	904	992	1116	1192	1247	1332
Specific Torque	Nm/bar	11.4	12.6	13.5	14.4	15.8	17.8	19.0	19.8	21.2
Max cont. Pressure	bar	250	250	250	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350	350	350	350
Max continuous speed	rpm	500	450	450	450	330	330	300	250	200
Peak speed	rpm	580	530	530	530	400	400	350	300	250
Max continuous power	HP	75	75	75	75	75	75	75	75	75
	kW	55	55	55	55	55	55	55	55	55
Max power	HP	107	107	107	107	107	107	107	107	107
	kW	80	80	80	80	80	80	80	80	80


- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 92 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 1 rpm
- Flushing flow^(*):

IAM H4 700 – 800 – 850 – 900	10 l/min
IAM H4 1000 – 1100 – 1200 – 1250	10 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 700-800-850-900-1000-1100-1200-1250-1400 H4

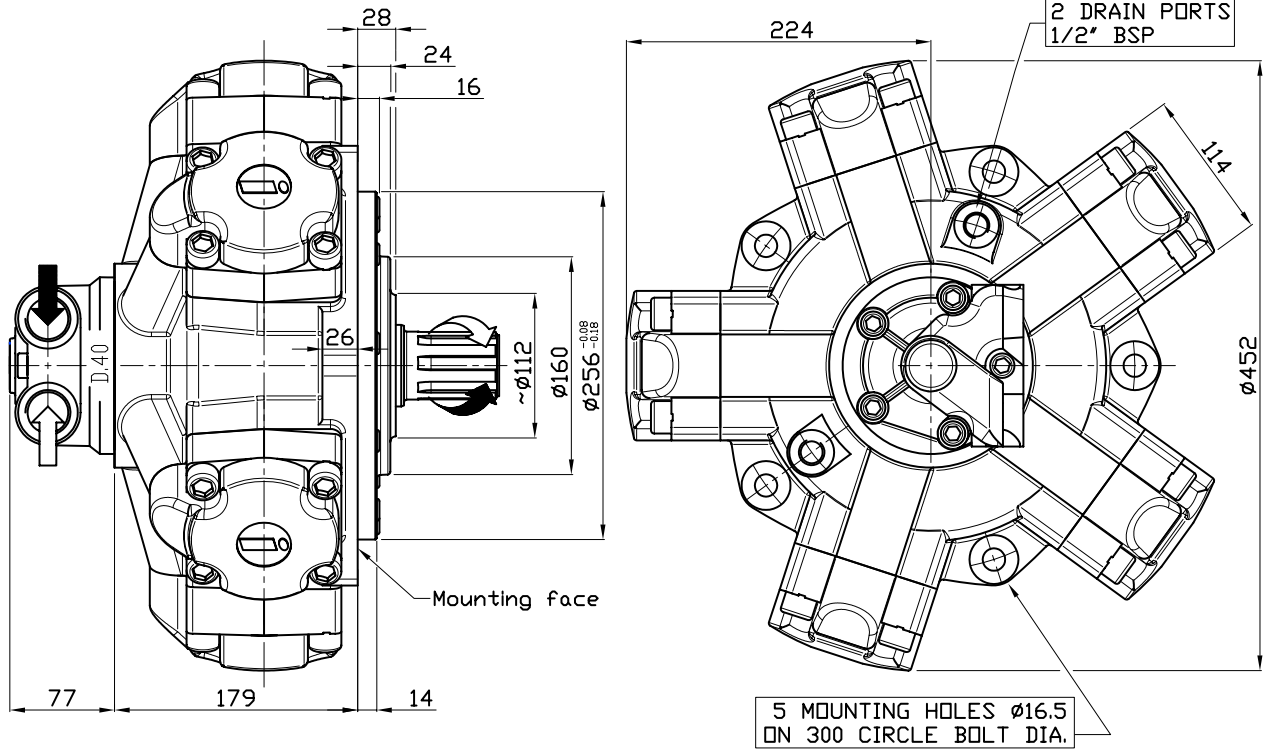


SHAFT

IAM 700-800-850-900-1000-1100-1200-1250-1400 H4


A0: Standard splined shaft

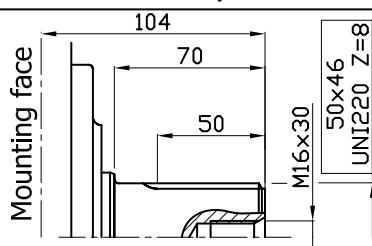


A1: Splined shaft on request

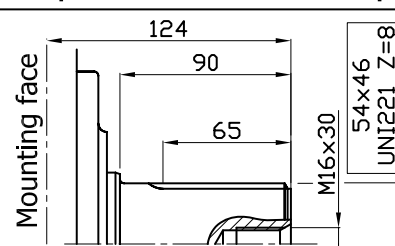

A2: Parallel shaft on request

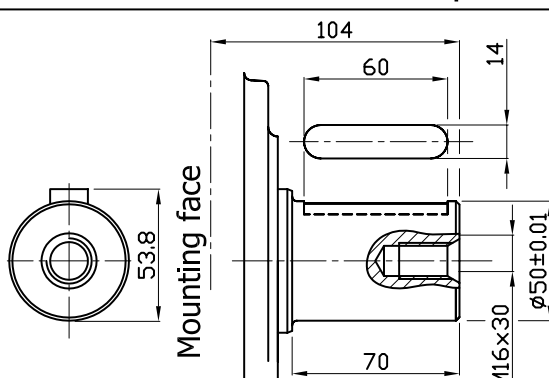


A3: Female shaft on request

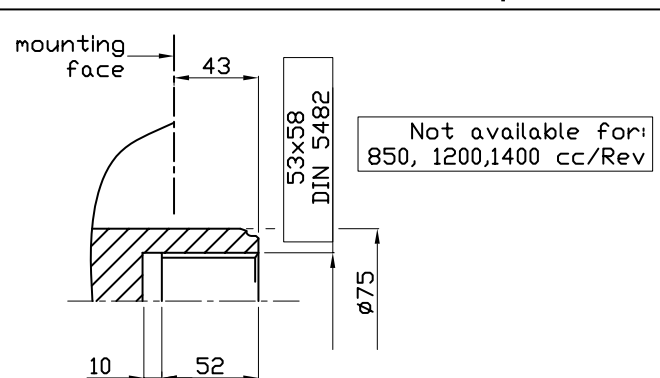

SIZE


IAM 700/C-800/C H4

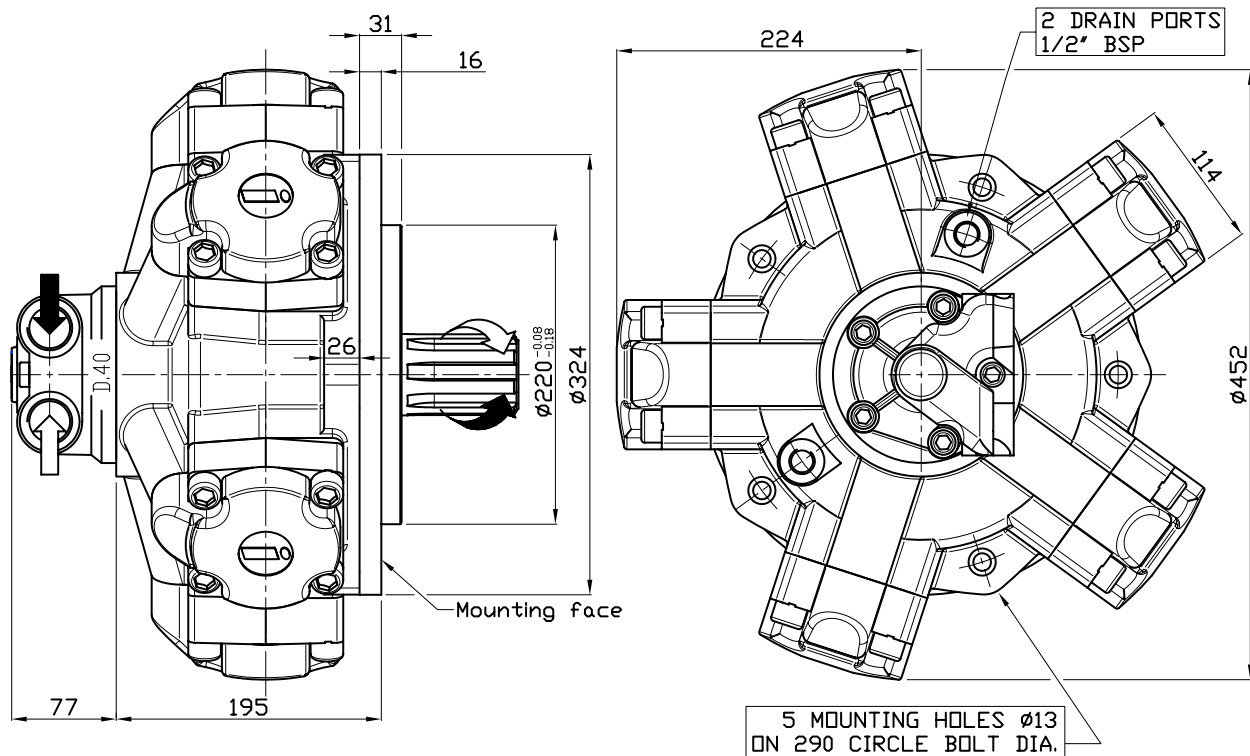


SHAFT & OPTION

IAM 700/C-800/C H4


A0: Standard splined shaft



A2: Parallel shaft
on request




A3: Female shaft
on request




FL2: connection block

Connection block, fitting D47 distributor, for motor MR 350/450/500/600/700/800

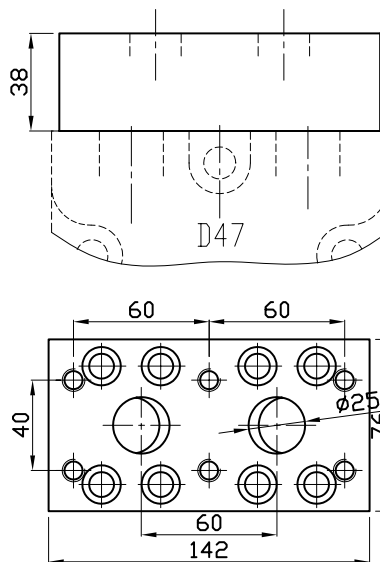

SIZE


IAM 700/S 800/S 900/S 1000/S 1100/S 1250/S H4

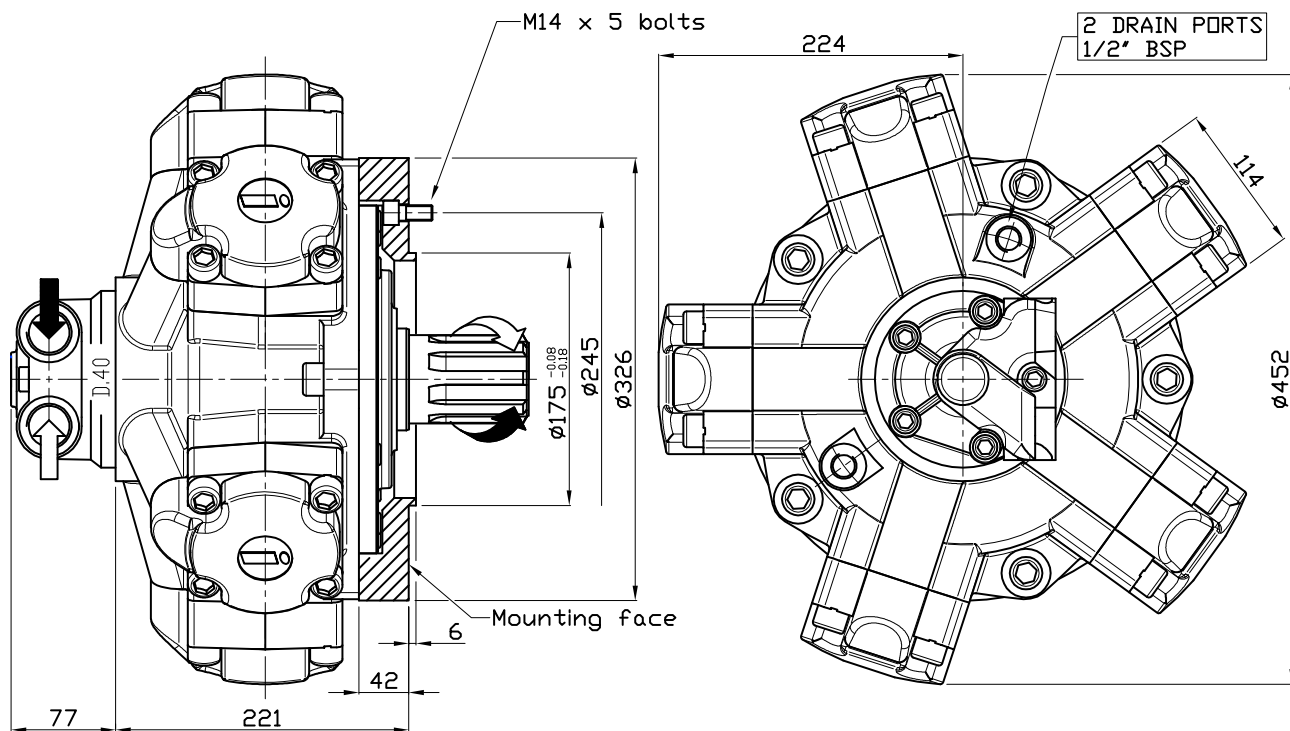


SHAFT

IAM 700/S 800/S 900/S 1000/S 1100/S 1250/S H4

A0: Standard splined shaft

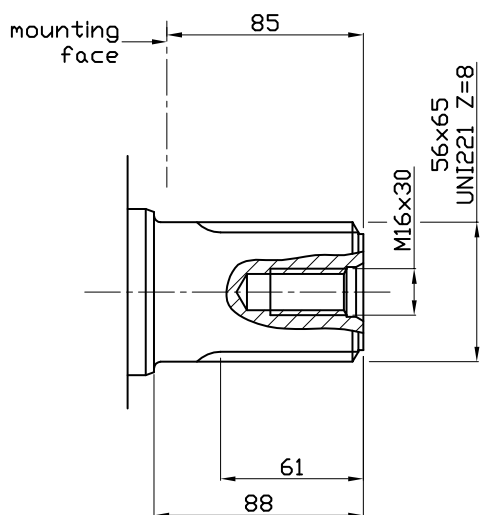


A3: Female shaft on request

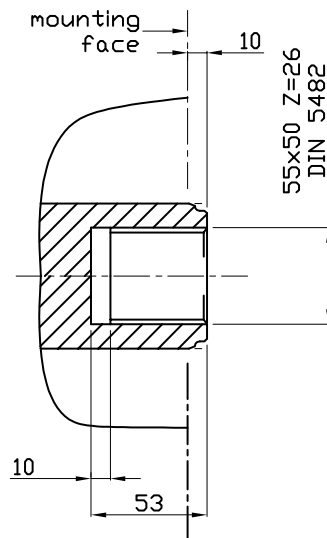

SIZE


IAM 700/GM4 800/GM4 900/GM4 1000/GM4 1100/GM4 1250/GM4 H4

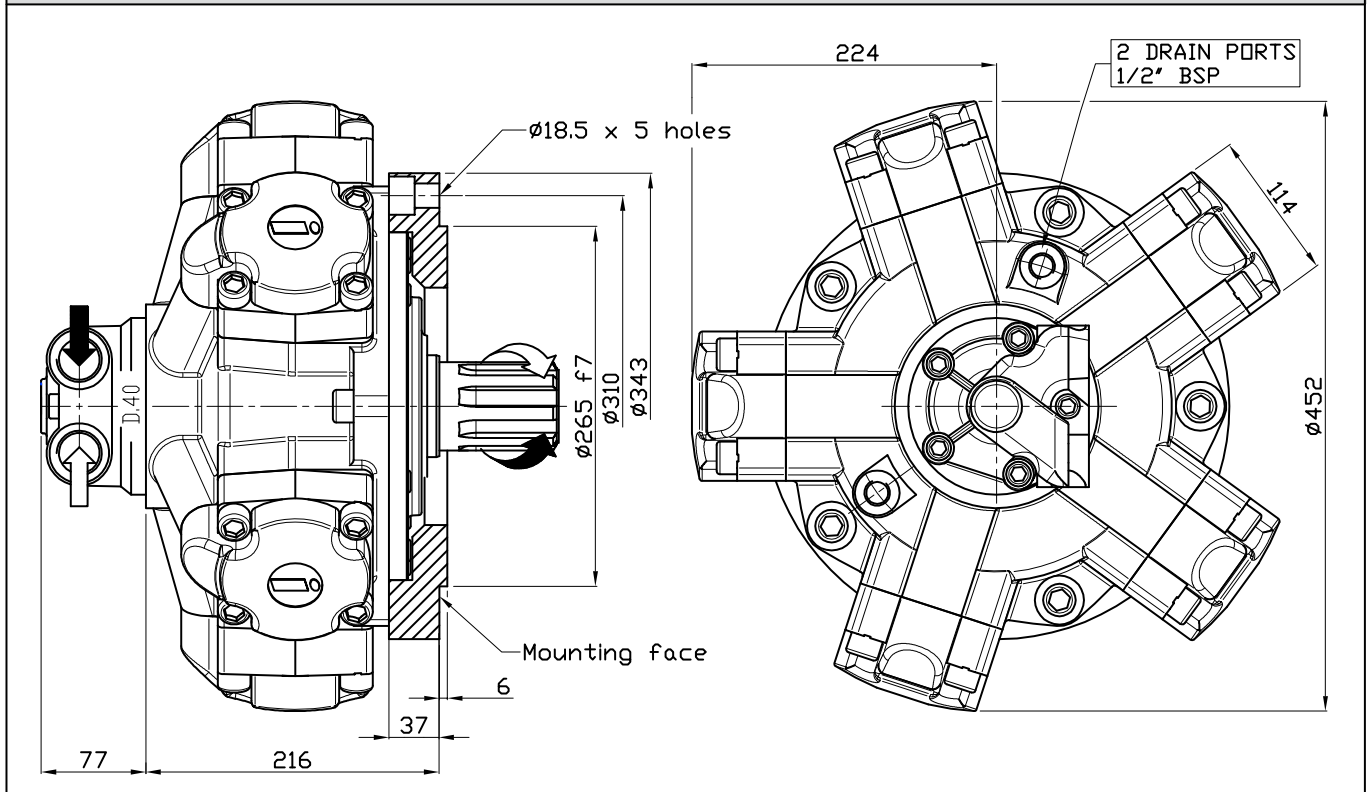

SHAFT

IAM 700/GM4 800/GM4 900/GM4 1000/GM4 1100/GM4 1250/GM4 H4





A0: Standard splined shaft

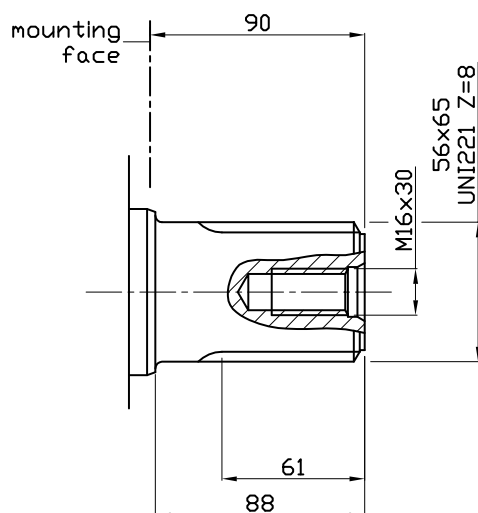

ORDERING INSTRUCTIONS





	IAM	- - -	- - -	H4	A -	D - -	- - -	SB -
Motor model	↑							
IAM								
Displacement		↑						
Interchangeability			↑					
/C (700/C, 800/C) /B45 (800/B45) /GM4 /S								
Housing				↑				
Shaft					↑			
A0 standard splined shaft A1 special splined shaft A2 parallel keyed shaft A3 special female shaft A.. other shaft								
Distributor								
D31 (3/4" BSP) D310 (1" BSP) D40 (1" BSP) D47 SAE CONFIGURATIONS BSP THREAD CONFIGURATIONS								
Tachometer								
TA TB EST EST.30 J TACHOMETER PREDISPOSITION								
Spline billet								
SB4 46x50 UNI 220 SB5 46x54 UNI 221 SB16 52x60 UNI 222								

EXAMPLE: IAM.700.H4.A1.D40.SB5
 IAM.800/B45.H4.A1.D31.TA
 IAM.700/C.H4.A0.D40.J.SB16

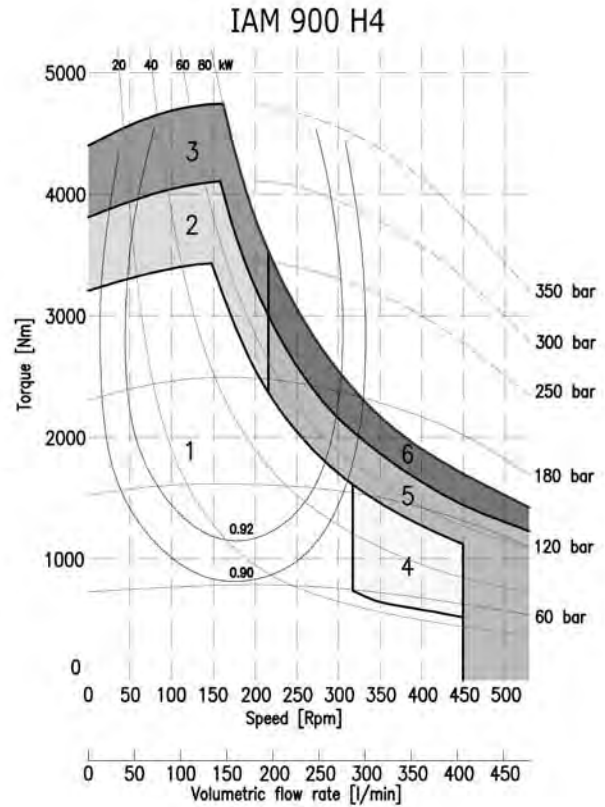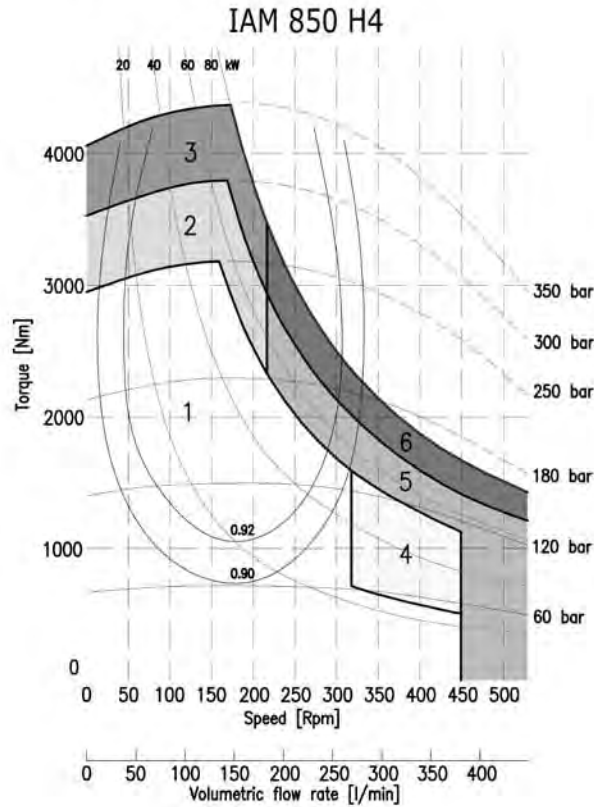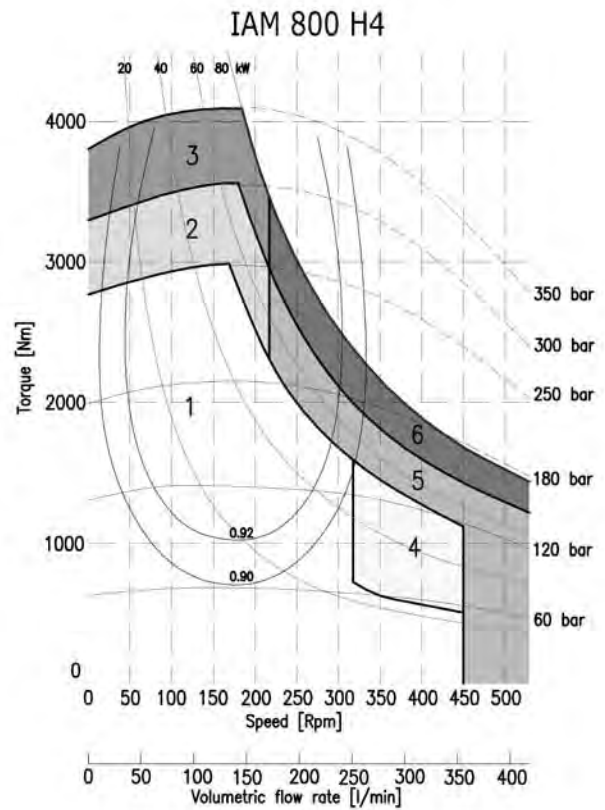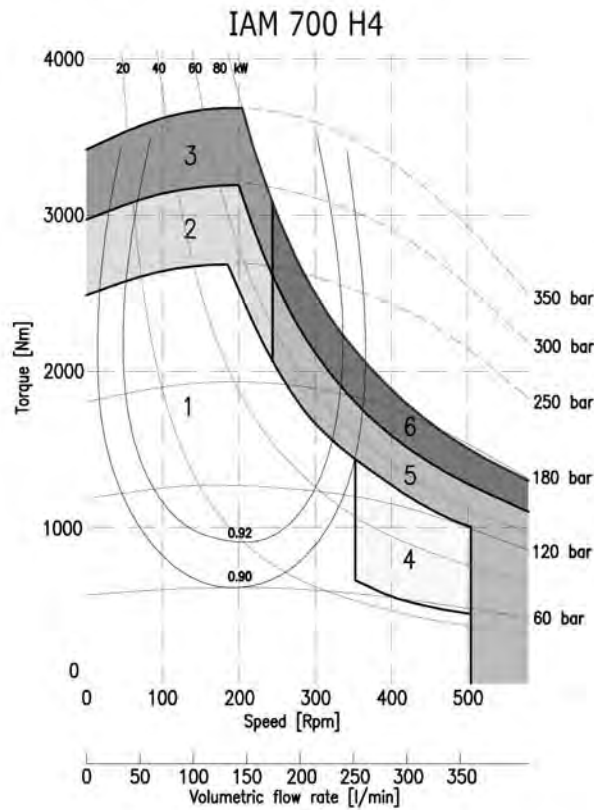


1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

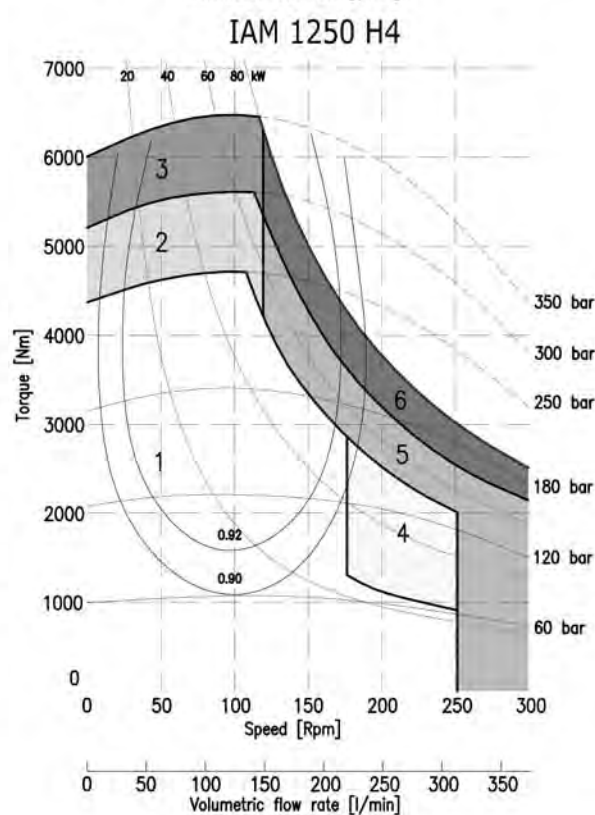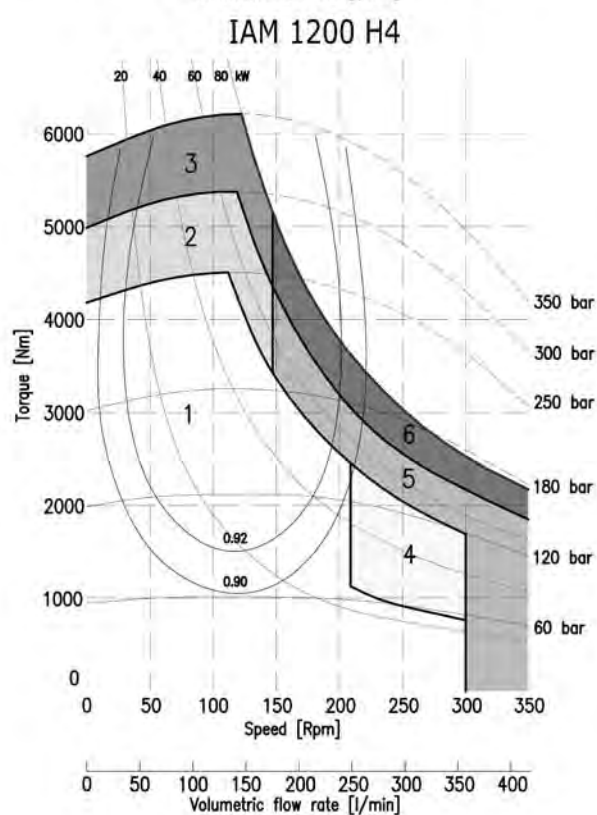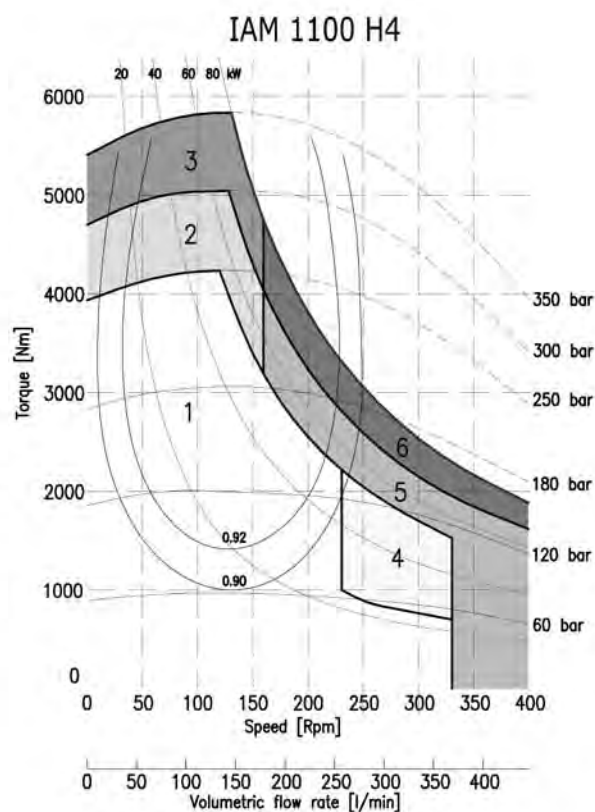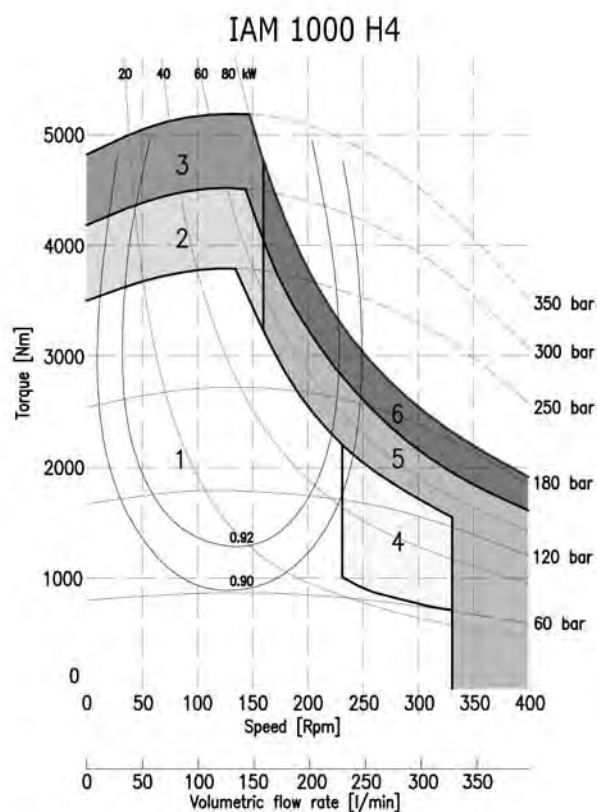

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

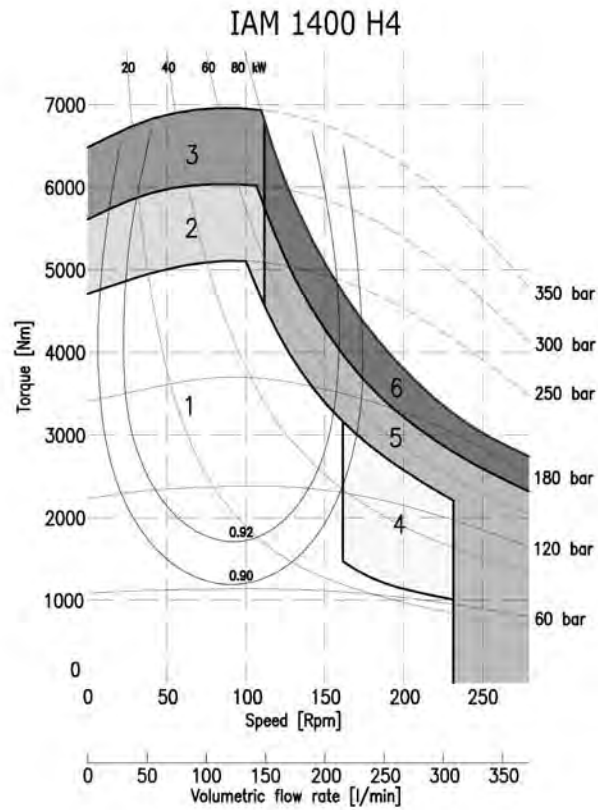

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H45 MODEL

***IAM 1100-1400-1600
1800 H45***

IAM 1100-1400/C H45

INDEX

TECHNICAL DATA - - - - -	<i>Pag.</i>	66
IAM H45 1100-1400-1600-1800 - - - - -	"	67
IAM H45 1100-1400/C - - - - -	"	68
ORDERING INSTRUCTIONS - - - - -	"	69
GRAPHIC PERFORMANCES H45 1100-1400-1600-1800 - - - - -	"	70

TECHNICAL DATA *H45*


MODEL		IAM 1100 H45	IAM 1400 H45	IAM 1600 H45	IAM 1800 H45
Displacement	cc/rev	1183	1376	1648	1815
Specific Torque	Nm/bar	18.8	21.9	26.2	28.9
Max cont. Pressure	bar	250	250	250	250
Max int. Pressure	bar	300	300	300	300
Peak pressure	bar	350	350	350	350
Max continuous speed	rpm	350	300	275	250
Peak speed	rpm	400	350	325	300
Max continuous power	HP	116	116	116	116
	kW	85	85	85	85
Max power	HP	161	161	161	161
	kW	120	120	120	120

- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 118 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 0.5 rpm
- Flushing flow: 10 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM H45 1100-1400-1600-1800

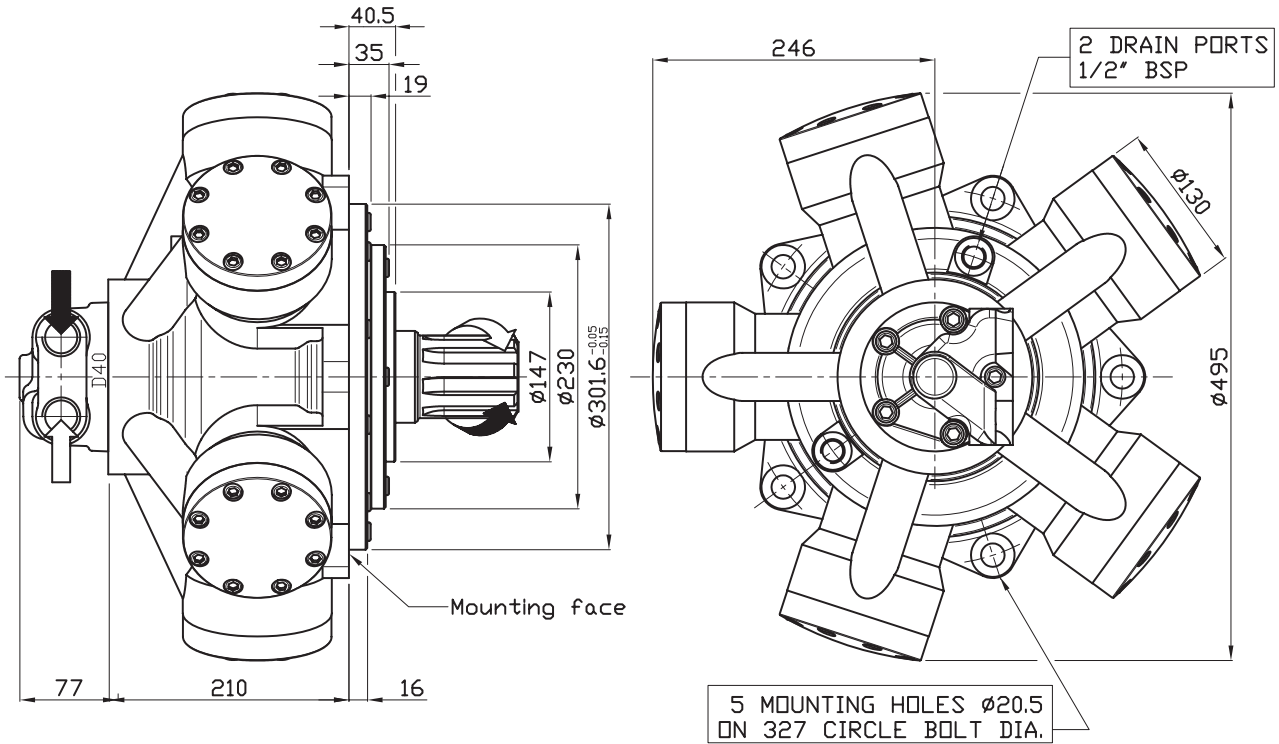


SHAFT

IAM H45 1100-1400-1600-1800

A0: Standard splined shaft

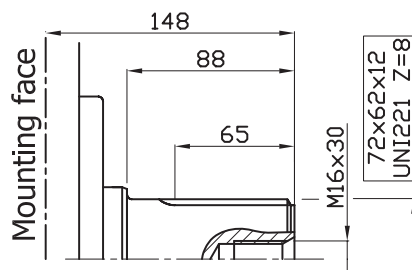


A1: Splined shaft on request

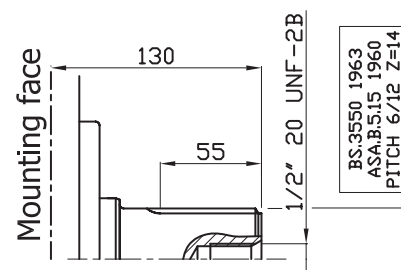

SIZE


IAM H45 1100/C -1400/C

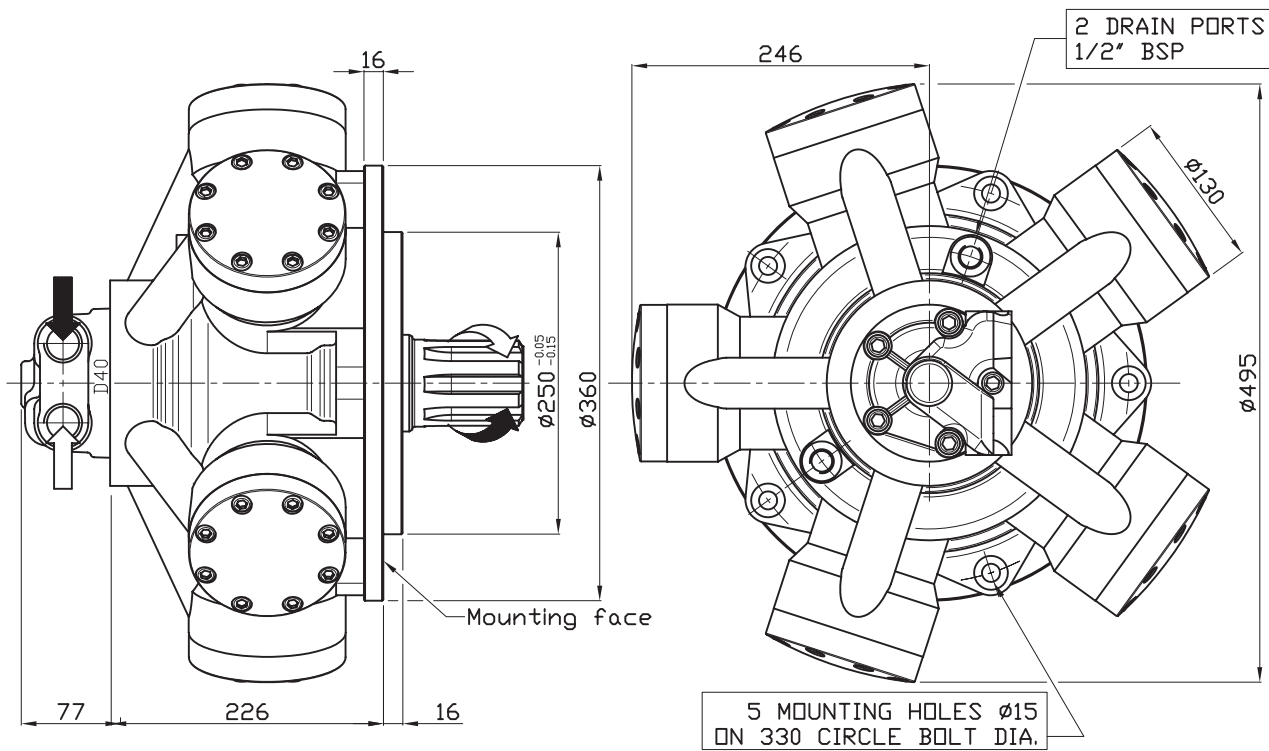

SHAFT & OPTION


IAM H45 1100/C -1400/C

A0: Standard splined shaft

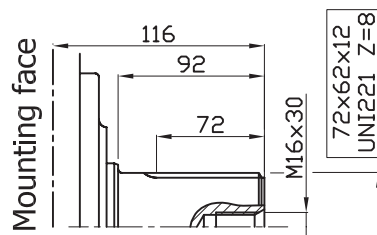


FL3: connection block





Connection block, fitting D55 distributor, for motor MR 1100/1400/1600/1800/2100

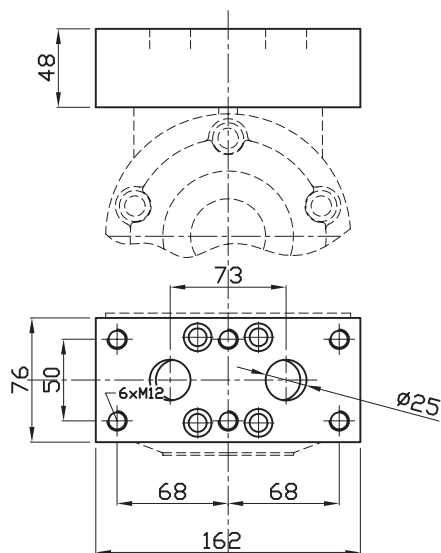

ORDERING INSTRUCTIONS

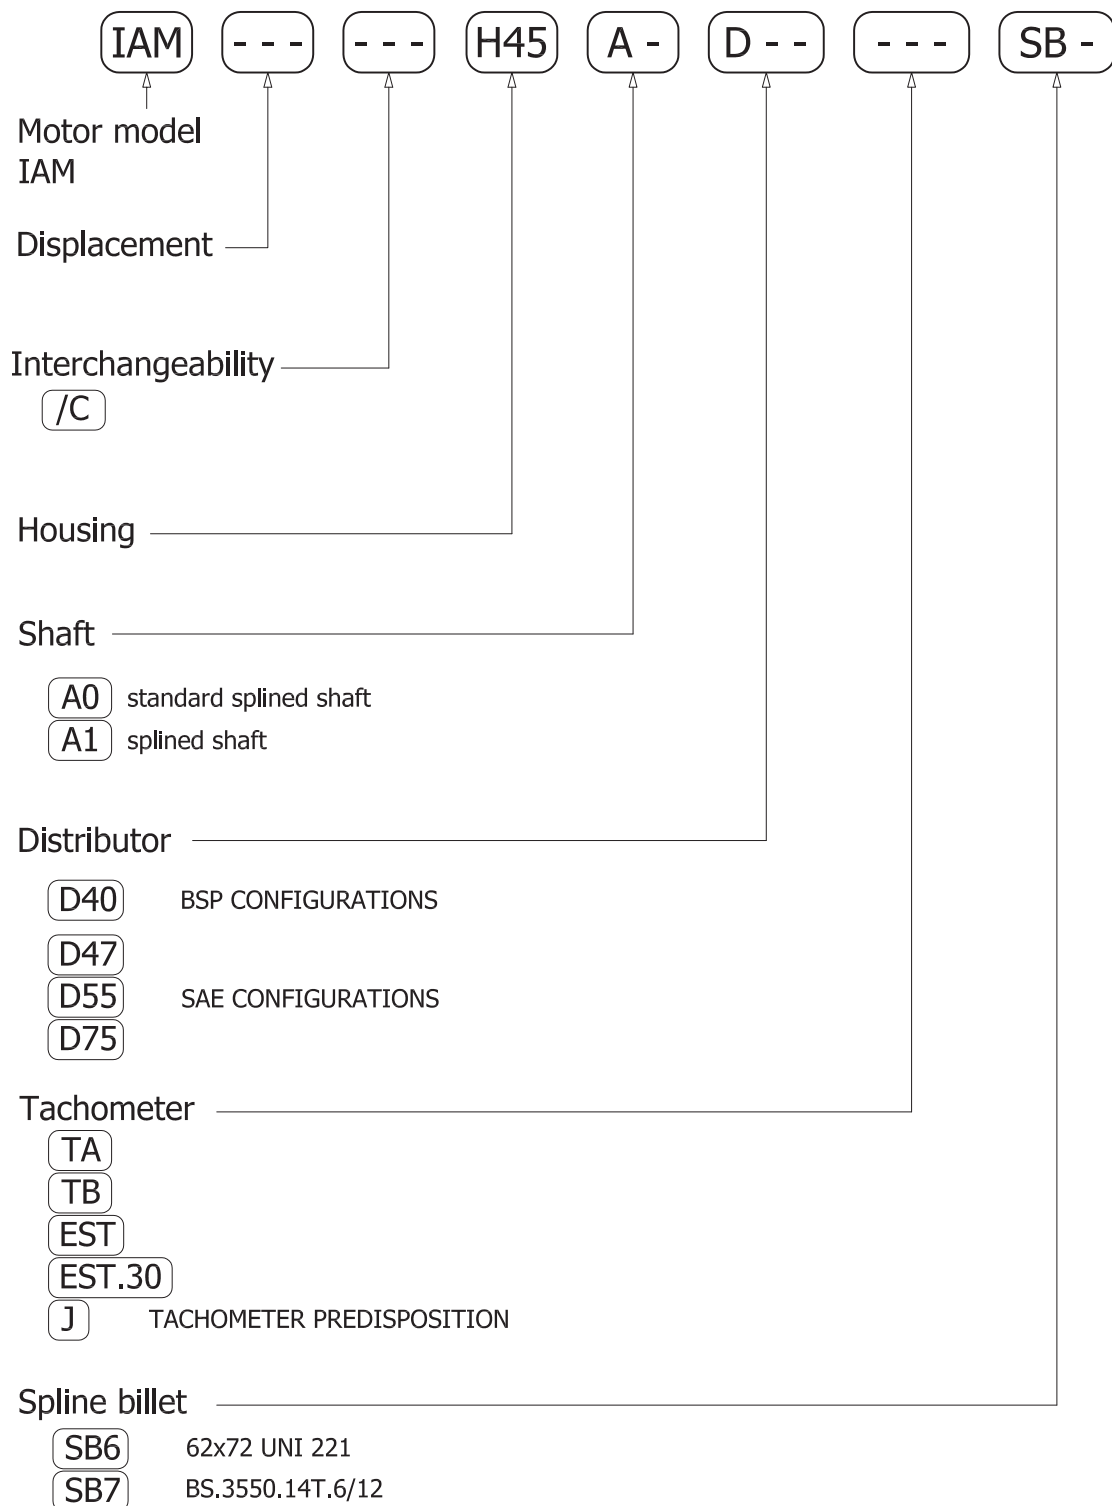

EXAMPLE: IAM.1100/C.H45.A0.D40
 IAM.1400.H45.A1.D55.TA.SB6
 IAM.1600.H45.A0.D40

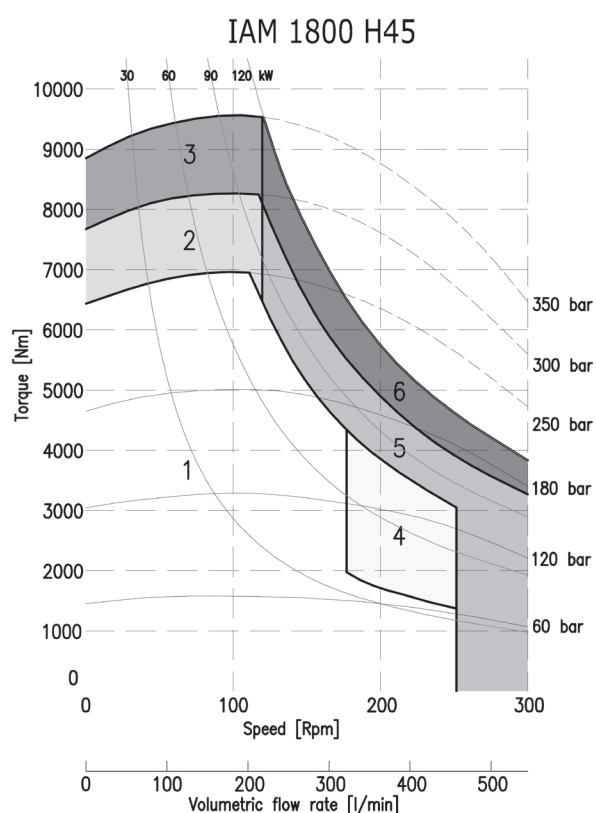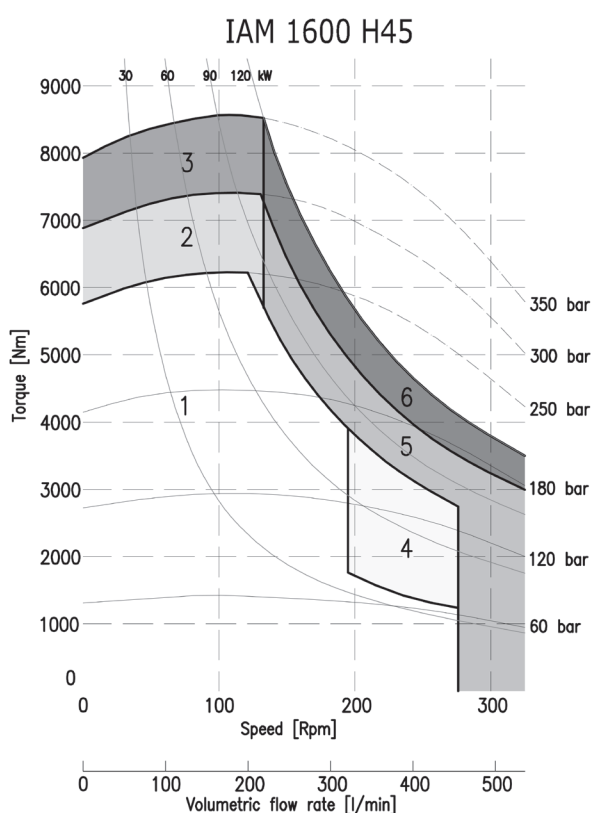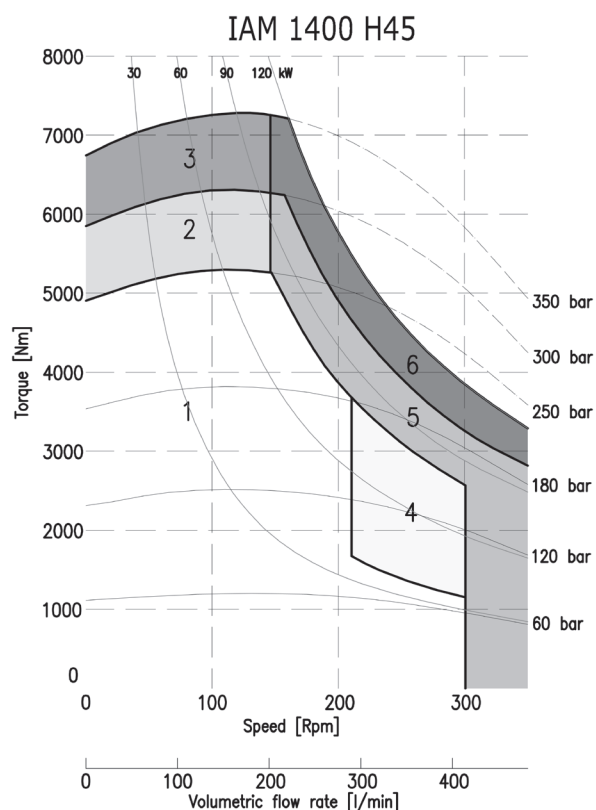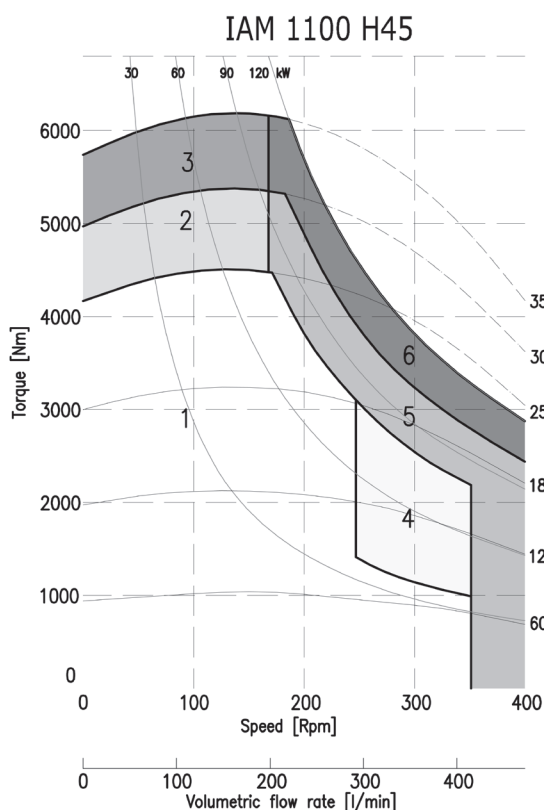

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H5 MODEL

***IAM 1000-1200-1400
1500-1600-1800
2000-2200 H5***

IAM 1200-1400-1500/C H5

***IAM 1600-1800-2000
2200/C H5***

***IAM 1000/B60 - 1400/B80
1600/B100 H5***

***IAM 1000-1200-1400
1500-1600-1800
2000-2200 H5***

INDEX

TECHNICAL DATA - - - - -	<i>Pag.</i>	72
IAM H5 1000-1200-1400-1500-1600-1800-2000-2200 - - - - -	"	73
IAM H5 1200-1400-1500/C - - - - -	"	74
IAM H5 1600-1800-2000-2200/C - - - - -	"	75
IAM H5 1000/B60-1400/B80-1600/B100 - - - - -	"	76
IAM H5 1000-1200-1400-1500-1600-1800-2000-2200/GM5 (S) - - - - -	"	77
ORDERING INSTRUCTIONS - - - - -	"	78
GRAPHIC PERFORMANCES H5 1000-1200-1400-1500 - - - - -	"	79
GRAPHIC PERFORMANCES H5 1600-1800-2000-2200 - - - - -	"	80

TECHNICAL DATA

H5


MODEL		IAM 1000 H5	IAM 1200 H5	IAM 1400 H5	IAM 1500 H5	IAM 1600 H5	IAM 1800 H5	IAM 2000 H5	IAM 2200 H5
Displacement	cc/rev	1094	1231	1376	1528	1648	1815	2035	2220
Specific Torque	Nm/bar	17.4	19.6	21.9	24.3	26.2	28.9	32.4	35.3
Max cont. Pressure	bar	250	250	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350	350	350
Max continuous speed	rpm	350	300	300	300	300	250	230	220
Peak speed	rpm	400	350	350	350	340	300	260	240
Max continuous power	HP	122	122	122	122	122	122	122	122
	kW	90	90	90	90	90	90	90	90
Max power	HP	161	161	161	161	161	161	161	161
	kW	120	120	120	120	120	120	120	120

- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 173 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 0.5 rpm
- Flushing flow: 10 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 1000-1200-1400-1500-1600-1800-2000-2200 H5

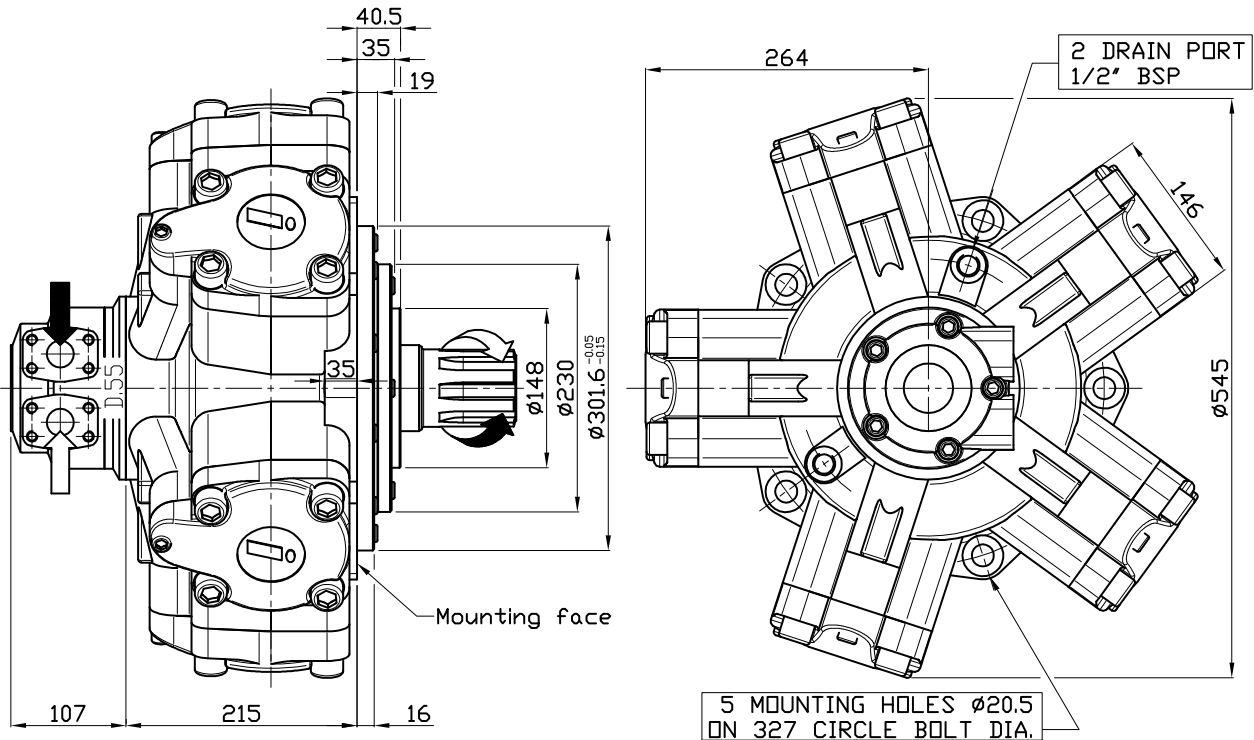


SHAFT

IAM 1000-1200-1400-1500-1600-1800-2000-2200 H5


A0: Standard splined shaft

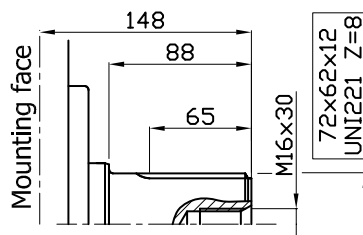


A1: Splined shaft on request



A2: Parallel shaft on request

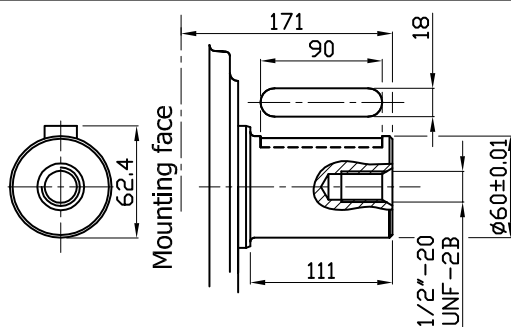


A3: Female shaft on request

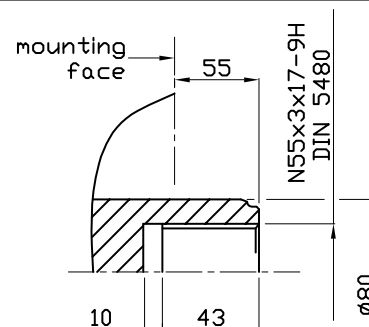






SIZE

IAM 1200/C-1400/C-1500/C H5

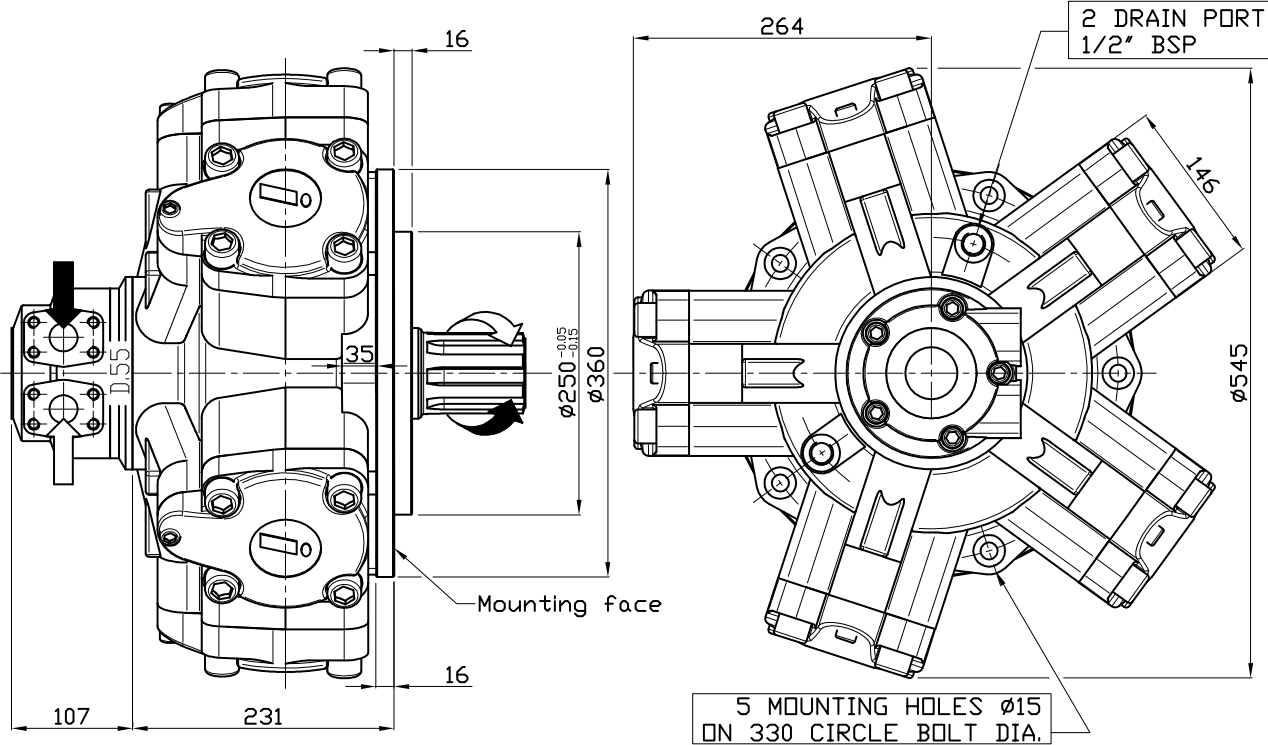


SHAFT & OPTION

IAM 1200/C-1400/C-1500/C H5

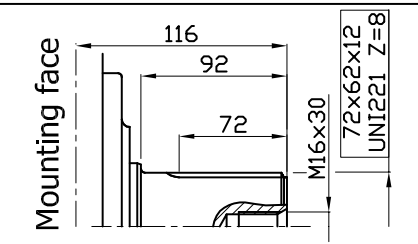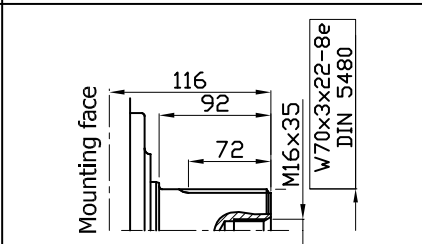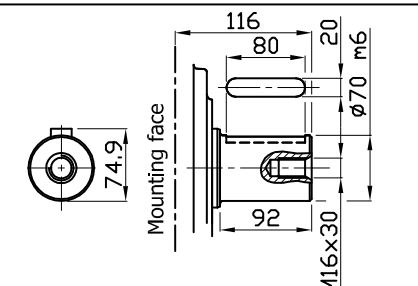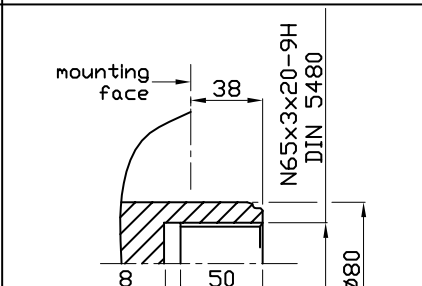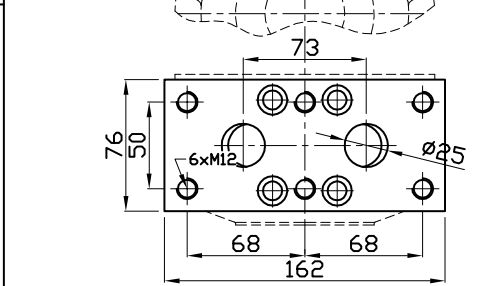A0: Standard splined shaft	A1: Splined shaft on request	FL3: connection block
		Connection block, fitting D55 distributor, for motor MR 1100/1400/1600/1800/2100
A2: Parallel shaft on request	A3: Female shaft on request	
		




SIZE

IAM 1600/C-1800/C-2000/C-2200/C H5

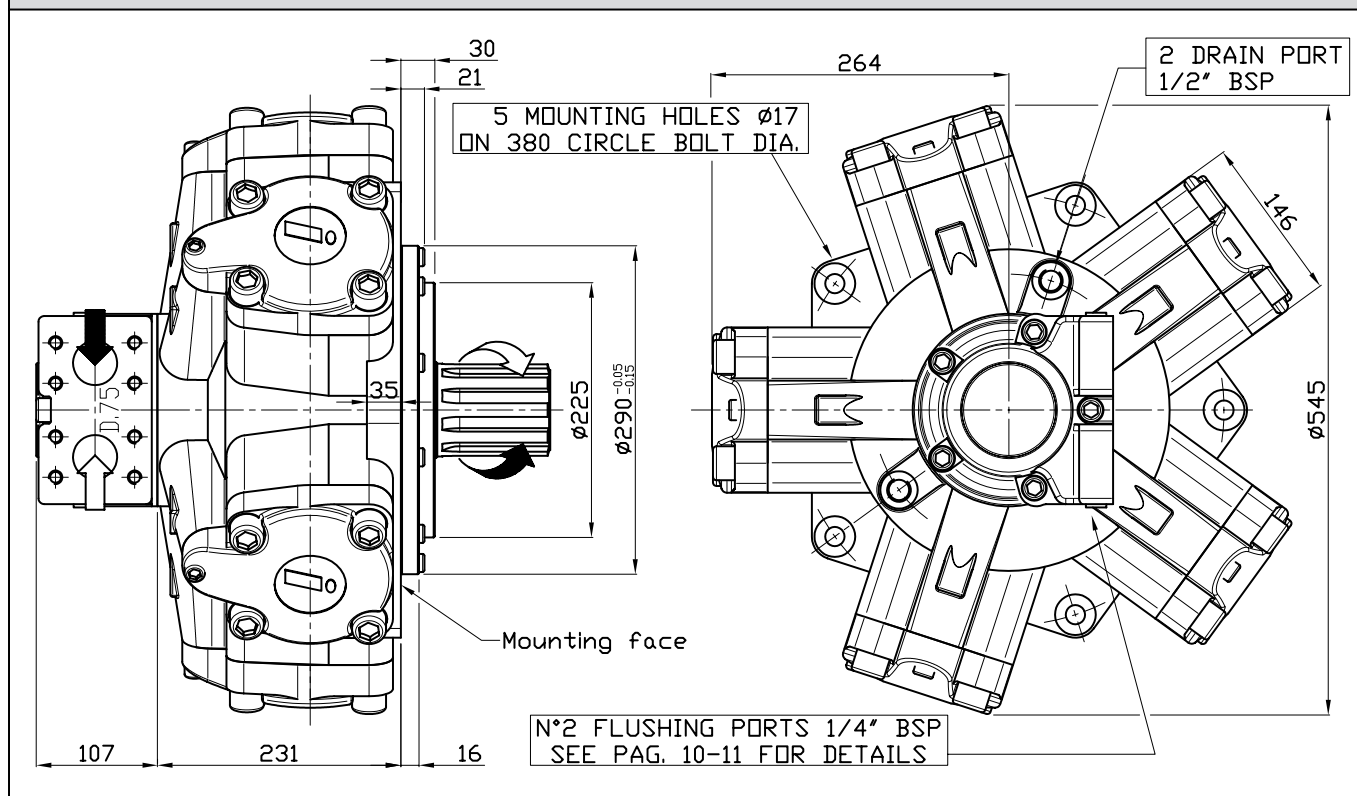


SHAFT & OPTION

IAM 1600/C-1800/C-2000/C-2200/C H5

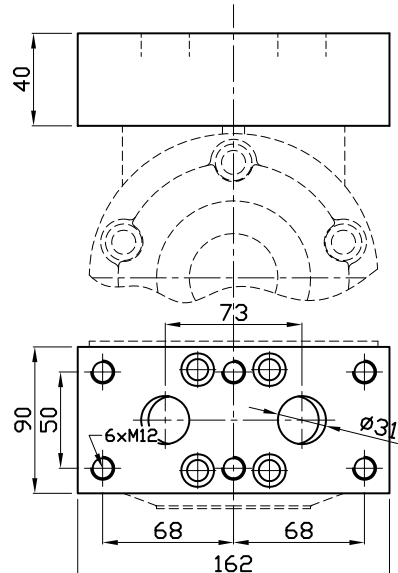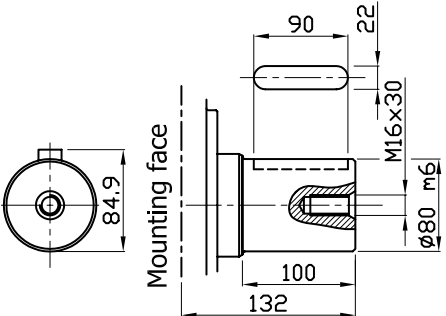A0: Standard splined shaft	FL4: connection block
 Technical drawing of the standard splined shaft (A0) showing dimensions: - Mounting face: 132 (total length), 100 (flange thickness), 80 (flange thickness) - Shaft: 82x72x12 (splined shaft dimensions), UNI222 Z=10 (splined shaft dimensions), M16x30 (flange dimensions)	Connection block, fitting D75 distributor, for motor MR 1100/1400/1600/1800/2100  Technical drawing of the connection block (FL4) showing dimensions: - Top flange: 40 (total width), 73 (flange thickness) - Mounting face: 73 (flange thickness), 162 (total width) - Shaft: 73 (flange thickness), 162 (total width), $\phi 31$ (shaft diameter) - Drain port: 2 DRAIN PORT 1/2" BSP
A2: Parallel shaft on request	
 Technical drawing of the parallel shaft (A2) showing dimensions: - Mounting face: 84.9 (total length), 100 (flange thickness), 132 (flange thickness) - Shaft: 90 (splined shaft dimensions), 22 (splined shaft dimensions), M16x30 (flange dimensions), $\phi 80$ m6 (flange dimensions)	







SIZE

IAM 1000/B60-1400/B80-1600/B100 H5

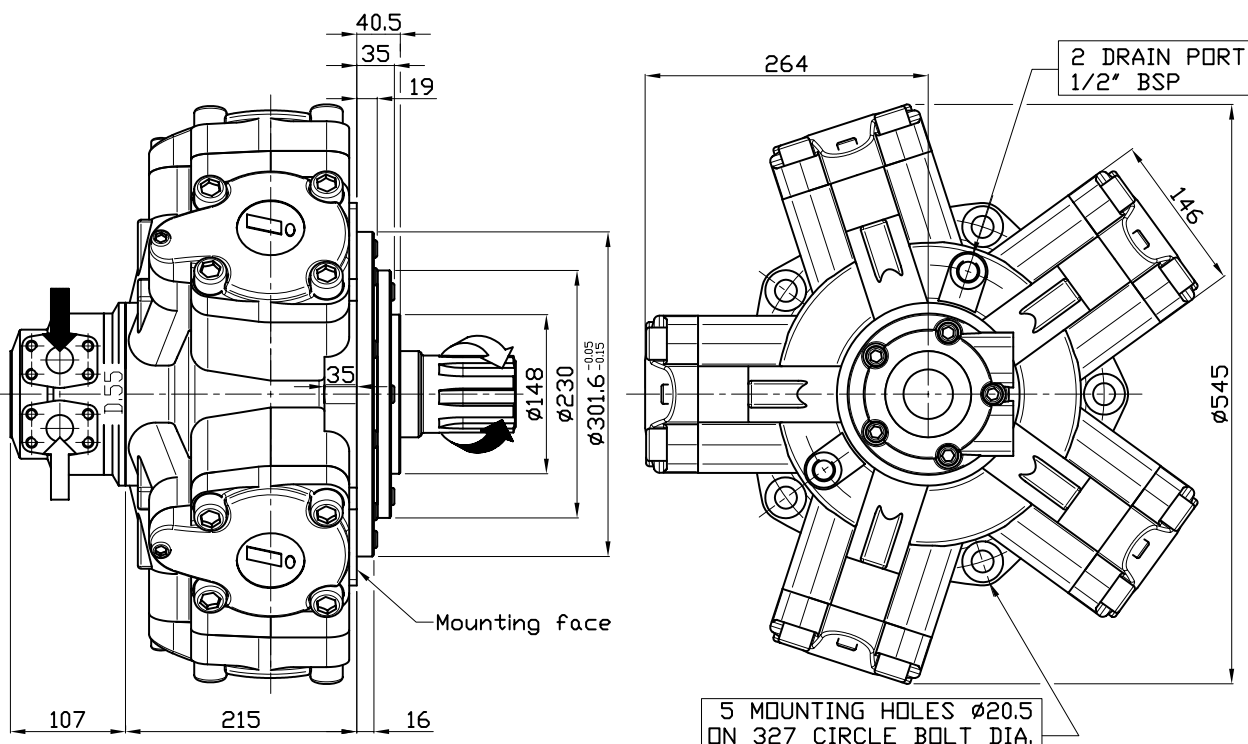


SHAFT & OPTION

IAM 1000/B60-1400/B80-1600/B100 H5

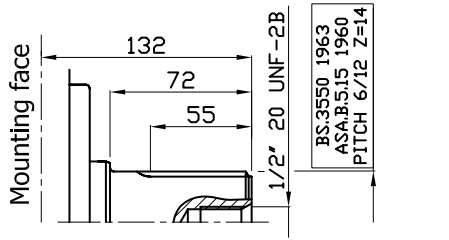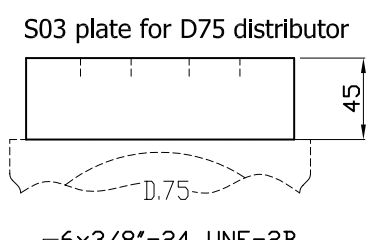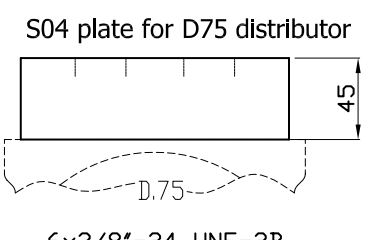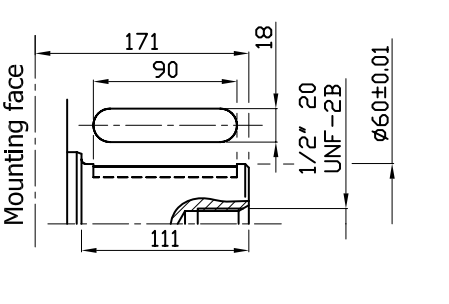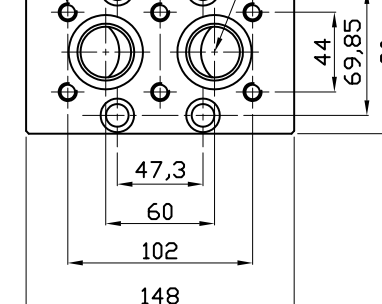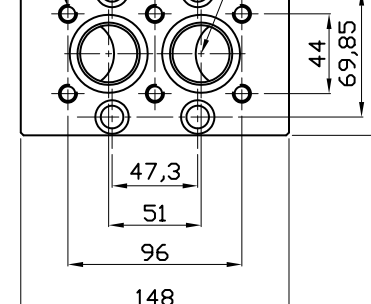A1: Standard splined shaft	FL5: connection block	FL6: connection block
 Mounting face 132 72 55 1 1/2" 20 UNF-2B BS.3550 1963 ASA.B.5.15 1960 PITCH 6/12 Z=14	 S03 plate for D75 distributor 45 D.75	 S04 plate for D75 distributor 45 D.75
A2: Parallel shaft on request		
 Mounting face 171 90 18 1 1/2" 20 UNF-2B 111 $\phi 60 \pm 0.01$	 6x3/8"-24 UNF-2B 4x$\phi 12.5$ 2x$\phi 28$ 44 69.85 90 47.3 60 102 148	 6x3/8"-24 UNF-2B 4x$\phi 12.5$ 2x$\phi 31.5$ 44 69.85 90 47.3 51 96 148

SIZE


IAM H5 1000/GM5-1200/GM5-1400/GM5-1500/GM5
1600/GM5-1800/GM5-2000/GM5-2200/GM5 (S)

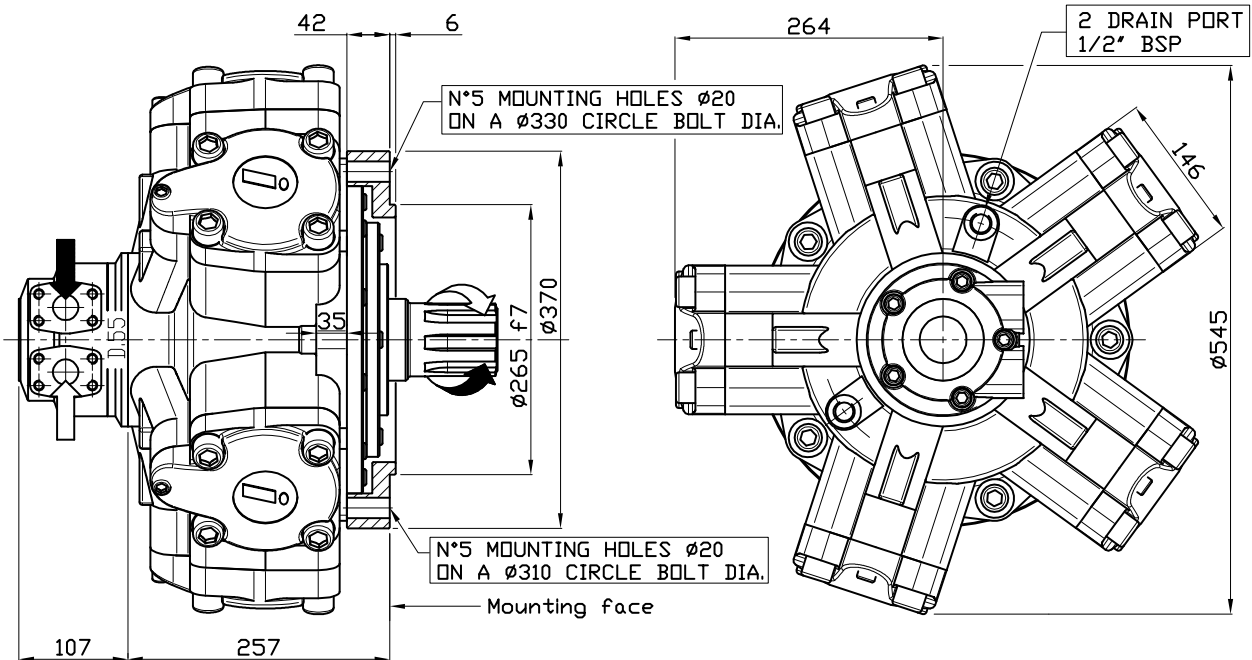

SHAFT

IAM H5 1000/GM5-1200/GM5-1400/GM5-1500/GM5
1600/GM5-1800/GM5-2000/GM5-2200/GM5 (S)





A0: Standard splined shaft

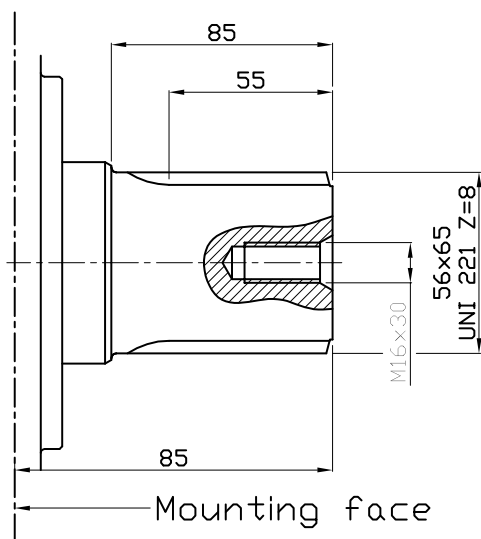

ORDERING INSTRUCTIONS

	IAM	- - -	- - -	H5	A -	D - -	- - -	SB -
Motor model	↑							
IAM								
Displacement		↑						
Interchangeability			↑					
	/C	(1200/C, 1400/C, 1500/C) (1600/C, 1800/C, 2000/C, 2200/C)						
	/B60	(1000/B60)						
	/B80	(1400/B80)						
	/B100	(1600/B100)						
	/GM5	/S						
Housing	↑							
Shaft	↑							
	A0	standard splined shaft						
	A1	splined shaft						
	A2	parallel keyed shaft						
	A3	special female shaft						
	A11	splined shaft						
	A..	other shaft						
Distributor	↑							
	D55							
	D75	SAE CONFIGURATIONS						
Tachometer	↑							
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet	↑							
	SB6	62x72 UNI 221						
	SB7	BS.3550.14T.6/12						
	SB8	72x82 UNI 222						
	SB17	56x65 UNI 221						


EXAMPLE: IAM.1200.H5.A1.D55
IAM.1600.H5.A0.D75.TA.SB6
IAM.1800/C.H5.A0.D75.EST30.SB8

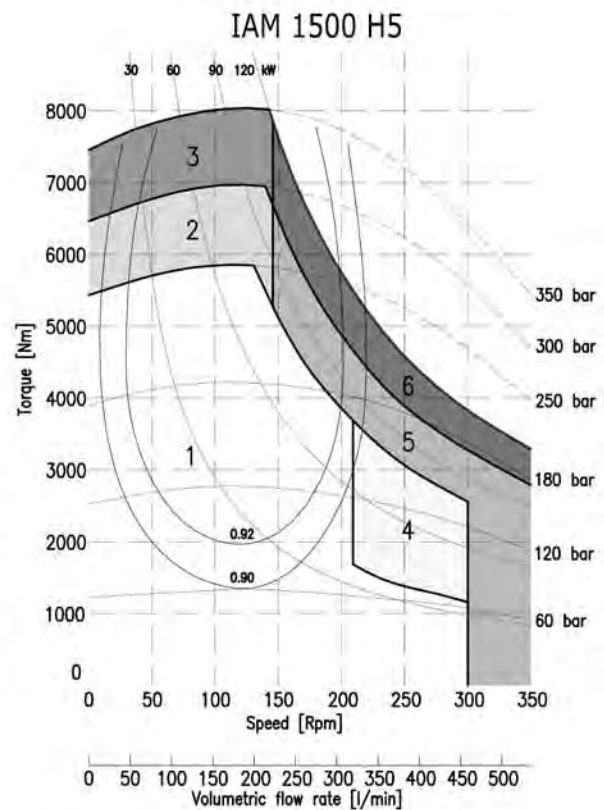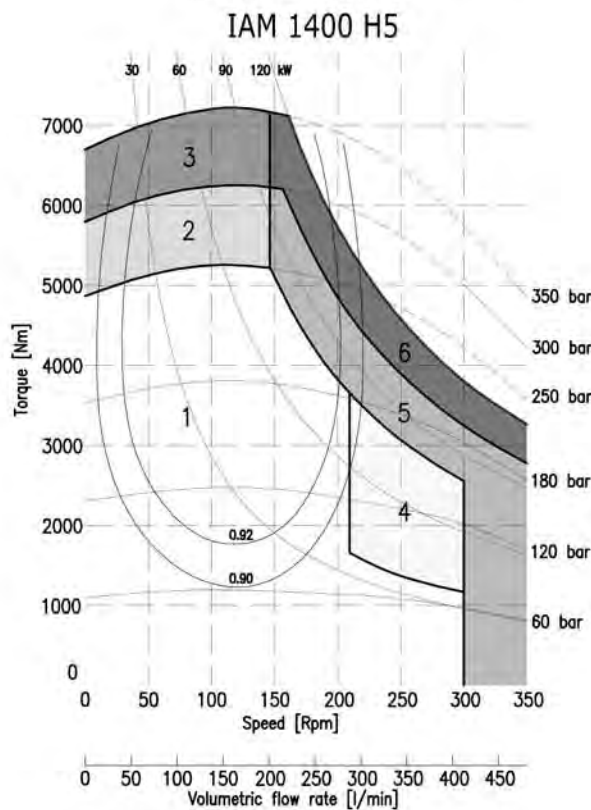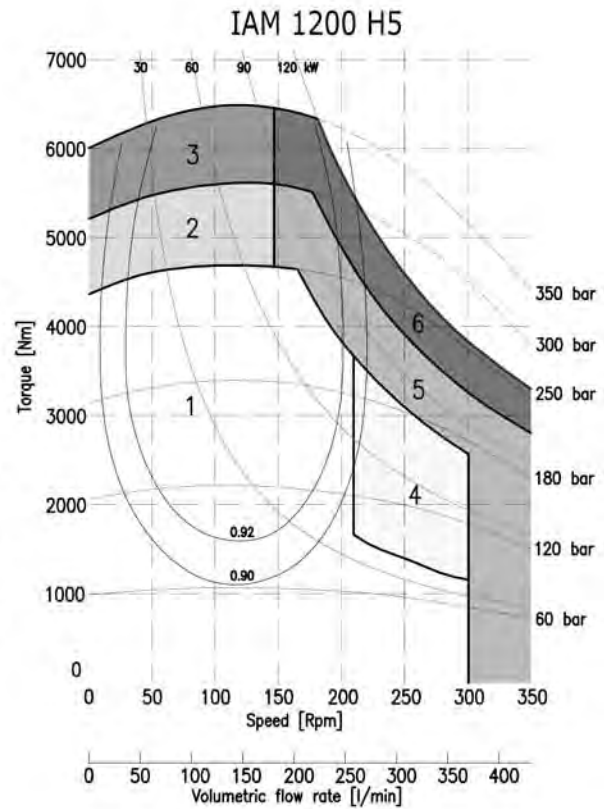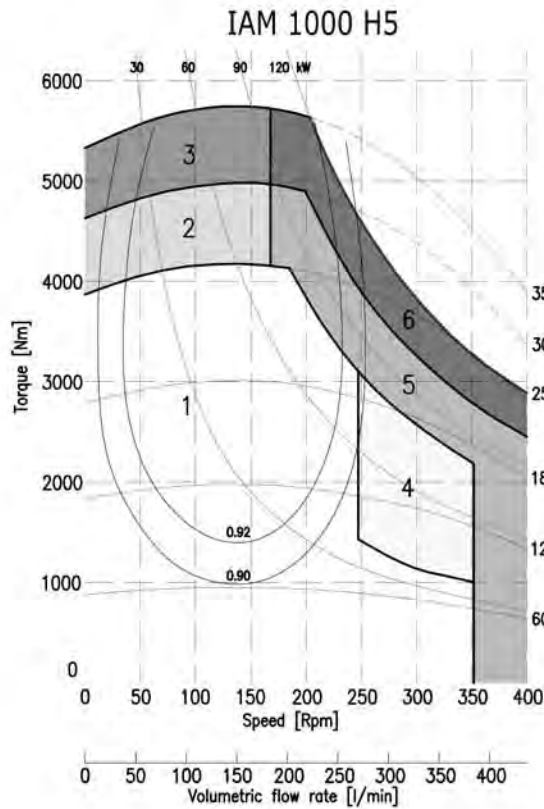


1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing


IAM 1600 H5

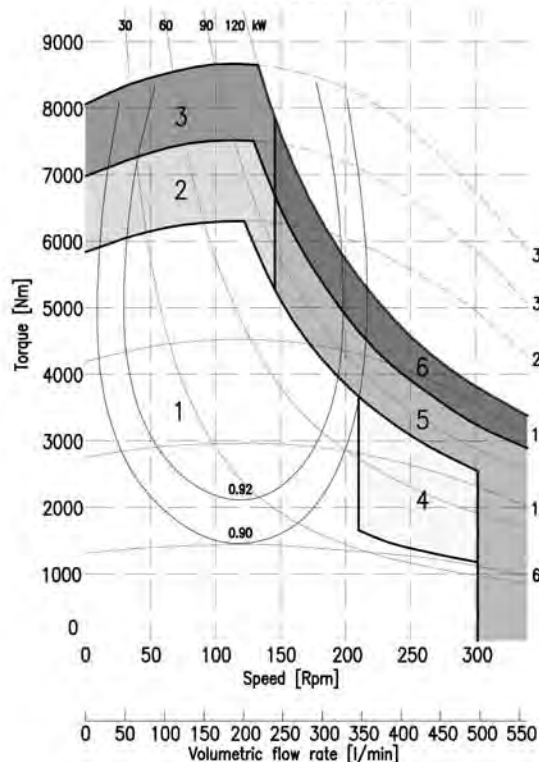


IAM 1800 H5

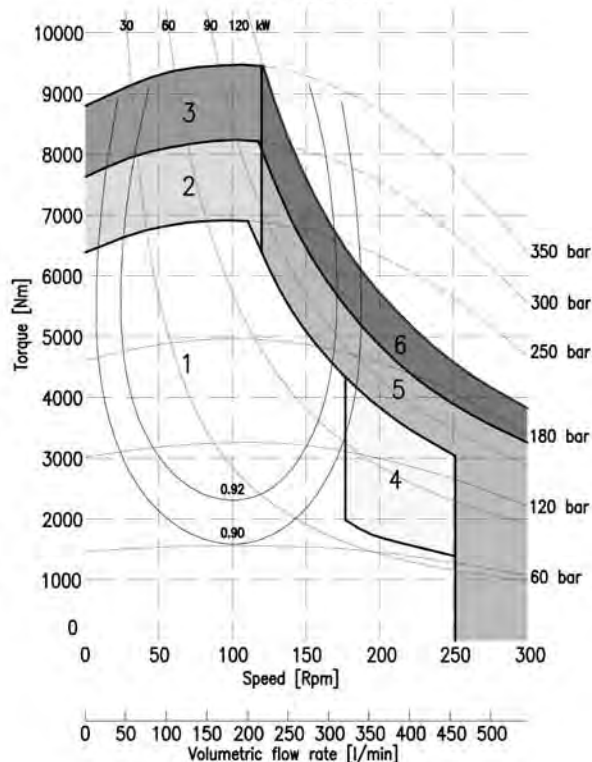

IAM 2000 H5

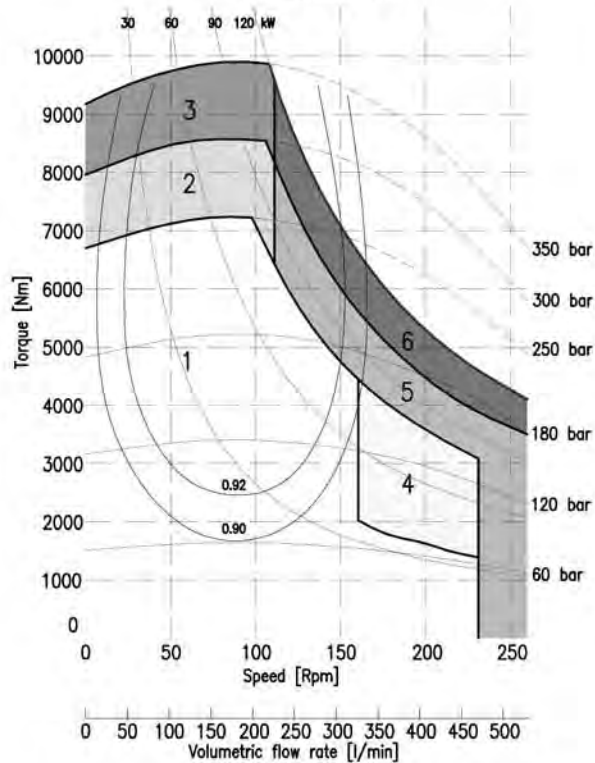

IAM 2200 H5

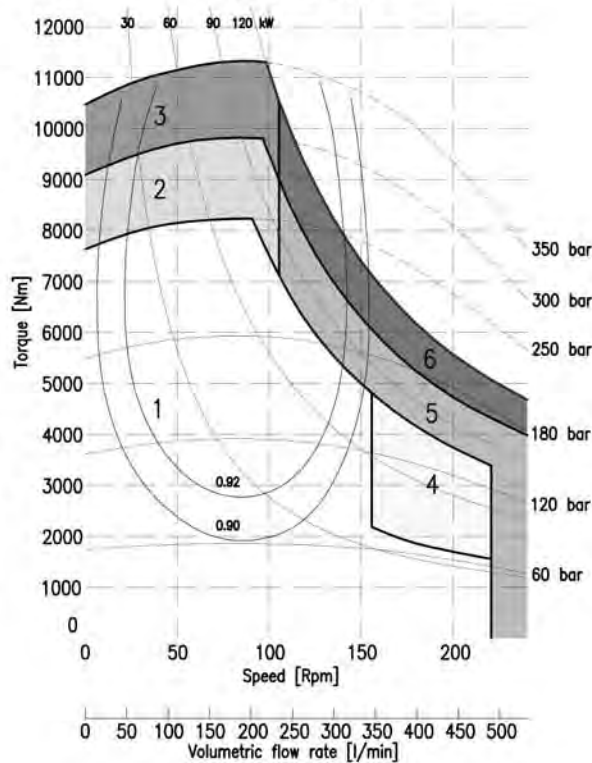

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H55 MODEL

IAM 2200-2500-2800 H55

IAM 2500-2800-3000/C H55

INDEX

TECHNICAL DATA - - - - -	<i>Pag.</i>	82
IAM H55 2200-2500-2800 - - - - -	"	83
IAM H55 2500-2800-3000/C- - - - -	"	84
ORDERING INSTRUCTIONS - - - - -	"	85
GRAPHIC PERFORMANCES H55 2200-2500-2800-3000 - - - - -	"	86

TECHNICAL DATA

H55


MODEL		IAM 2200 H55	IAM 2500 H55	IAM 2800 H55	IAM 3000 H55
Displacement	cc/rev	2126	2525	2807	3028
Specific Torque	Nm/bar	33.8	40.2	44.7	48.2
Max cont. Pressure	bar	250	250	250	250
Max int. Pressure	bar	300	300	300	300
Peak pressure	bar	350	350	350	350
Max continuous speed	rpm	240	240	240	230
Peak speed	rpm	280	280	280	270
Max continuous power	HP	163	163	163	163
	kW	120	120	120	120
Max power	HP	228	228	228	228
	kW	170	170	170	170

- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 203 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 0.5 rpm
- Flushing flow: 15 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.


SIZE

IAM H55 2200-2500-2800

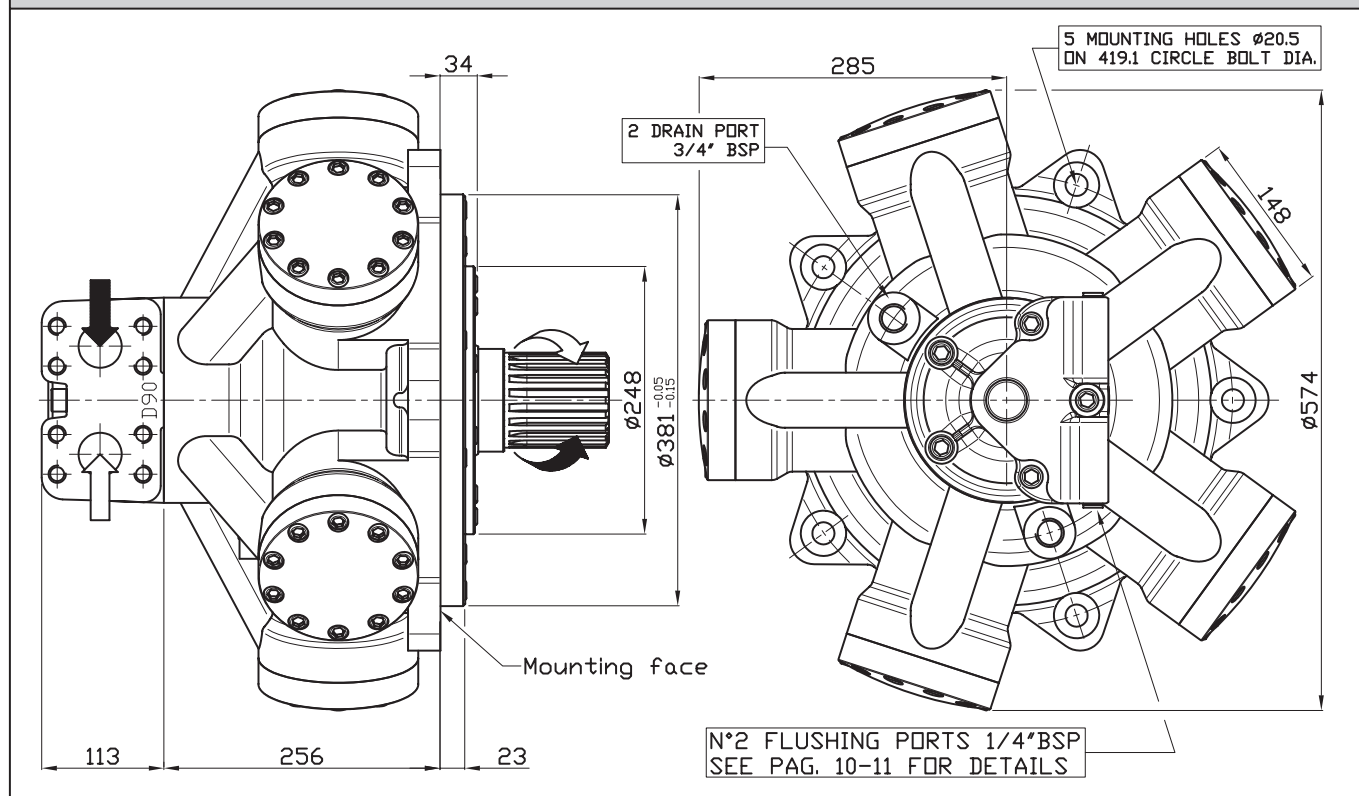


SHAFT

IAM H55 2200-2500-2800

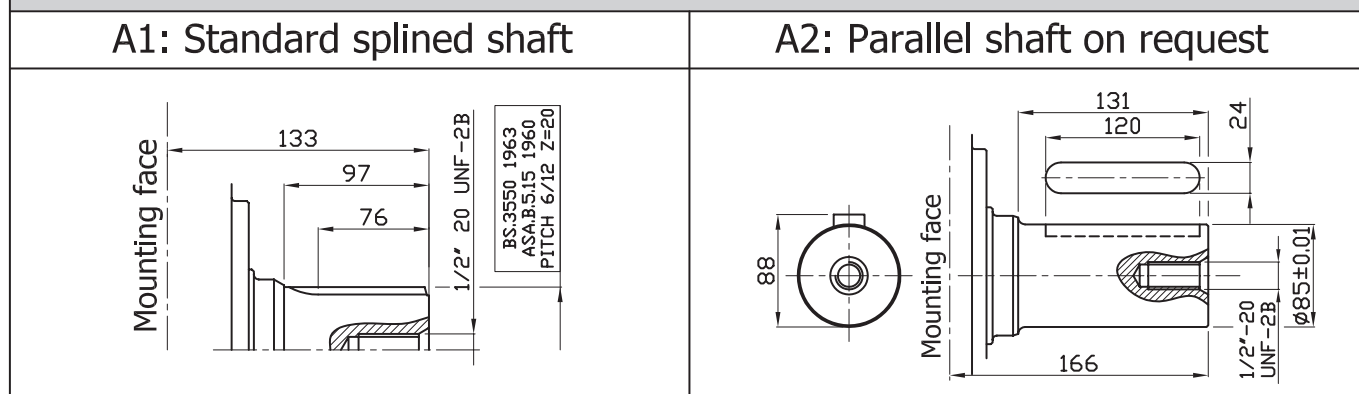

SIZE


IAM H55 2500/C-2800/C-3000/C

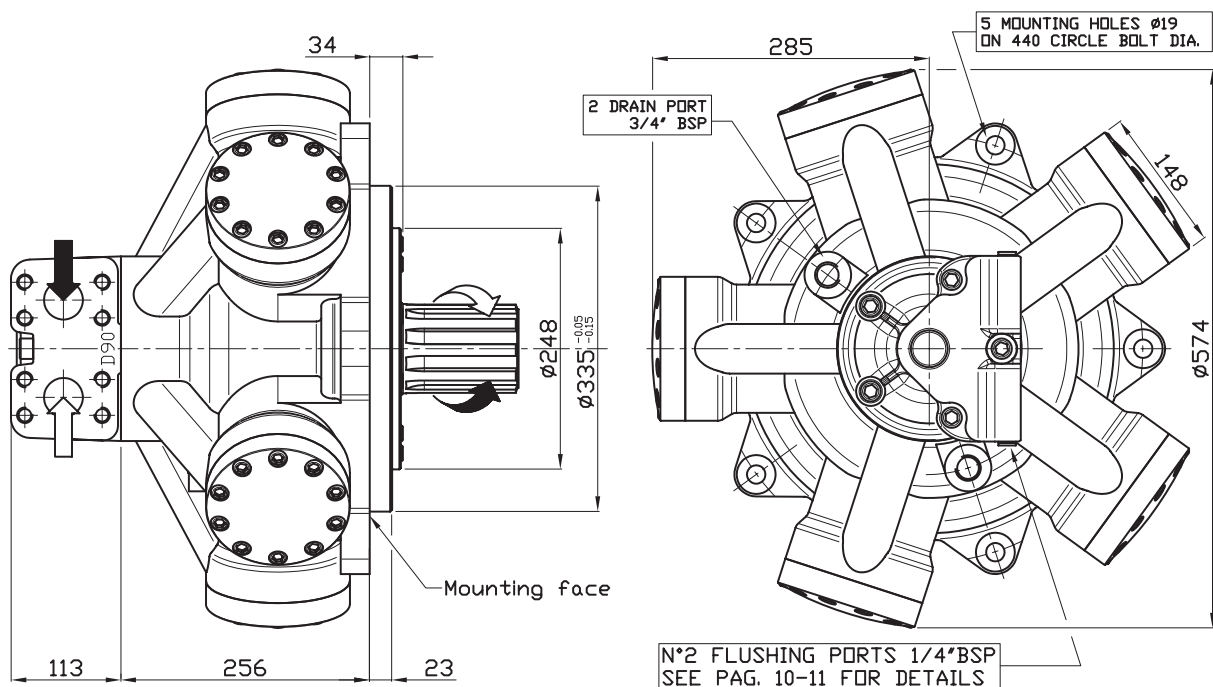


SHAFT

IAM H55 2500/C-2800/C-3000/C





A0: Standard splined shaft

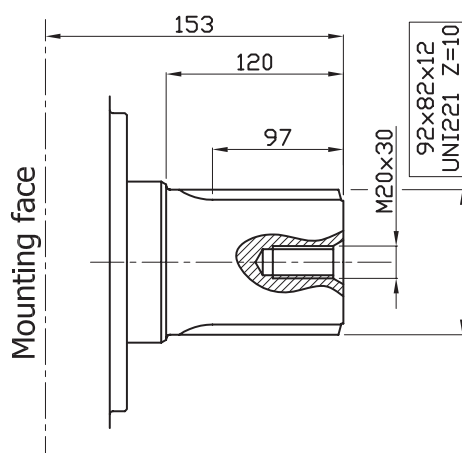

ORDERING INSTRUCTIONS

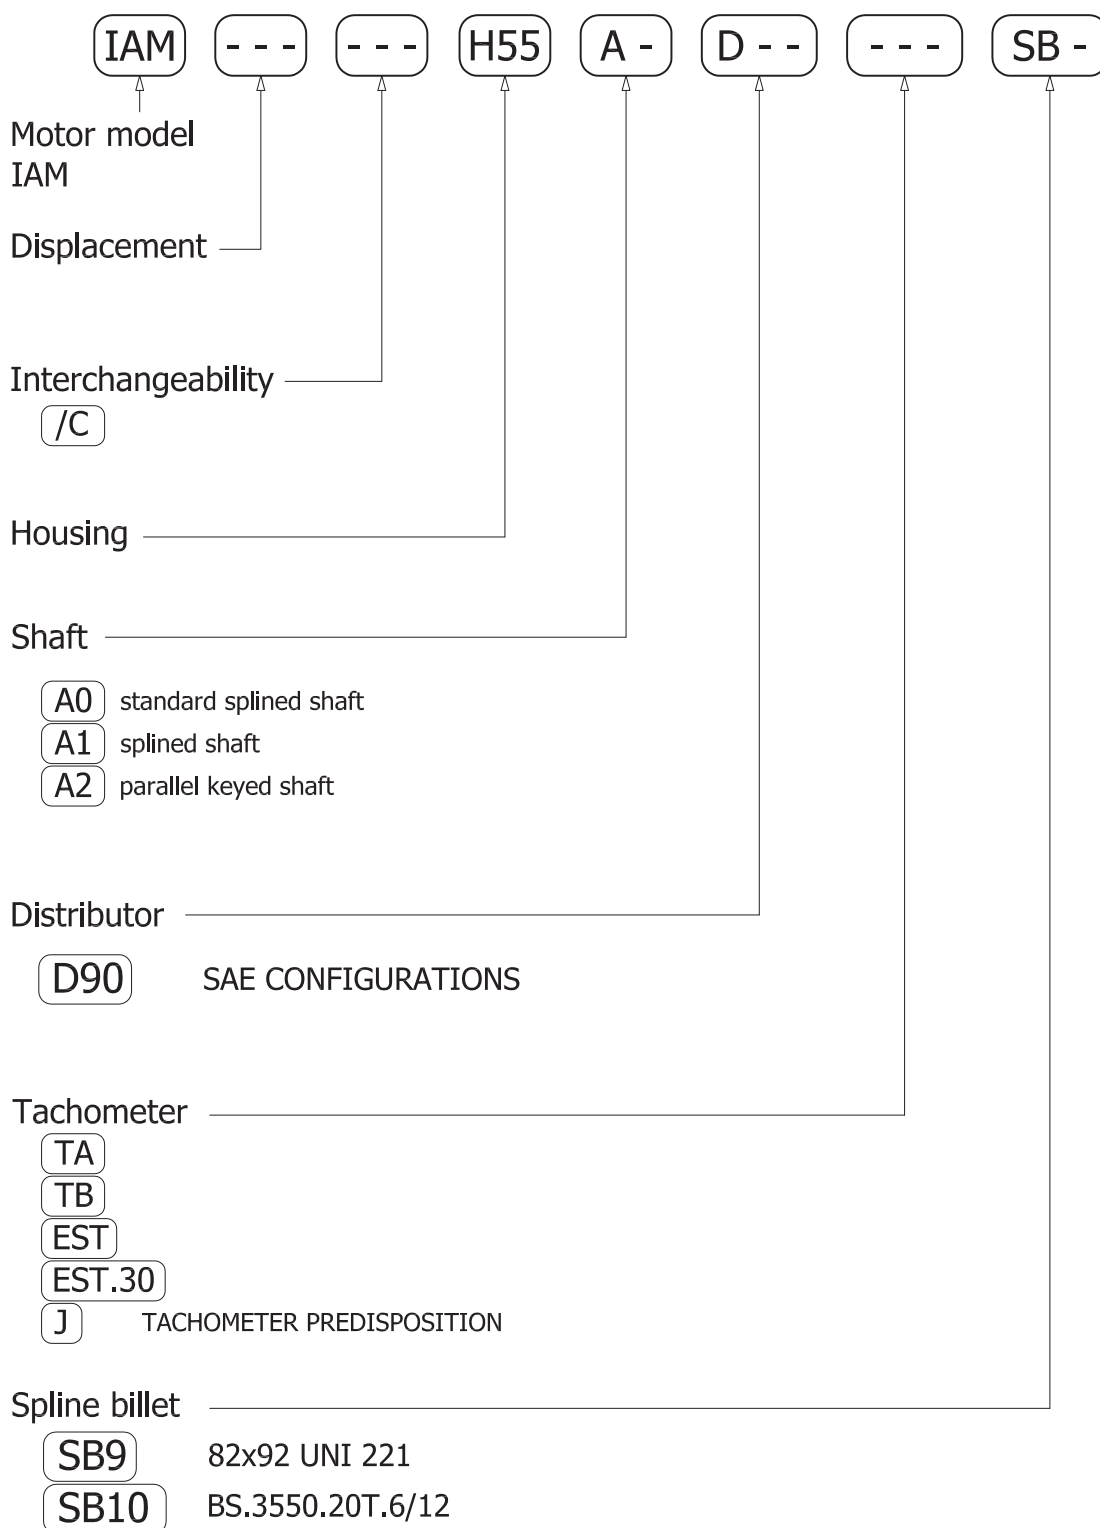

EXAMPLE: IAM.2200.H55.A1.D90
 IAM.2800.H55.A2.D90.TA.SB9
 IAM.2500/C.H55.A0.D90

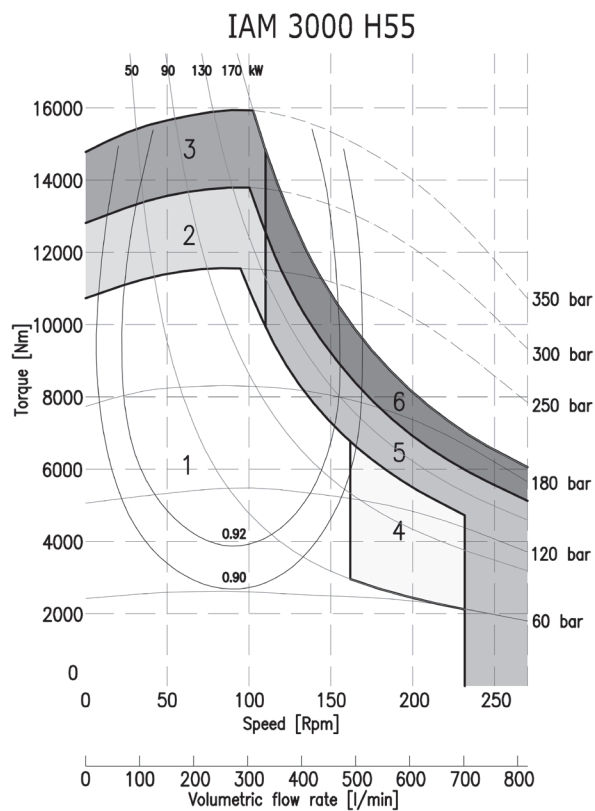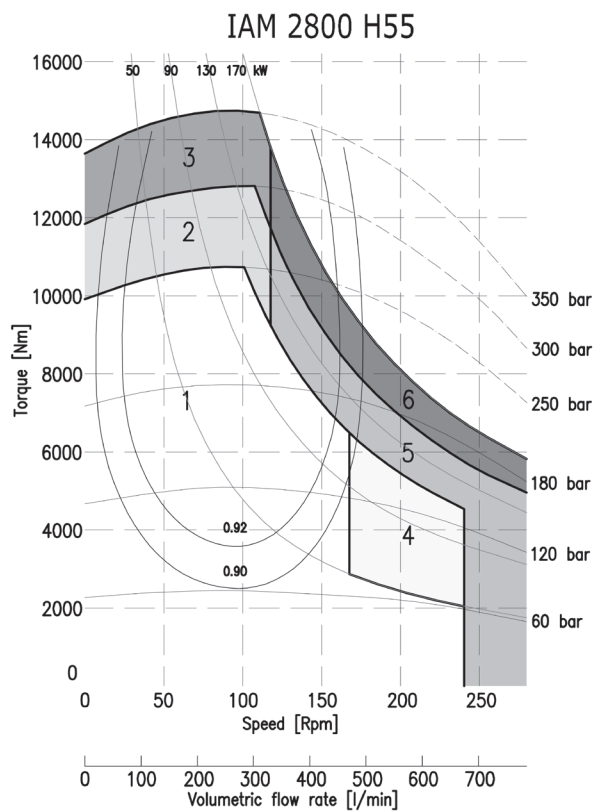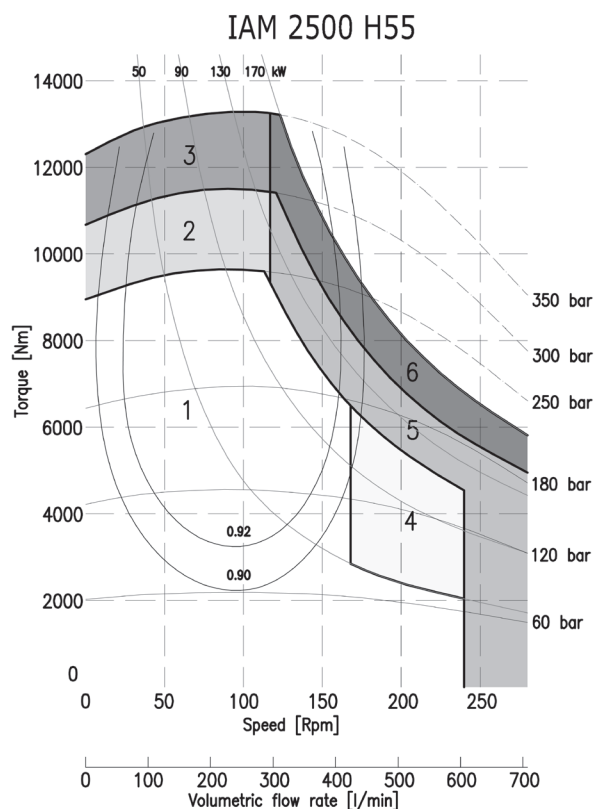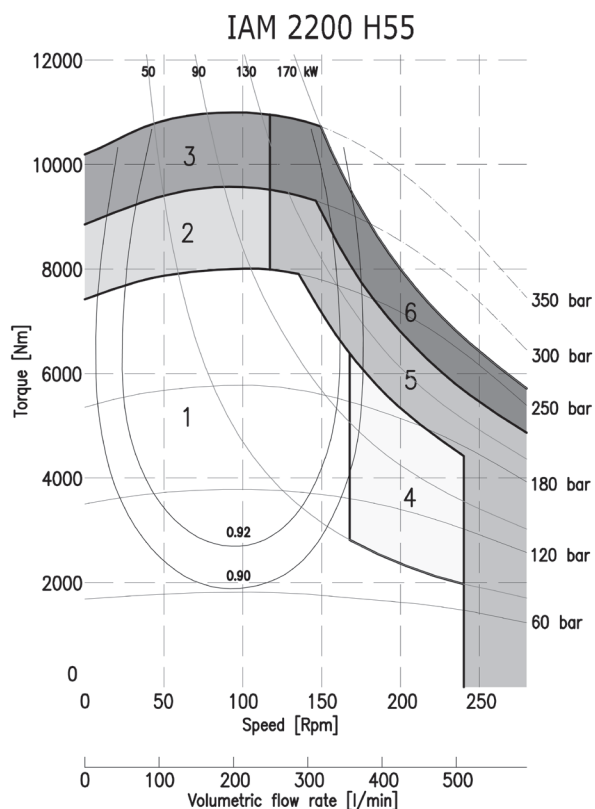

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H6 MODEL

***IAM 2200-2500-2800
3000-3200-3500 H6***

***IAM 2200-2500-2800
3000-3200-3500/C H6***

***IAM 2200/B125
2500/B150
3000/B200***

INDEX

TECHNICAL DATA - - - - -	Pag.	88
IAM H6 2200-2500-2800-3000-3200-3500 - - - - -	"	89
IAM H6 2200-2500-2800-3000-3200-3500/C - - - - -	"	90
IAM H6 2200/B125 2500/B150 3000/B200 - - - - -	"	91
ORDERING INSTRUCTIONS - - - - -	"	92
GRAPHIC PERFORMANCES H6 2200-2500-2800-3000 - - - - -	"	93
GRAPHIC PERFORMANCES H6 3200-3500 - - - - -	"	94

TECHNICAL DATA

H6


MODEL		IAM 2200 H6	IAM 2500 H6	IAM 2800 H6	IAM 3000 H6	IAM 3200 H6	IAM 3500 H6
Displacement	cc/rev	2206	2525	2807	2983	3289	3479
Specific Torque	Nm/bar	35.1	40.2	44.7	47.5	52.3	55.4
Max cont. Pressure	bar	250	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350	350
Max continuous speed	rpm	220	220	220	210	200	200
Peak speed	rpm	260	260	260	250	240	240
Max continuous power	HP	163	163	163	163	163	163
	kW	120	120	120	120	120	120
Max power	HP	228	228	228	228	228	228
	kW	170	170	170	170	170	170

- N° of pistons: 5
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 308 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 0.5 rpm
- Flushing flow: 15 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 2200-2500-2800-3000-3200-3500 H6

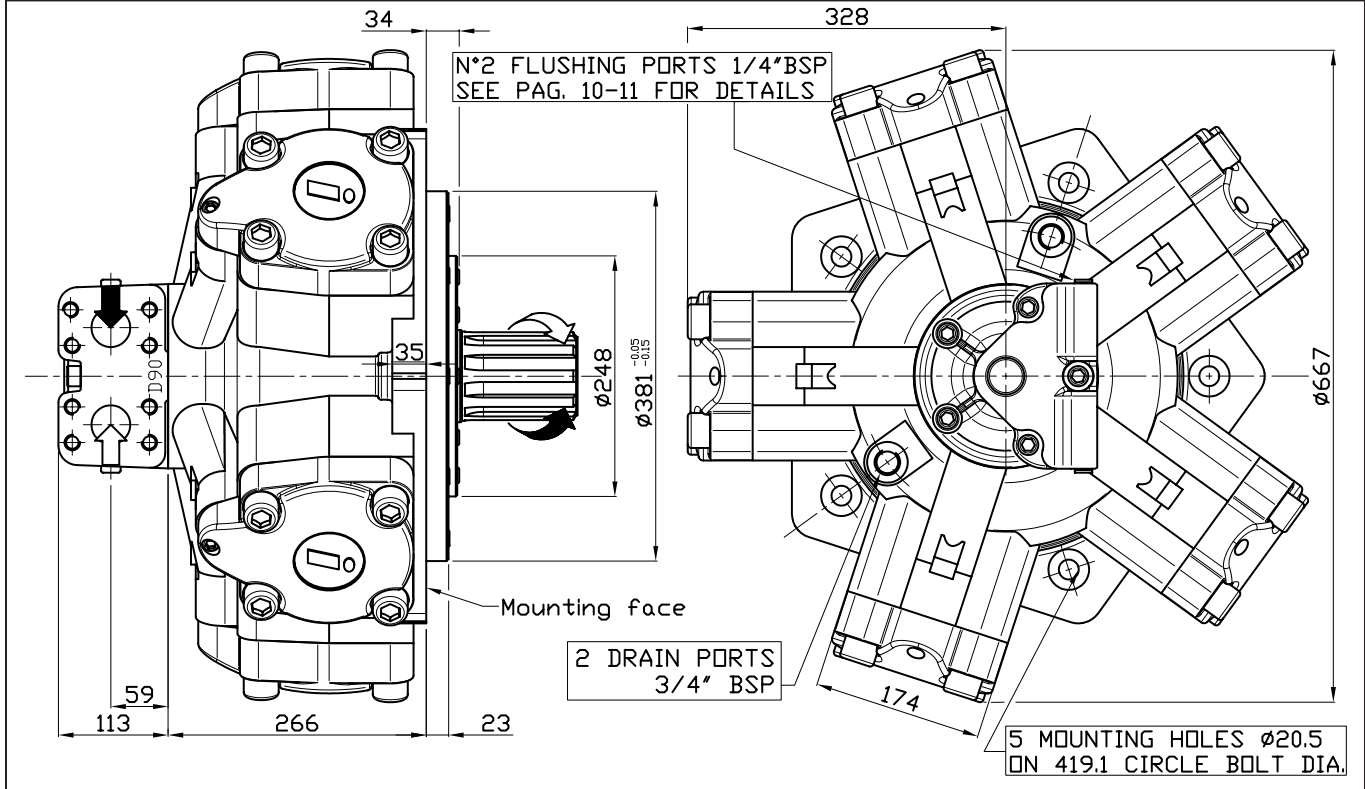


SHAFT

IAM 2200-2500-2800-3000-3200-3500 H6


A0: Standard splined shaft

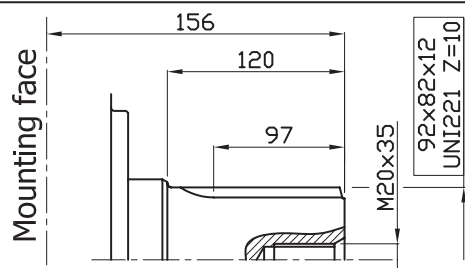

A1: Splined shaft on request

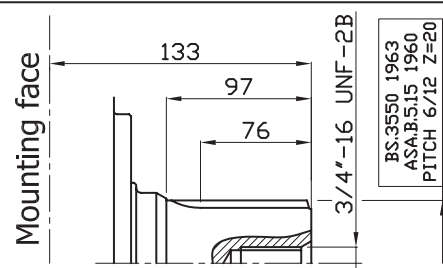


A2: Parallel shaft on request

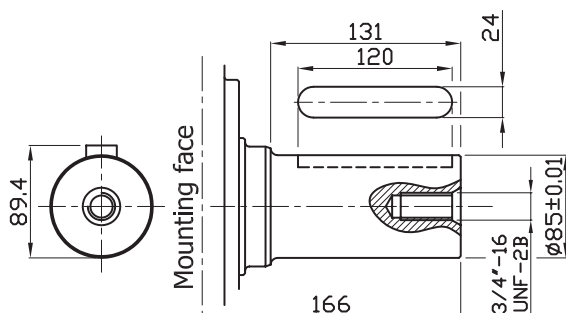





SIZE

IAM 2200/C-2500/C-2800/C-3000/C-3200/C-3500/C H6

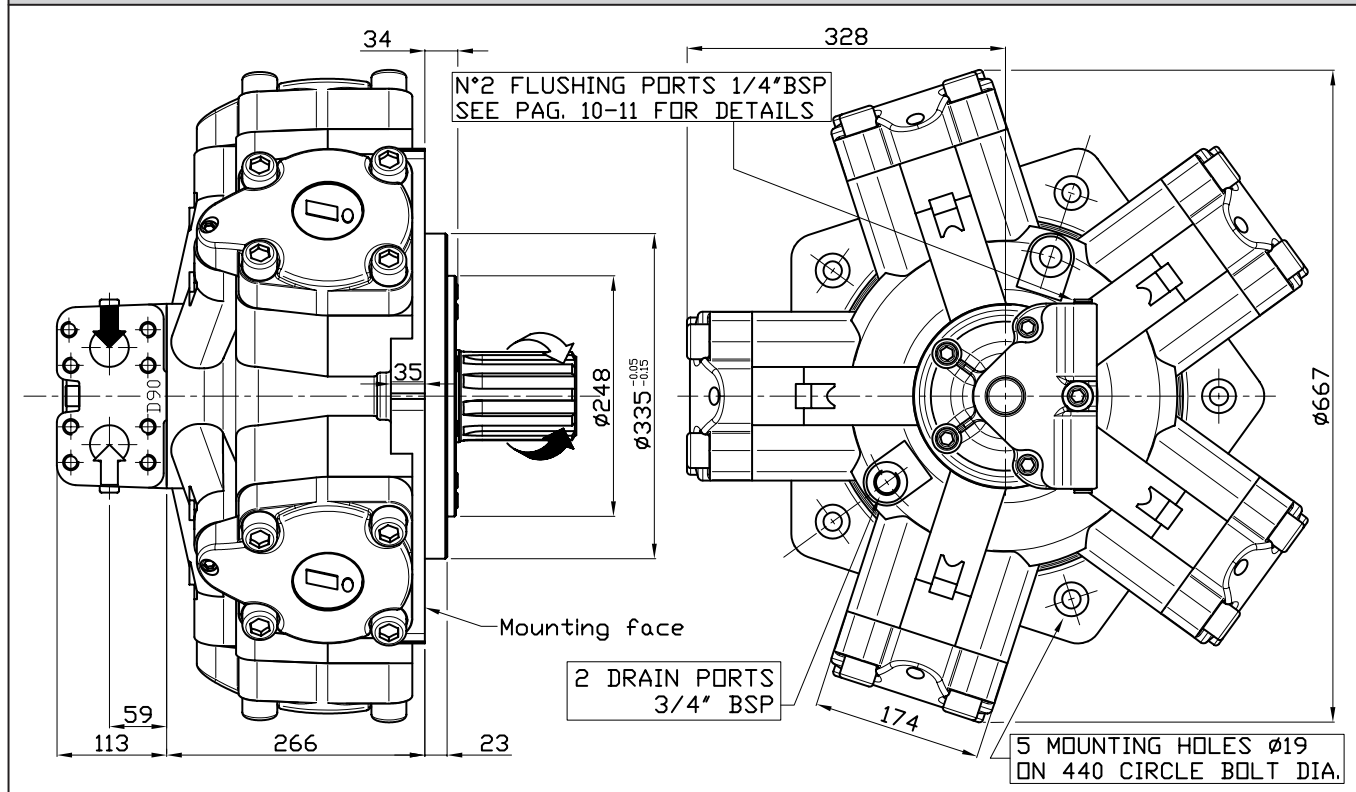

SHAFT

IAM 2200/C-2500/C-2800/C-3000/C-3200/C-3500/C H6

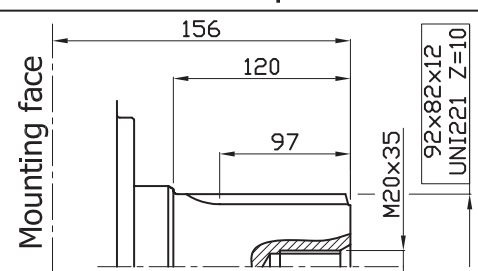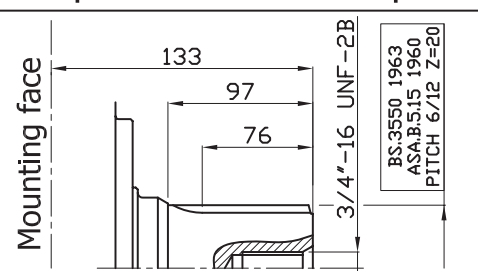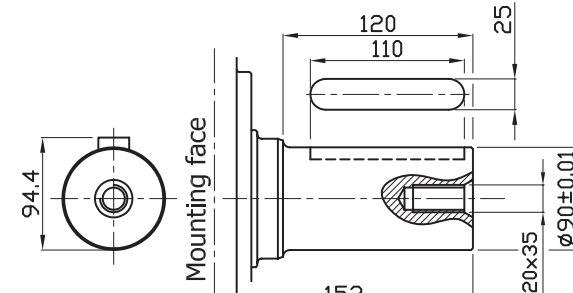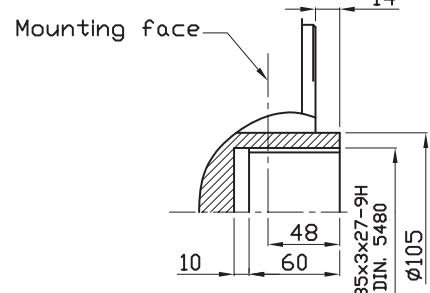
A0: Standard splined shaft	A1: Splined shaft on request
 Technical drawing of the A0: Standard splined shaft. Dimensions and specifications include: - Mounting face - Top width: 156 - Inner width: 120 - Inner width: 97 - Shaft diameter: $\phi 90 \pm 0.01$ - Shaft length: $\phi 90 \pm 0.01$ - Thread: M20x35 - Specifications: 92x82x12 UNI221 Z=10	 Technical drawing of the A1: Splined shaft on request. Dimensions and specifications include: - Mounting face - Top width: 133 - Inner width: 97 - Inner width: 76 - Thread: 3/4"-16 UNF-2B - Specifications: BS 3550 1963, ASAB.5.15 1960, PITCH 6/12 Z=20
A2: Parallel shaft on request	A3: Female shaft on request
 Technical drawing of the A2: Parallel shaft on request. Dimensions and specifications include: - Mounting face - Top width: 120 - Inner width: 110 - Inner width: 25 - Shaft diameter: $\phi 90 \pm 0.01$ - Shaft length: $\phi 90 \pm 0.01$ - Thread: M20x35 - Outer diameter: 94.4 - Bottom width: 153	 Technical drawing of the A3: Female shaft on request. Dimensions and specifications include: - Mounting face - Top width: 14 - Inner width: 48 - Inner width: 60 - Thread: N85x3x27-9H DIN 5480 - Outer diameter: $\phi 105$ - Bottom width: 10

ORDERING INSTRUCTIONS


	IAM	- - -	- - -	H6	A -	D - -	- - -	SB -
Motor model IAM	↑	↑	↑	↑	↑	↑	↑	↑
Displacement		↑	↑					
Interchangeability			↑					
	/C							
	/B125	(2200/B125)						
	/B150	(2500/B150)						
	/B200	(3000/B200)						
Housing				↑				
Shaft				↑				
	A0	standard splined shaft						
	A1	splined shaft						
	A2	parallel keyed shaft						
	A3	female shaft						
	A11	splined shaft						
	A12	splined shaft						
	A..	other shaft						
Distributor								
	D90	SAE CONFIGURATIONS						
Tachometer								
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet								
	SB9	82x92 UNI 221						
	SB10	BS.3550.20T.6/12						

EXAMPLE: IAM.2500.H6.A1.D90
IAM.2800.H6.A0.D90.TA.SB9
IAM.2500/C.H6.A2.D90.J


IAM 2200 H6

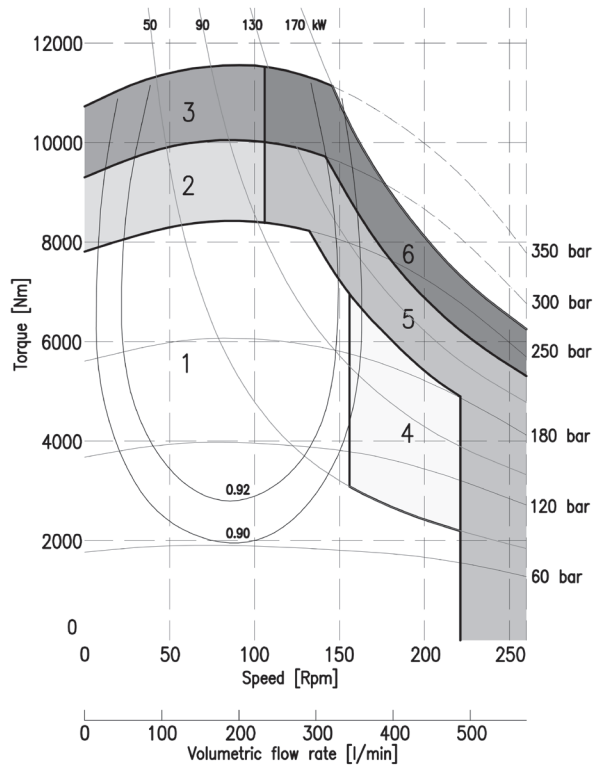


IAM 2500 H6

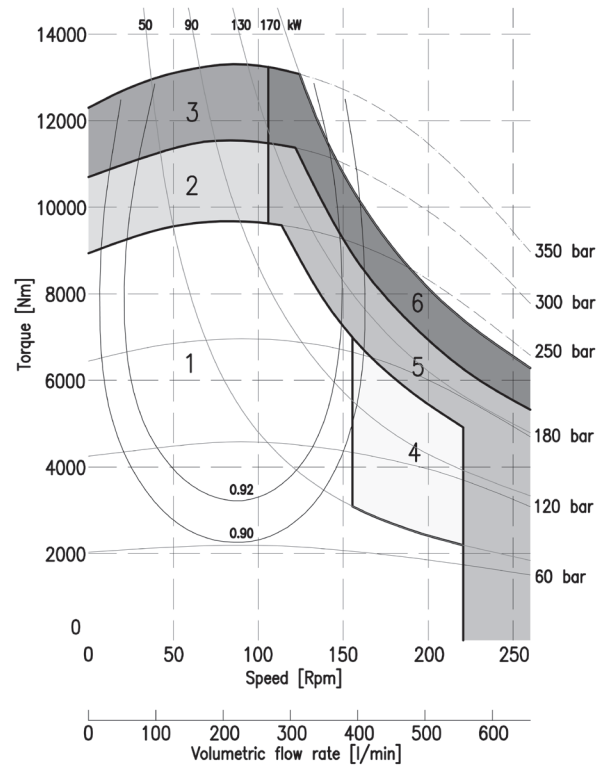

IAM 2800 H6


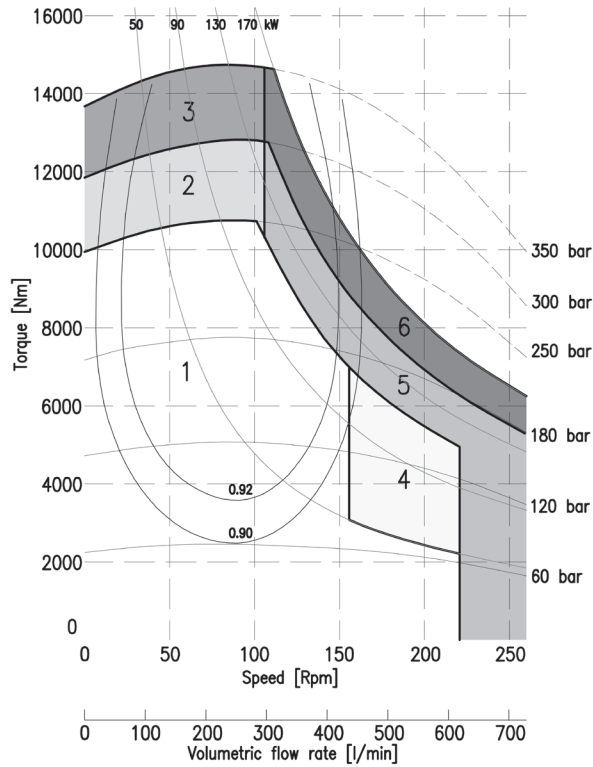


IAM 3000 H6

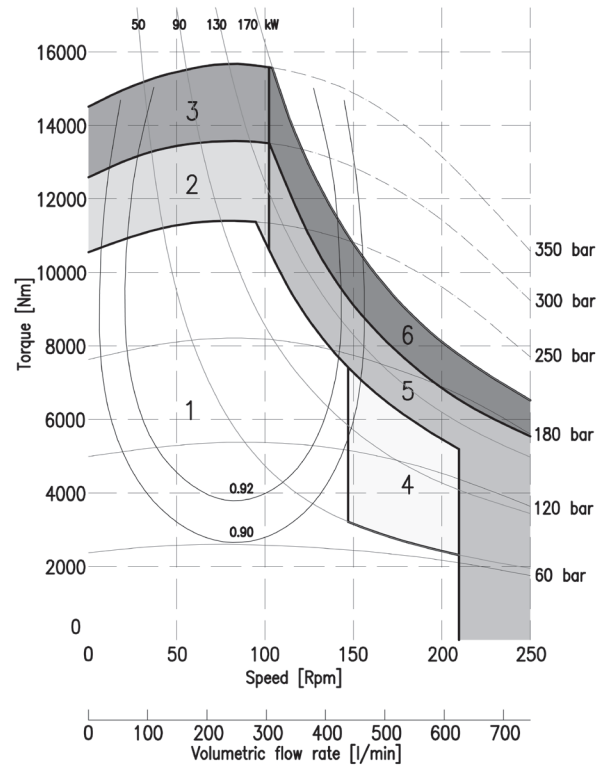

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

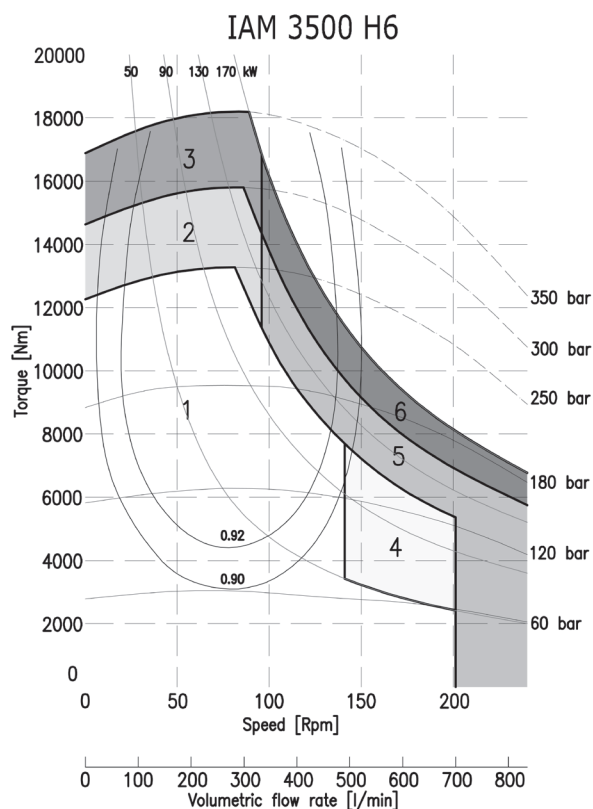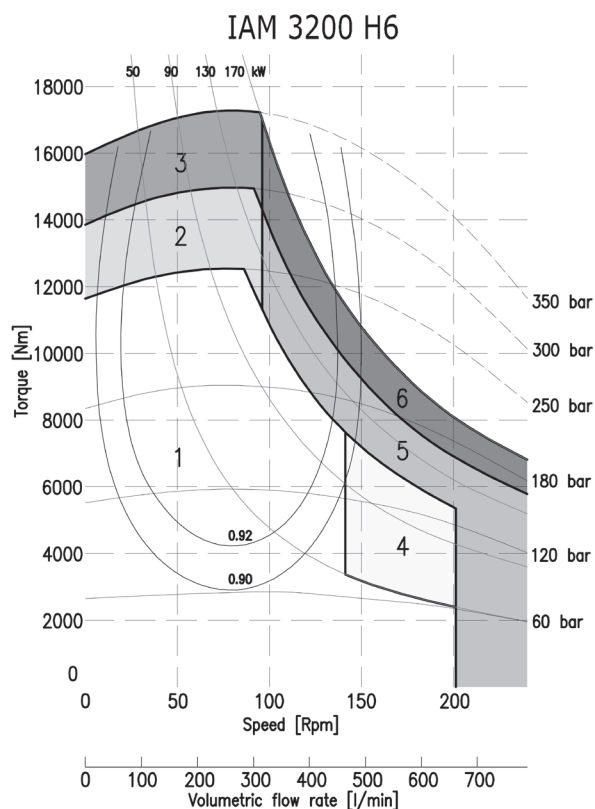

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H7 MODEL

***IAM 3900-4300-4600-
5000-5400 H7***

***IAM 3900-4300-4600-
5000-5400/C H7***

INDEX

TECHNICAL DATA - - - - -	<i>Pag.</i>	96
IAM H7 3900-4300-4600-5000-5400 - - - - -	"	97
IAM H7 3900-4300-4600-5000-5400/C - - - - -	"	98
ORDERING INSTRUCTIONS - - - - -	"	99
GRAPHIC PERFORMANCES H7 3900-4300-4600-5000 - - - - -	"	100
GRAPHIC PERFORMANCES H7 5400 - - - - -	"	101


		IAM 3900 H7	IAM 4300 H7	IAM 4600 H7	IAM 5000 H7	IAM 5400 H7
Displacement	cc/rev	3907	4343	4616	5088	5384
Specific Torque	Nm/bar	62.2	69.1	73.5	81.0	85.7
Max cont. Pressure	bar	250	250	250	250	250
Max int. Pressure	bar	300	300	300	300	300
Peak pressure	bar	350	350	350	350	350
Max continuous speed	rpm	160	150	140	140	130
Peak speed	rpm	200	190	190	180	170
Max continuous power	HP	177	177	177	177	177
	kW	130	130	130	130	130
Max power	HP	241	241	241	241	241
	kW	180	180	180	180	180

- N° of pistons: 7
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 405 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 0.5 rpm
- Flushing flow: 20 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 3900-4300-4600-5000-5400 H7

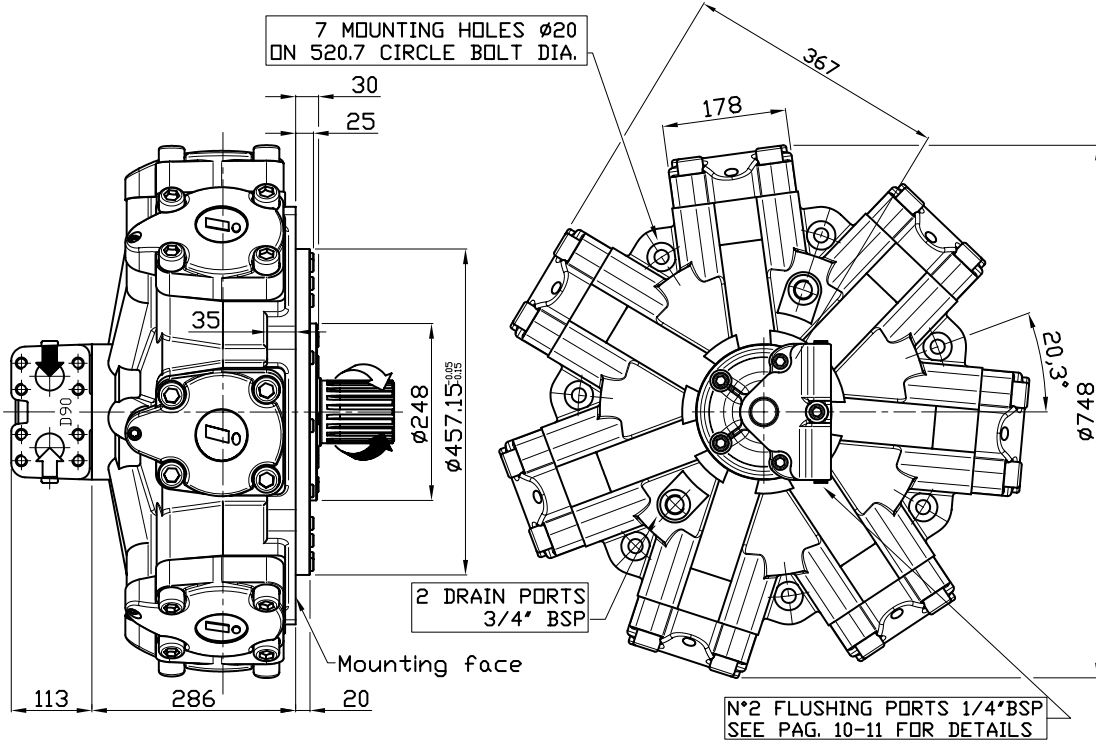


SHAFT

IAM 3900-4300-4600-5000-5400 H7


A1: Standard splined shaft

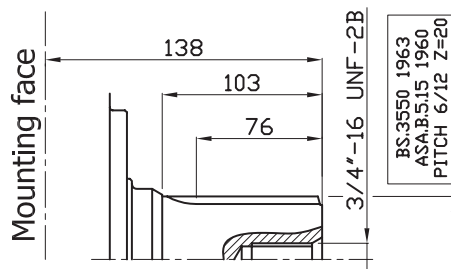

A2: Parallel shaft on request

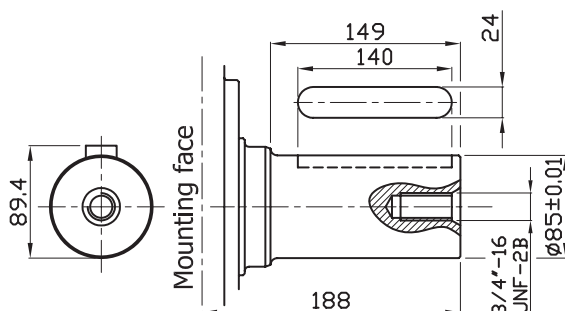


A4: Taper shaft on request

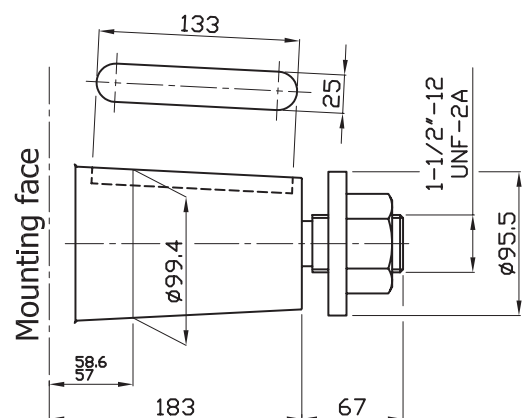

SIZE


IAM 3900/C-4300/C-4600/C-5000/C-5400/C H7

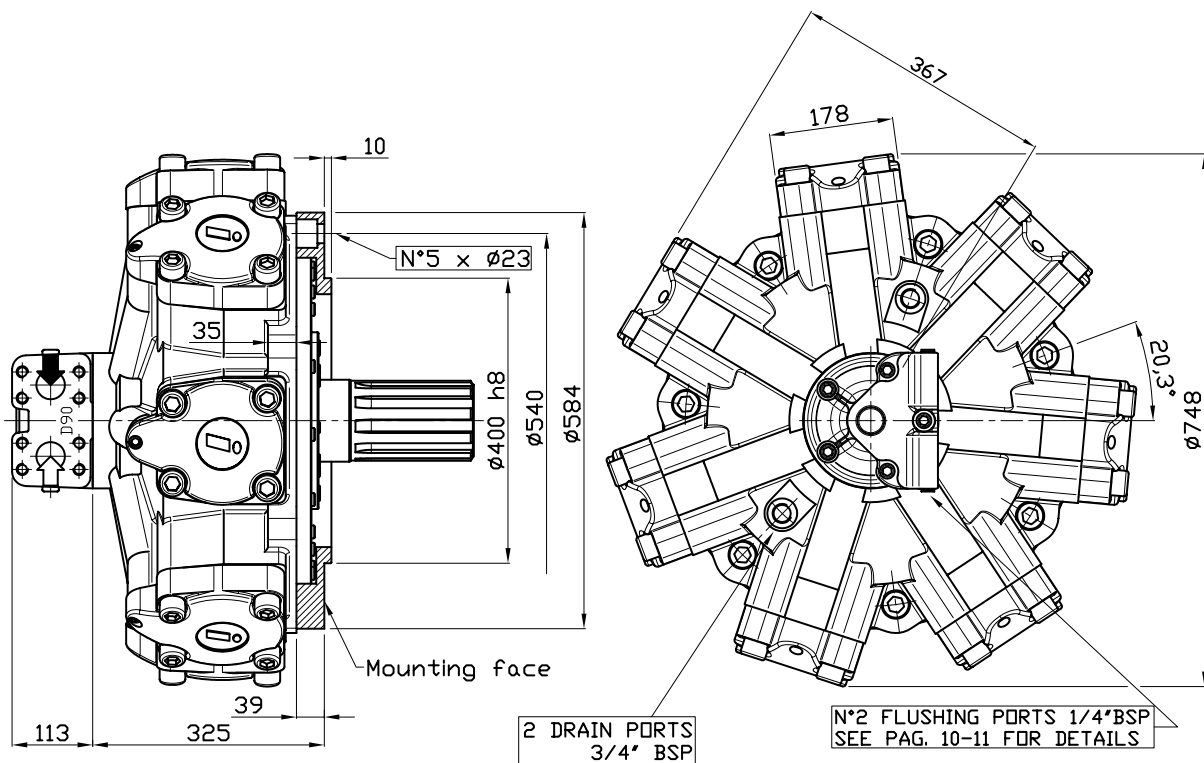


SHAFT

IAM 3900/C-4300/C-4600/C-5000/C-5400/C H7

A0: Standard splined shaft

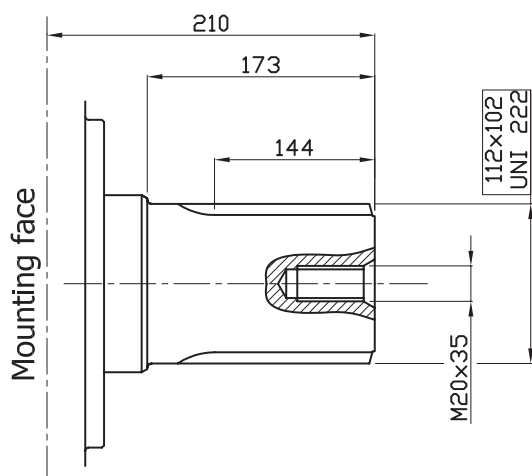





A2: Parallel shaft on request

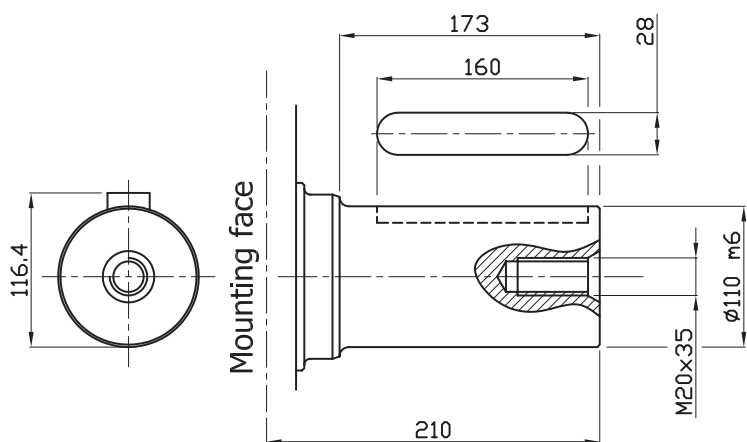

ORDERING INSTRUCTIONS


	IAM	- - -	- - -	H7	A -	D - -	- - -	SB -
	↑	↑	↑	↑	↑	↑	↑	↑
Motor model	IAM							
Displacement								
Interchangeability								
	/C							
Housing								
Shaft								
	A0	standard splined shaft						
	A1	splined shaft						
	A2	parallel keyed shaft						
	A4	tapered shaft						
	A..	other shaft						
Distributor								
	D90	SAE CONFIGURATIONS						
Tachometer								
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet								
	SB10	BS.3550.20T.6/12						
	SB11	102x112 UNI 222						

EXAMPLE: IAM.3900.H7.A1.D90
 IAM.4600.H7.A1.D90.TA.SB10
 IAM.5400/C.H7.A2.D90.J

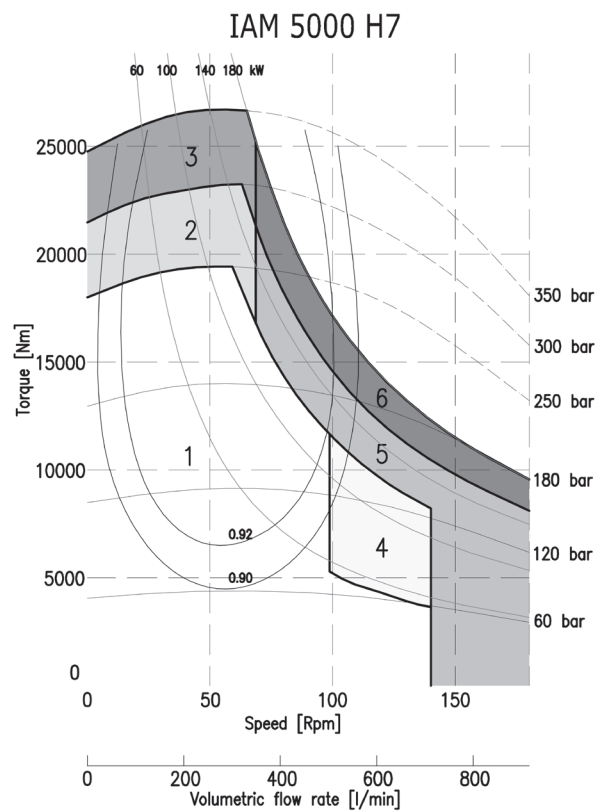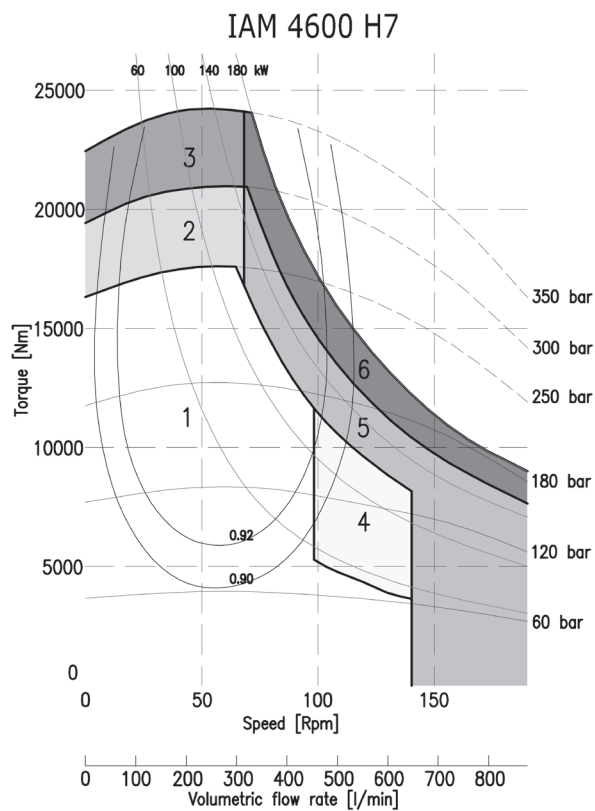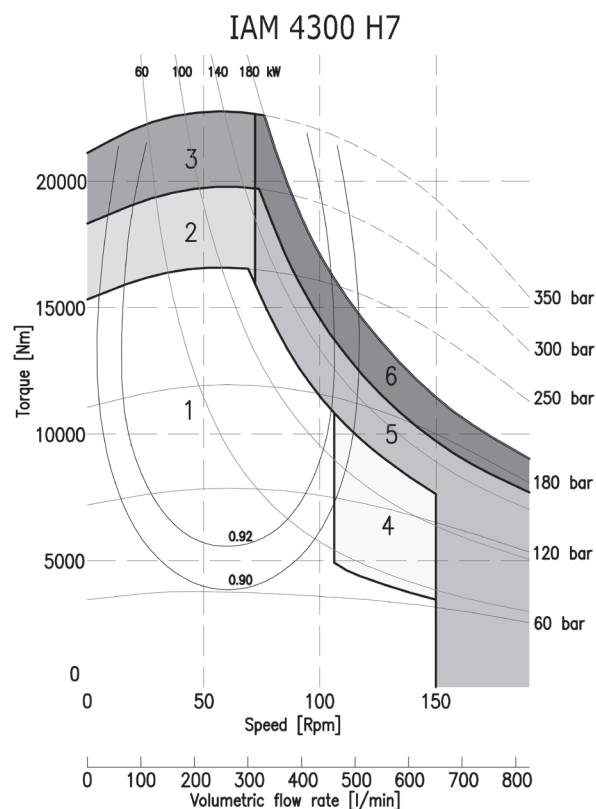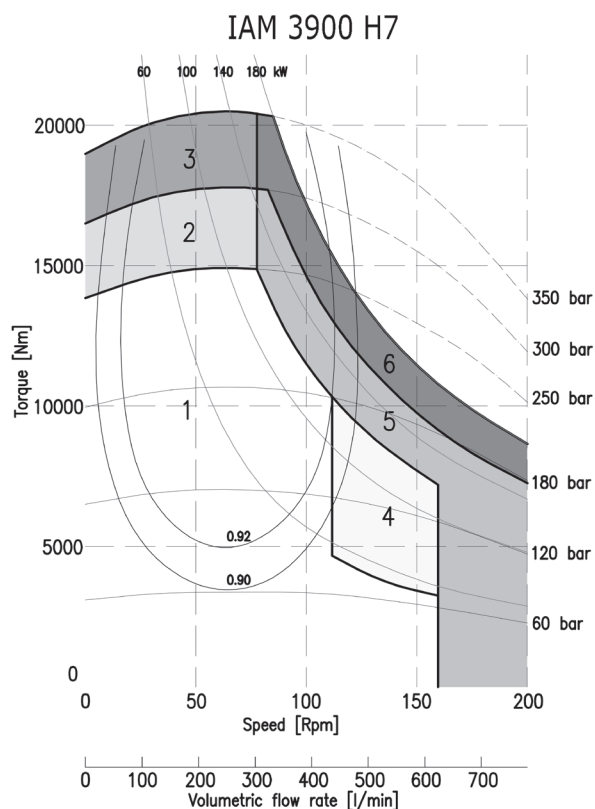

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

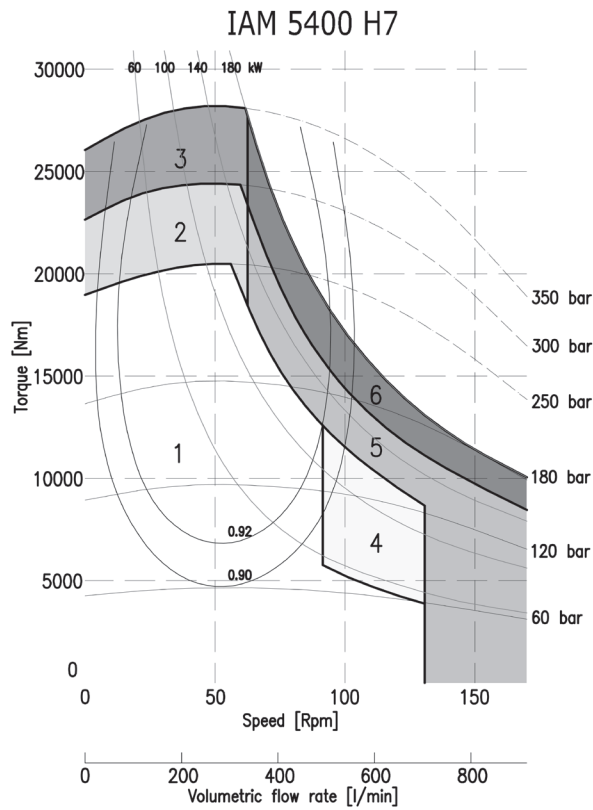

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

IAM SERIES

H8 MODEL

***IAM 6000-6500-6800-
7600-8000 H8***

***IAM 6000-6500-6800-
7600-8000 H8***

INDEX

TECHNICAL DATA - - - - -	<i>Pag.</i>	104
IAM H8 6000-6500-6800-7600-8000 - - - - -	"	105
IAM H8 6000-6500-6800-7600-8000/C - - - - -	"	106
ORDERING INSTRUCTIONS - - - - -	"	107
GRAPHIC PERFORMANCES H8 6000-6500-6800-7600 - - - - -	"	108
GRAPHIC PERFORMANCES H8 8000 - - - - -	"	109

TECHNICAL DATA

H8


MODEL		IAM 6000 H8	IAM 6500 H8	IAM 6800 H8	IAM 7600 H8	IAM 8000 H8
Displacement	cc/rev	5966	6581	6962	7620	8062
Specific Torque	Nm/bar	95.0	104.7	110.8	121.3	128.3
Max cont. Pressure	bar	250	250	250	190	180
Max int. Pressure	bar	290	290	290	230	220
Peak pressure	bar	320	320	320	280	270
Max continuous speed	rpm	120	120	120	90	80
Peak speed	rpm	140	140	140	100	90
Max continuous power	HP	183	183	183	177	177
	kW	135	135	135	130	130
Max power	HP	255	255	255	241	241
	kW	190	190	190	180	180

- N° of pistons: 10
- Max case pressure: 6 bar
- Max back pressure: 70 bar
- Dry weight: 590 kg
- Temperature range: -30°C ÷ +70°C
- Minimum speed: 0.5 rpm
- Flushing flow: 20 l/min

(*)for further details regarding flushing go to page 10 of this catalogue.

SIZE


IAM 6000-6500-6800-7600-8000 H8

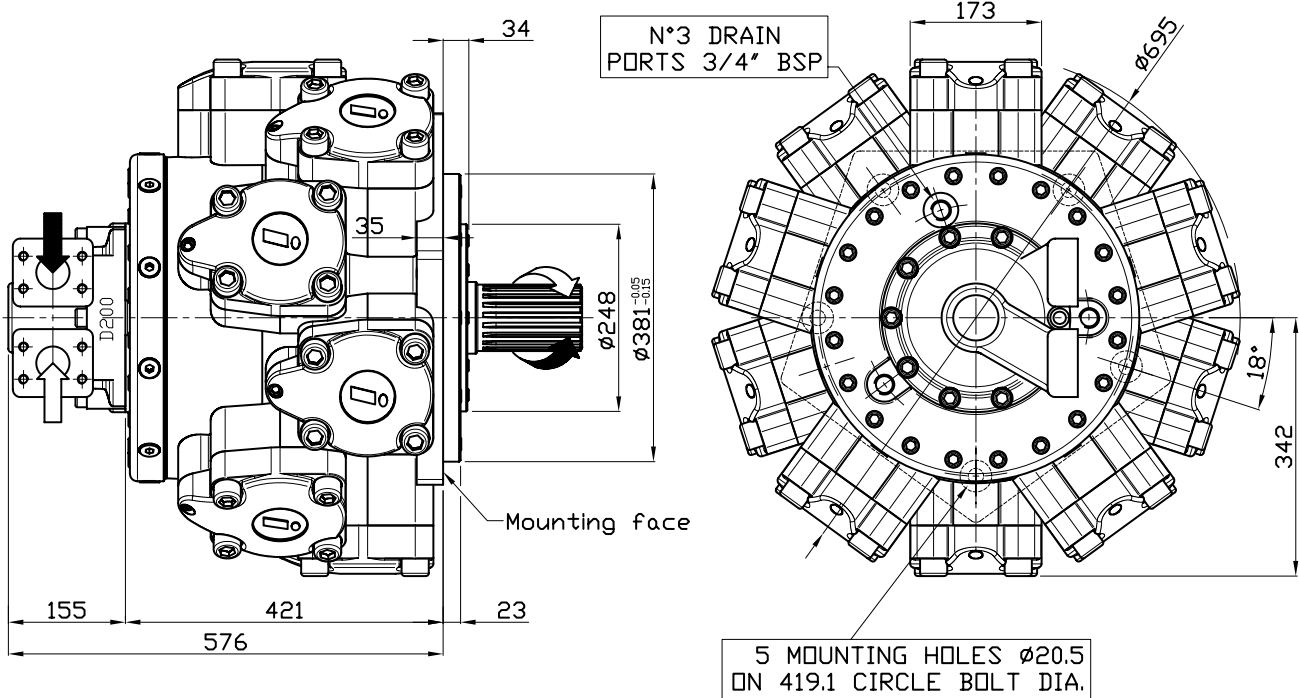


SHAFT

IAM 6000-6500-6800-7600-8000 H8


A1:
Standard
Splined Shaft

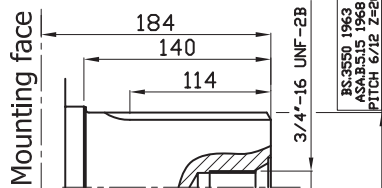


A11:
Splined Shaft
on request

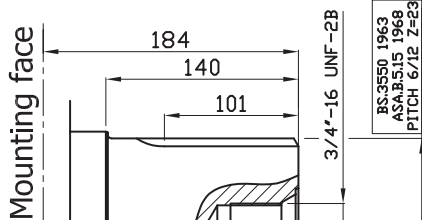


A5:
Splined Shaft
on request

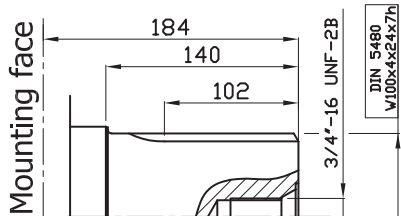

A2:
Parallel Shaft
on request

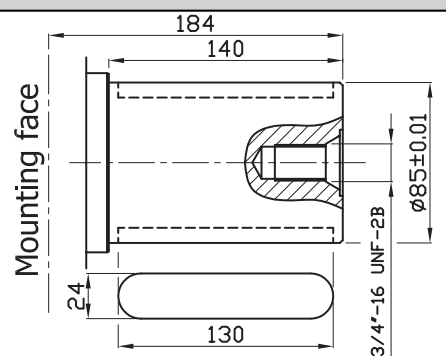


A22:
Parallel Shaft
on request

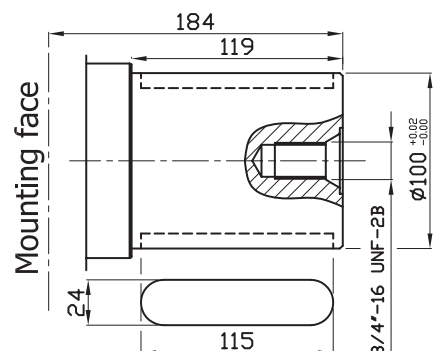

SIZE


IAM 6000/C-6500/C-6800/C-7600/C-8000/C H8

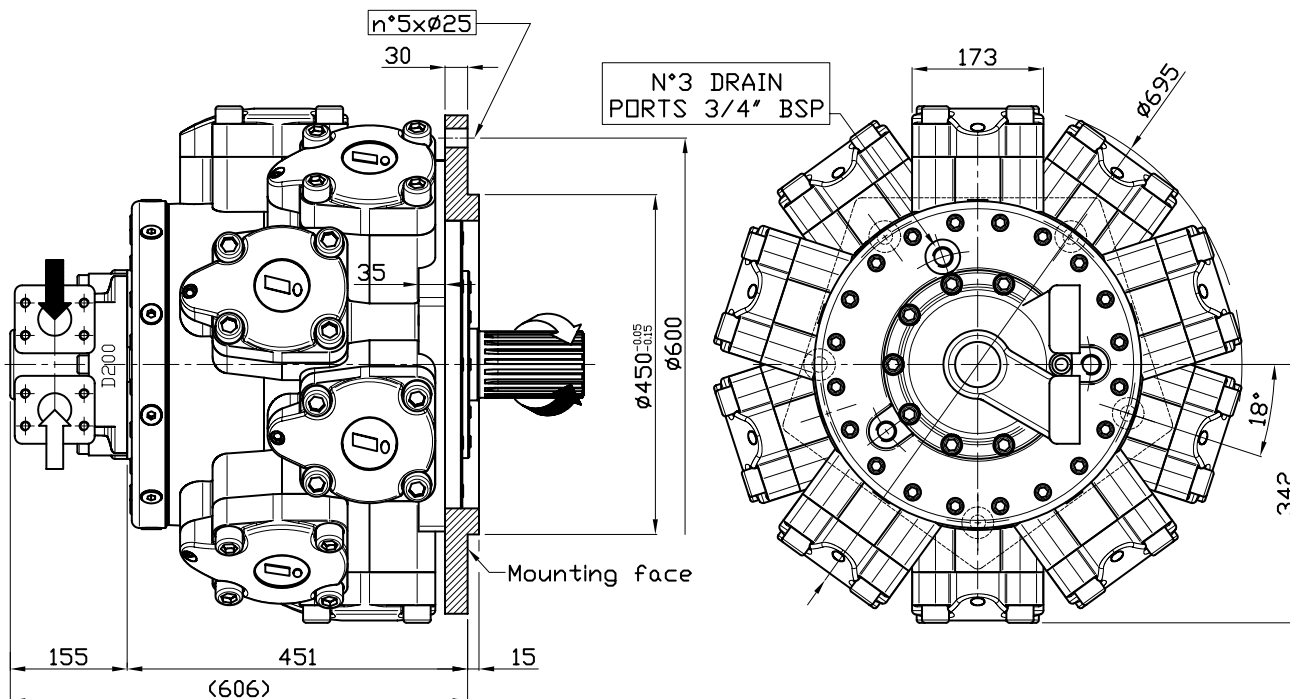


SHAFT

IAM 6000/C-6500/C-6800/C-7600/C-8000/C H8

A0: Standard splined shaft

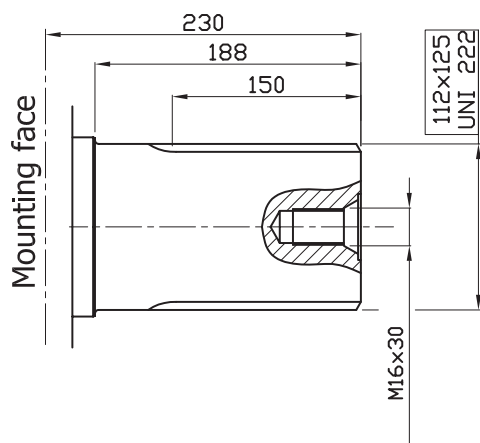





A2: Parallel shaft on request

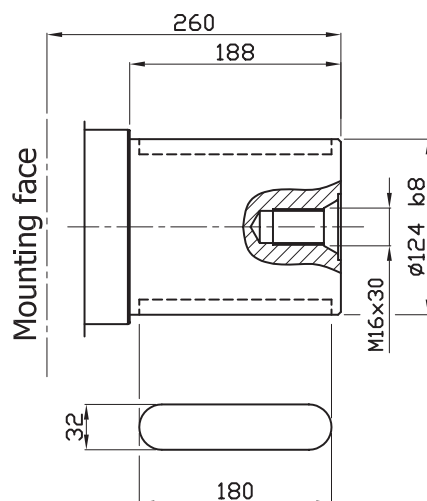

ORDERING INSTRUCTIONS


	IAM	- - -	- - -	H8	A -	D - -	- - -	SB -
	↑	↑	↑	↑	↑	↑	↑	↑
Motor model	IAM							
Displacement								
Interchangeability								
	/C							
Housing								
Shaft								
	A0	standard splined shaft						
	A1	splined shaft						
	A11	splined shaft						
	A2	parallel keyed shaft						
	A22	parallel keyed shaft						
	A5	splined DIN shaft						
	A..	other shaft						
Distributor								
	D200	SAE CONFIGURATIONS						
Tachometer								
	TA							
	TB							
	EST							
	EST.30							
	J	TACHOMETER PREDISPOSITION						
Spline billet								
	SB10	BS.3550.20T.6/12						
	SB12	112x125 UNI 222						

EXAMPLE: IAM.6000.H8.A1.D200
IAM.6800.H8.A1.D200.TA.SB10
IAM.8000/C.H8.A0.D200.J

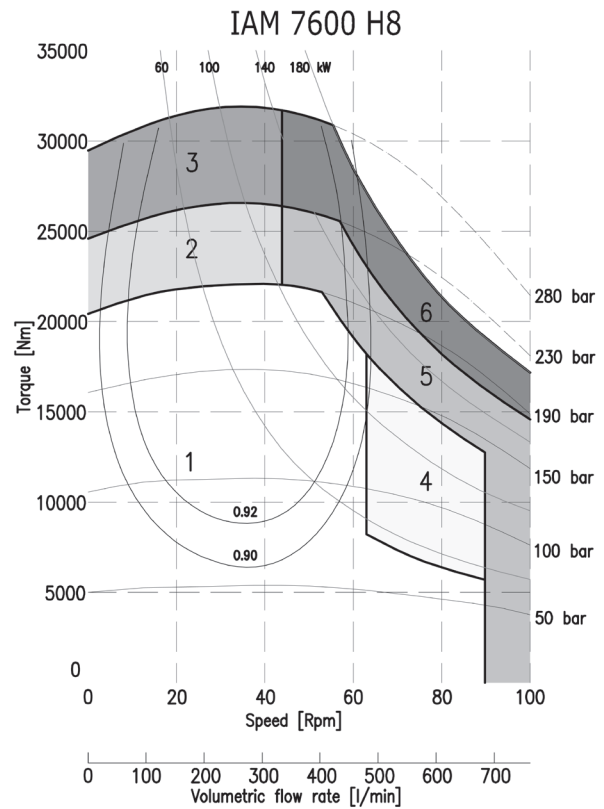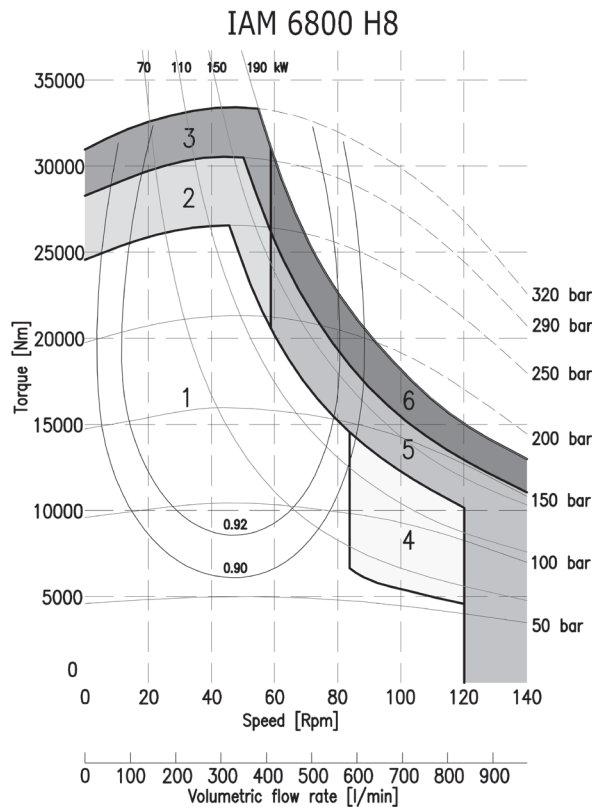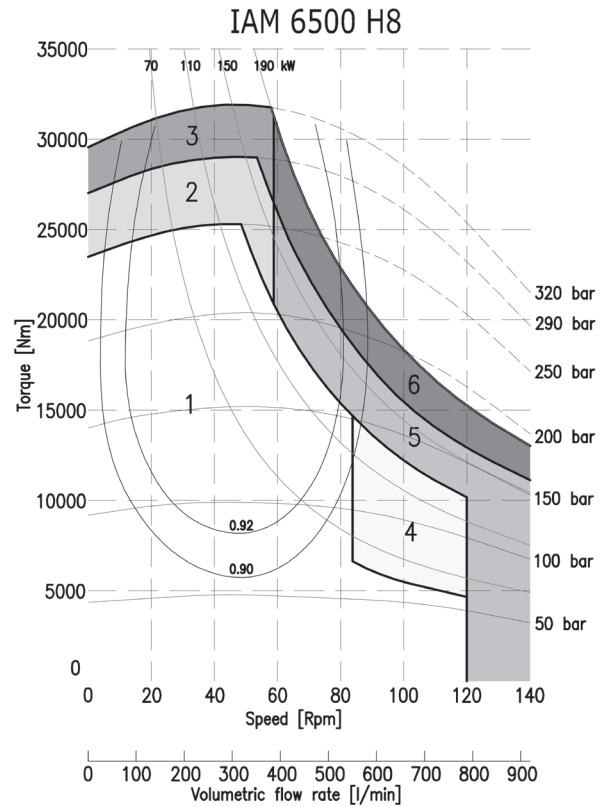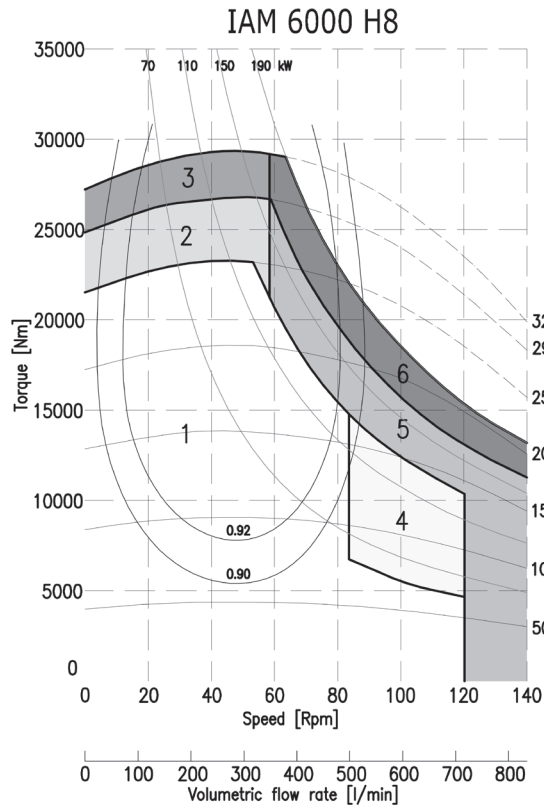

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

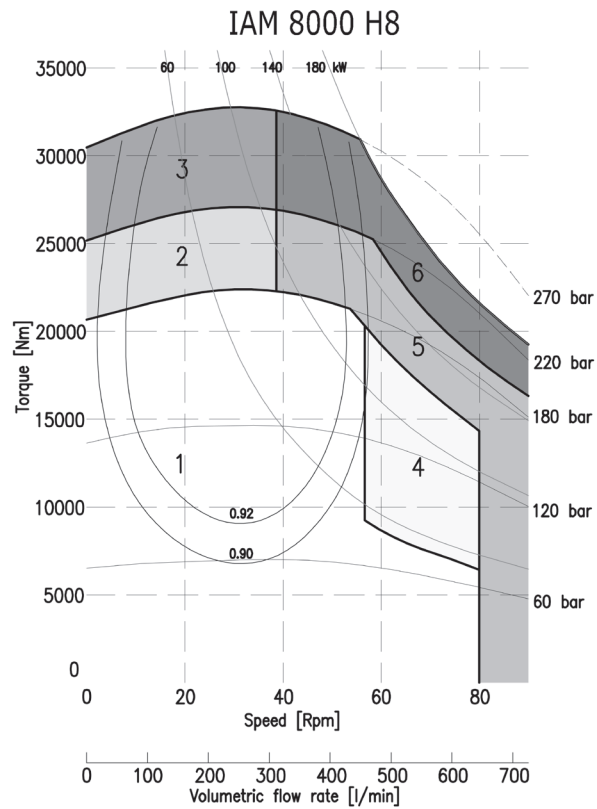

1	Continuous operation
2	Intermittent operation for period 3-5 minutes every 10-15 minutes
3	Intermittent operation for very short period (3-5 seconds every 10-15 minutes)

4	Continuous operation with flushing
5	Intermittent operation for period 3-5 minutes every 10-15 minutes with flushing
6	Intermittent operation for very short period (3-5 seconds every 10-15 minutes) with flushing

INTERMOT - ADVANCED - MOTORS

FLOW DISTRIBUTORS

***D31-D310-D40-D47-D55-
D75-D90-D200***



INDEX

D31-D310-D40-D47 - - - - -	<i>Pag.</i>	112
D55-D75-D90-D200 - - - - -	"	113



DISTRIBUTOR

BSP CONFIGURATION



D31

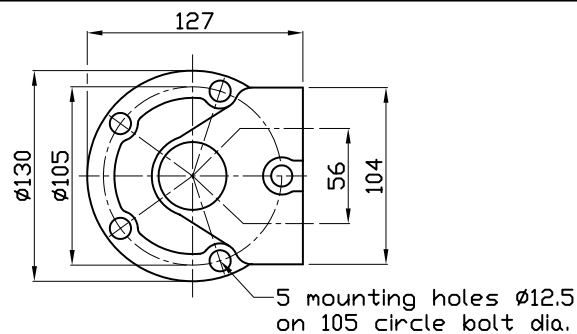

D310

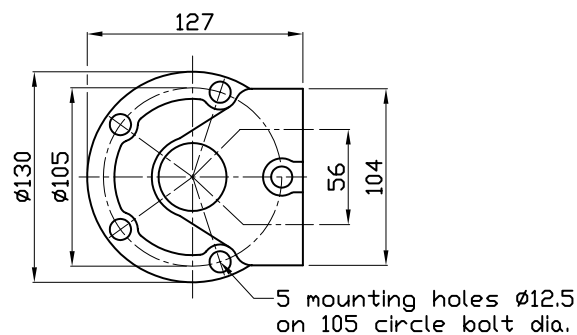



D40

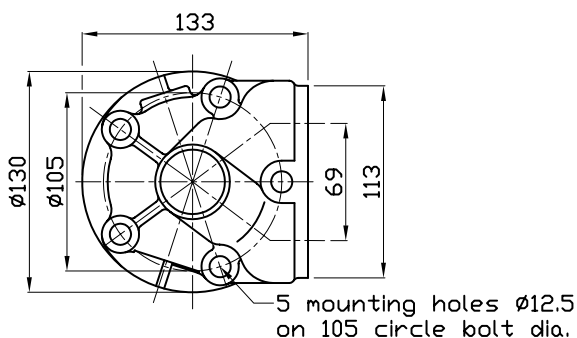


SAE CONFIGURATION

D47

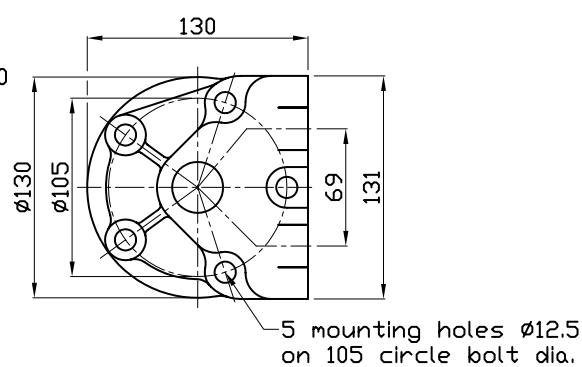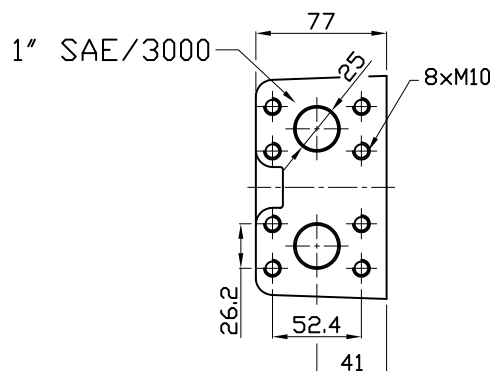


SAE CONFIGURATION


D55

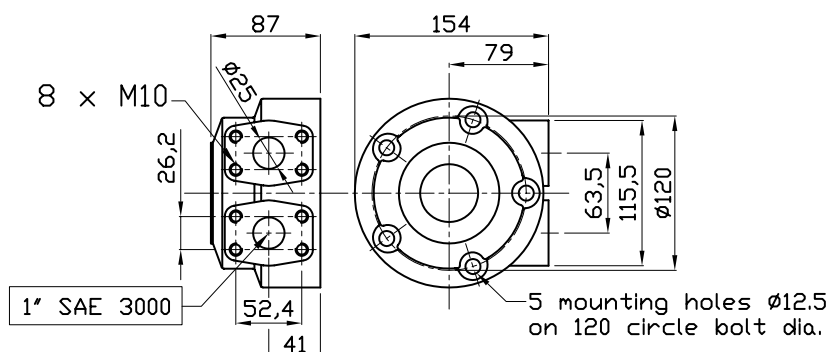


D75

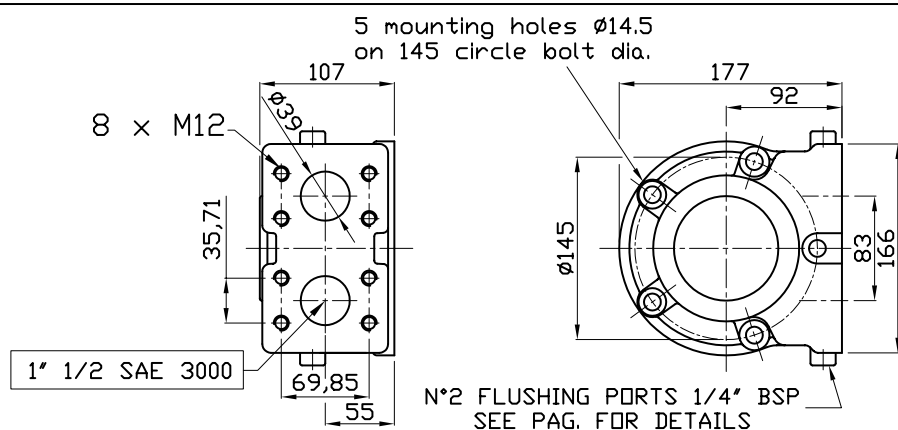

D90

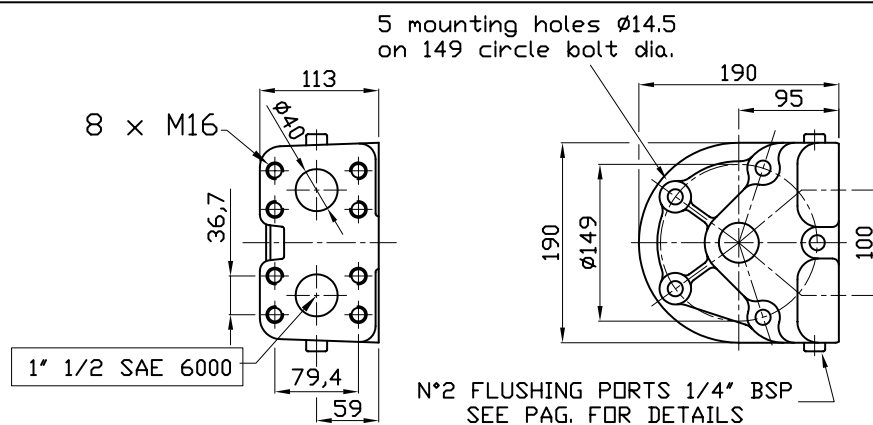


D200

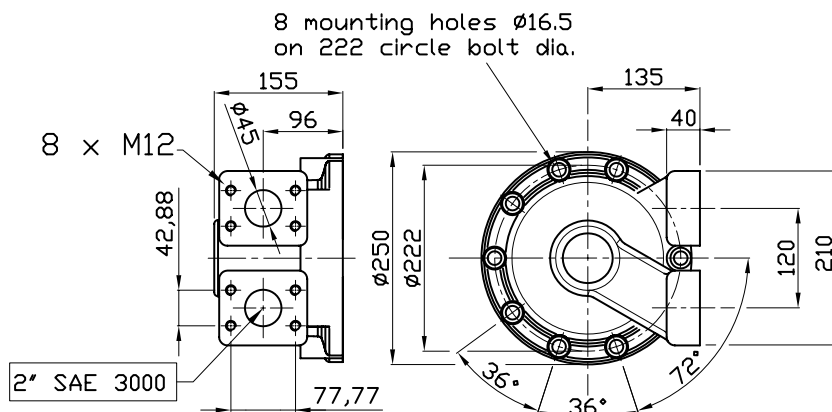


TACHOMETER



TA

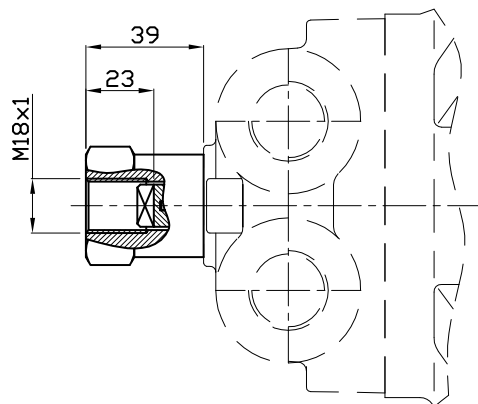


TB

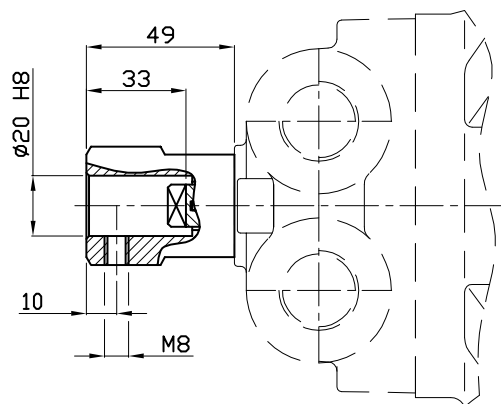

EST

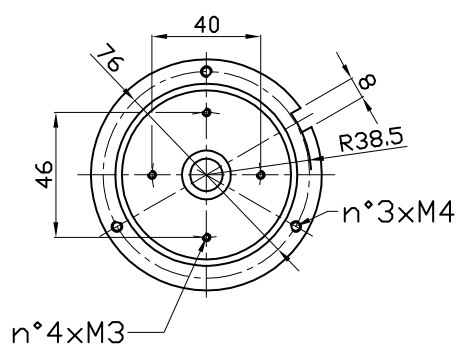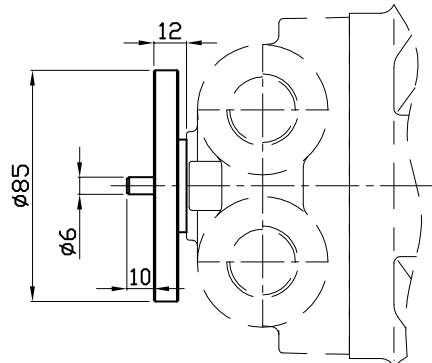


EST.30

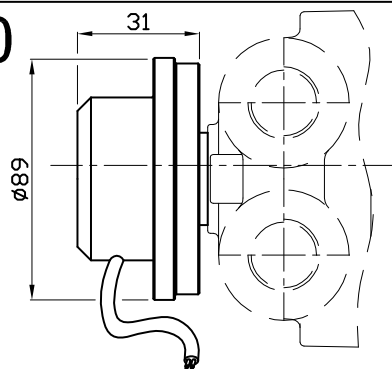


Operating parameters	E-..../3
Power supply (VDC)	10-30
Switching current (mA)	150
Frequency (Hz) 100rpm	50
Impulse/rpm	30
Operating temp. (°C)	-24/+70
Protection degree	IP67
Output	NPN
Motor type	All types
MODEL	Ø5
Torque	1 Nm

Model	Output	Fig.
E-..../.AP/....	PNP	D




TACHOMETER



TA

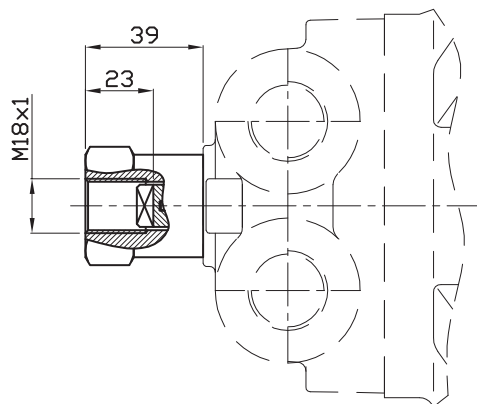


TB

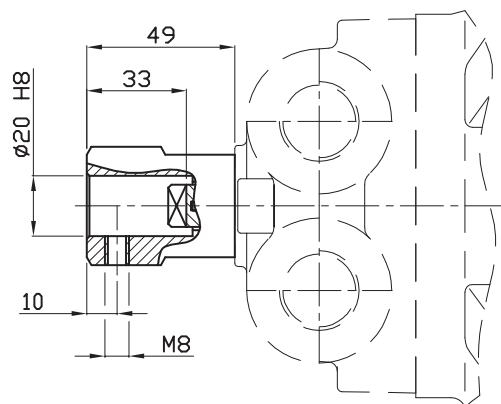

EST

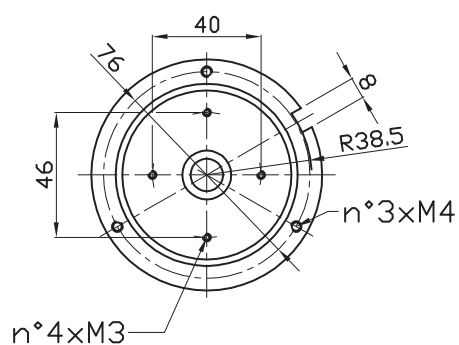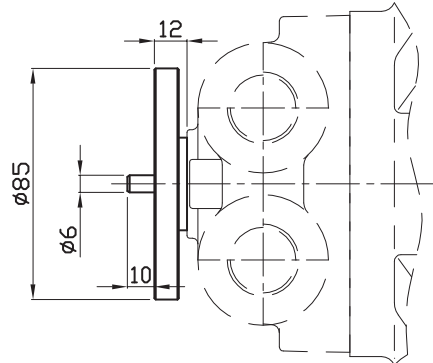


EST.30

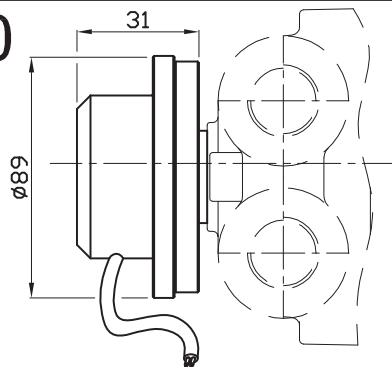


Operating parameters	E-..../3
Power supply (VDC)	10-30
Switching current (mA)	150
Frequency (Hz) 100rpm	50
Impulse/rpm	30
Operating temp. (°C)	-24/+70
Protection degree	IP67
Output	NPN
Motor type	All types
MODEL	Ø5
Torque	1 Nm

Model	Output	Fig.
E-..../.AP/....	PNP	D




SPLINE BILLET

SB1

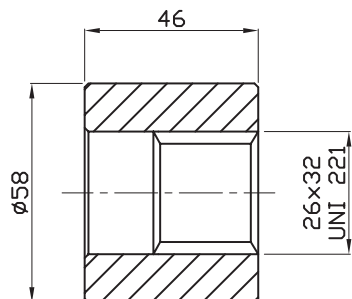


only for:
IAM 80, 100, 150,175,195 H1 A0
IAM 80, 100, 150,175,195 H1 A1

SB2

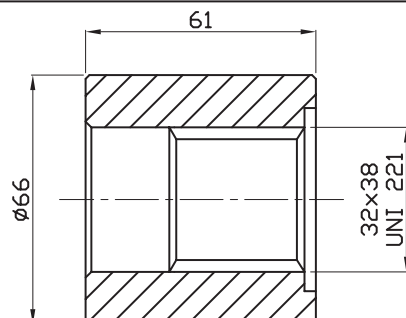


only for:
IAM 200,250,300 H1 A0
IAM 200,250,300,350 H2 A0
IAM 190/C H2 A0

SB3

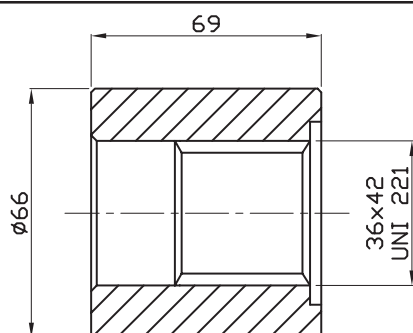


only for:
IAM 400,500,600 H2 A0
IAM 400,450,500,600,650,700 H3 A0

SB4

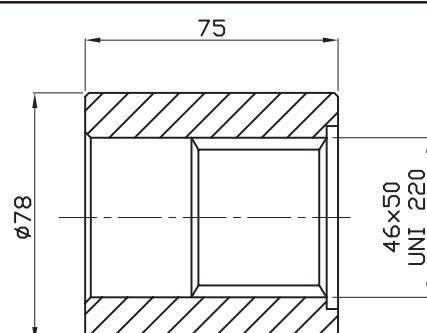


only for:
IAM 800 H3 A0
IAM 800/N H3 A0
IAM H4 A0

SB5

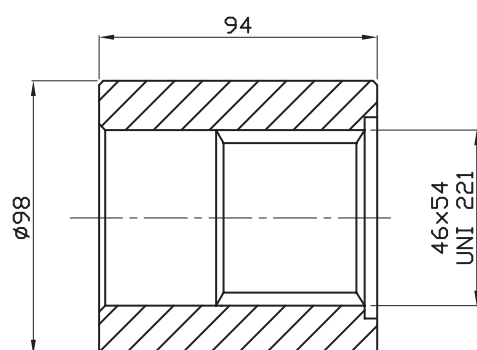


only for:
IAM 450/C H3 A1
IAM H4 A1

SB6

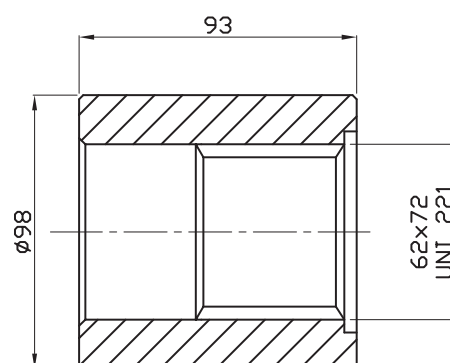


only for:
IAM H5 A0
IAM 1200/C,1400/C,1500/C H5 A0

SB7

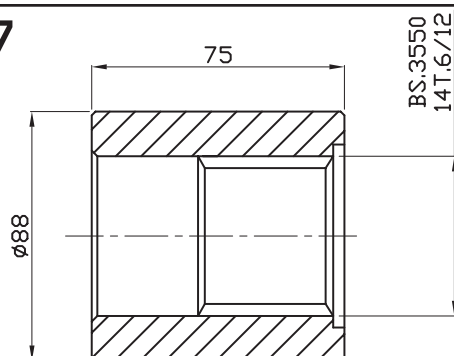


only for:
IAM H5 A1
IAM 1000/B60,1400/B80,1600/B100 H5 A1

SB8

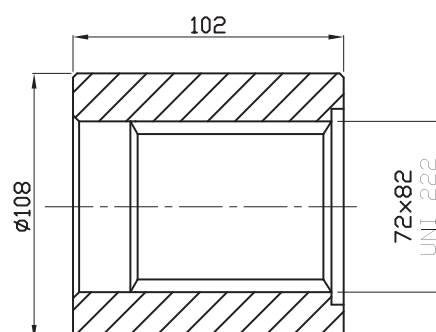


only for:
IAM 1600/C,1800/C,2000/C,2200/C H5 A0

SB9

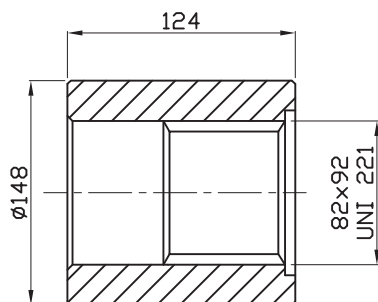


only for:
IAM H6 A0
IAM H6/C A0
IAM 2200/B125,2500/B150,3000/B200 H6 A0

SB10

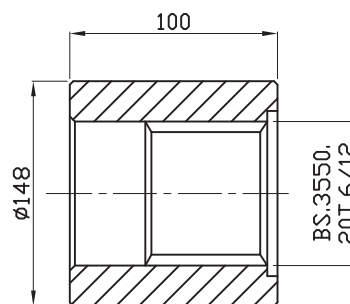


only for:
IAM H6 A1
IAM H6/C A1
IAM 2200/B125,2500/B150,3000/B200 H6 A1
IAM H7 A1
IAM H8 A1

SB11

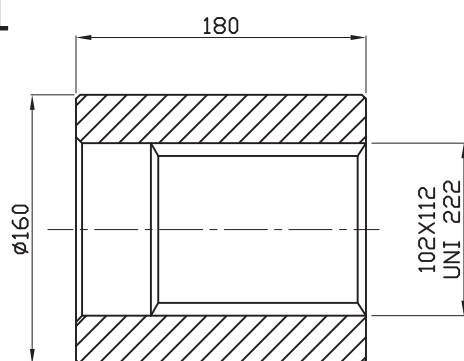


only for:
IAM H7/C A0

SB12

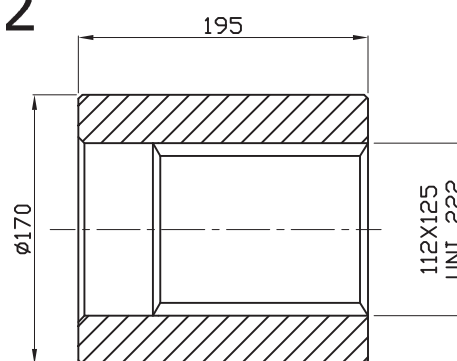


only for:
IAM H8/C A0

SB14

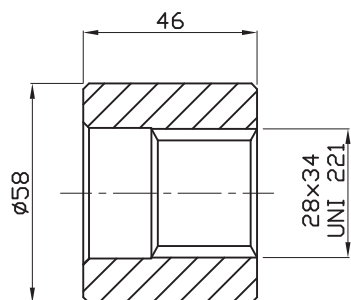


only for:
IAM H1/GM1
IAM H1/BH

SB15

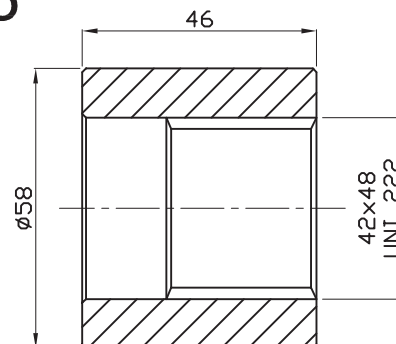


only for:
IAM 300/C H2 A0

SB16

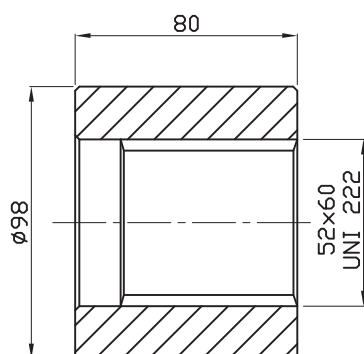

only for:
IAM 700/C,800/C H4 A0


SB17

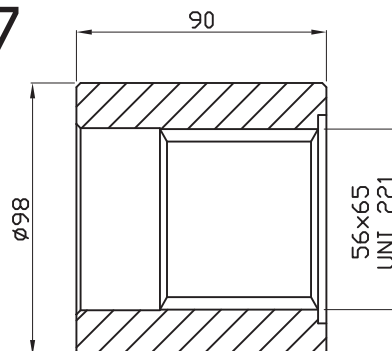

only for:
IAM H5/GM5 A0
IAM H5/S A0


CONVERSION FLANGES

FL1

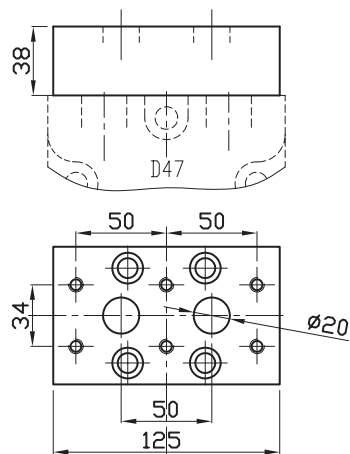


Connection block, fitting D47 distributor, for motor MR 160/190/250/300

FL2

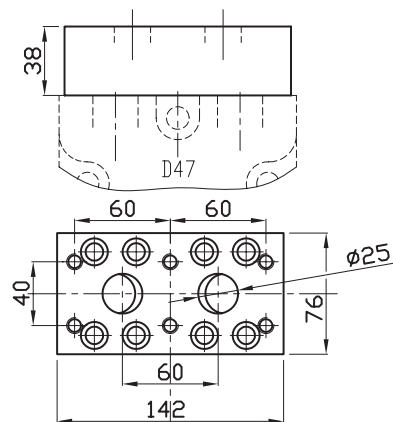


Connection block, fitting D47 distributor, for motor MR 350/450/500/600/700/800

FL3

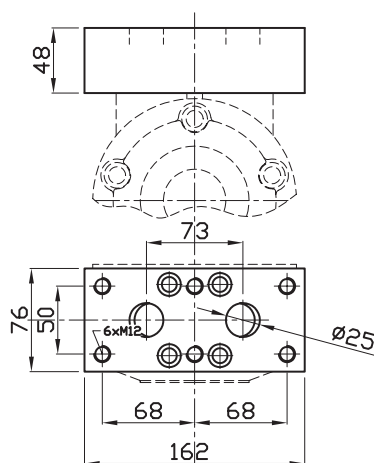


Connection block, fitting D55 distributor, for motor MR 1100/1400/1600/1800/2100

FL4

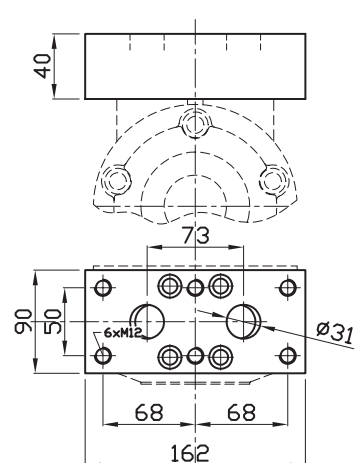


Connection block, fitting D75 distributor, for motor MR 1100/1400/1600/1800/2100

FL5

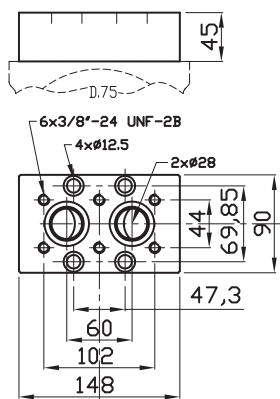


S03 plate for D75

FL6

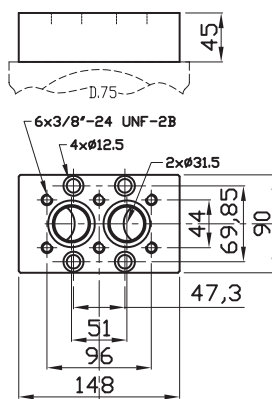

S04 plate for D75

FL7

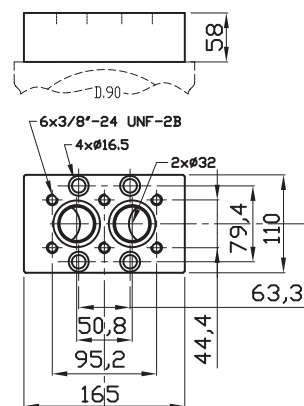

S04 plate for D90