


PR 160

Technical data

PR 161			PR 162			PR 163			PR 164			PRA 162			PRA 163			PRA 164		
n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM			n ₁ max 2800 RPM		
Pt(kW) 12			Pt(kW) 8			Pt(kW) 5			Pt(kW) 1,5			Pt(kW) 8			Pt(kW) 5			Pt(kW) 1,5		
i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm	i	Mc daNm	Mmax daNm
3,55	170	340	12,6	170	340	54,1	170	340	365,7	170	340	10,4	170	340	37,0	170	340	131,8	170	340
4,28	170	340	15,2	170	340	65,3	170	340	396,4	170	340	12,5	170	340	44,6	170	340	158,9	170	340
5,60	121	242	19,9	170	340	70,7	170	340	440,8	170	340	16,4	121	242	53,8	170	340	191,5	170	340
6,75	100	200	23,9	170	340	78,7	170	340	477,8	170	340	19,7	100	200	58,4	170	340	207,6	170	340
			28,9	170	340	85,3	170	340	531,3	170	340				70,3	170	340	230,8	170	340
			31,3	121	242	102,8	170	340	575,9	170	340				84,8	170	340	301,7	170	340
			37,8	121	242	111,5	170	340	624,4	170	340				91,9	121	242	327,0	170	340
			45,5	100	200	134,3	170	340	694,2	170	340				110,8	121	242	363,6	170	340
			58,5	100	200	161,9	170	340	752,6	170	340				133,6	100	200	394,2	170	340
						172,5	170	340	836,8	170	340				171,5	100	200	475,1	170	340
						207,9	170	340	907,1	170	340							515,3	121	242
						211,6	121	242	966,3	170	340							572,7	170	340
						255,1	121	242	1093,4	170	340							610,1	170	340
						271,7	121	242	1144,5	170	340							735,4	170	340
						307,5	100	200	1185,4	121	242							797,2	121	242
						327,5	121	242	1318,0	170	340							960,9	121	242
						394,8	100	200	1428,8	121	242							1158,2	100	200
									1692,3	170	340							1233,7	121	242
									3422,1	100	200							1487,1	100	200


MODELLO - MODEL		PR 161			PR 162			PR 163			PR 164			PRA 162			PRA 163			PRA 164		
TIPO USCITA - OUTPUT TYPE		M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P	M	F	P
PESO - WEIGHT Kg.		15	13	17	21	19	23	27	25	29	33	31	35	30	28	32	36	34	38	42	40	44
Olio - Oil Lt.	Orizzontale - Horizontal	0,6	0,5	0,6	0,8	0,7	0,8	1,0	0,9	1,0	1,2	1,1	1,2	2,1	2,0	2,4	2,3	2,2	2,6	2,5	2,4	2,8
	Verticale - Vertical	1,2	1,0	1,2	1,6	1,4	1,6	2,0	1,8	2,0	2,4	2,2	2,4	4,2	4,0	4,8	4,6	4,4	5,2	5,0	4,8	5,6

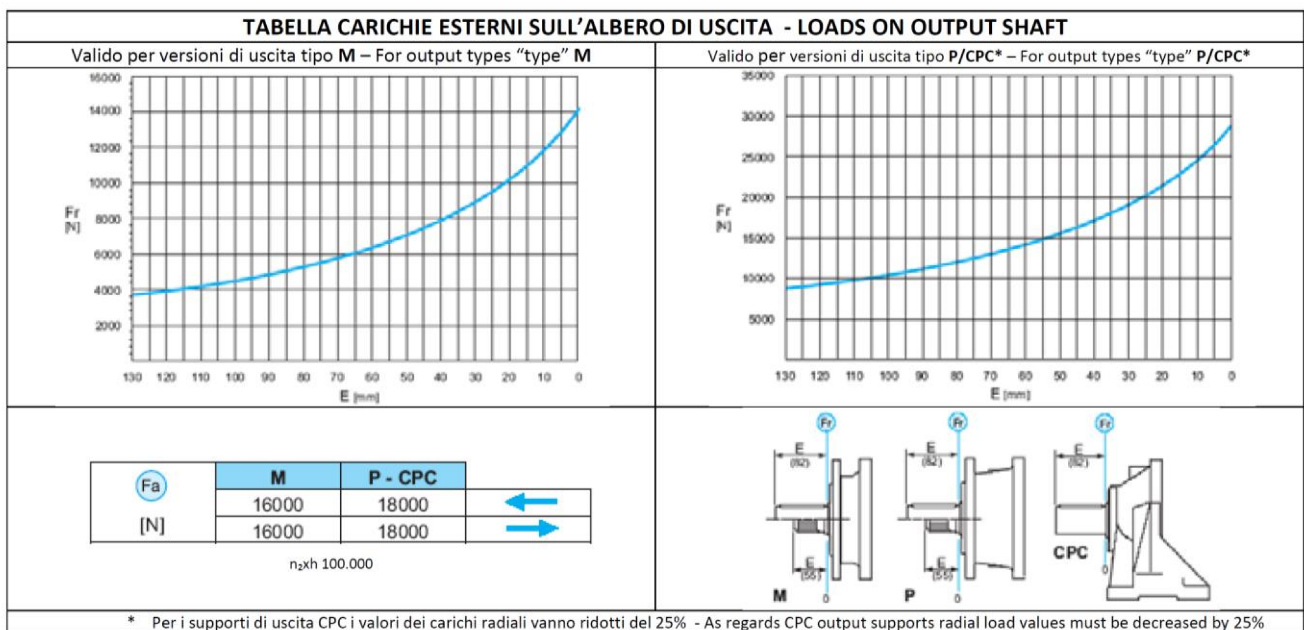

The data specified into this catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Intermot reserves the right to implement modification without notice. 12


PR 160

Dimensional drawings

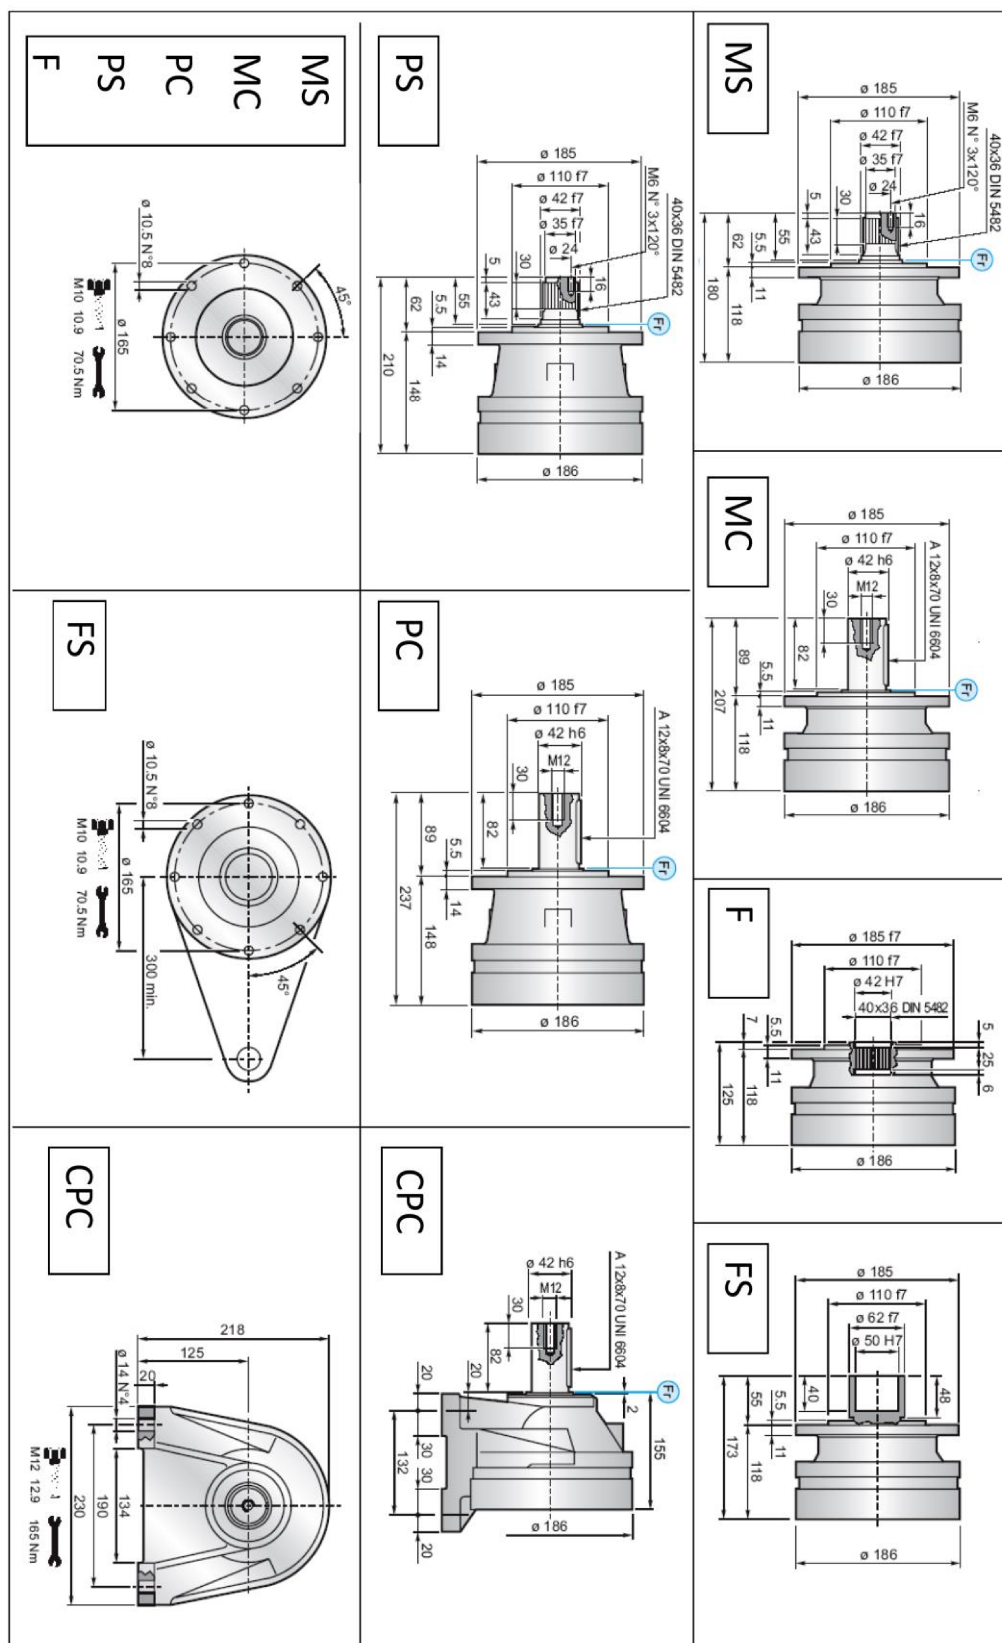


PR 160


Special versions





PE



MCT



	VERSIONE USCITA – OUTPUT TYPE				ENTRATA TIPO INPUT TYPE
	MC – MS MCT	F – FS	PC – PS PE	CPC	
PR 161	A 118	A 118	A 148	A 148	A
PR 162	A 166	A 166	A 196	A 196	A
PR 163	A 214	A 214	A 244	A 244	A
PR 164	A 262	A 262	A 292	A 292	A

	VERSIONE USCITA – OUTPUT TYPE				ENTRATA TIPO INPUT TYPE
	MC – MS MCT	F – FS	PC – PS PE	CPC	
PRA 162	A 193, B 159	A 193, B 159	A 223, B 159	A 230, B 159	A
PRA 163	A 241, B 159	A 241, B 159	A 271, B 159	A 278, B 159	A
PRA 164	A 289, B 159	A 289, B 159	A 319, B 159	A 326, B 159	A

